




019-320-88-112

Netrack standing server cabinet
32U/800x800mm - perforated door

019-320-88-112

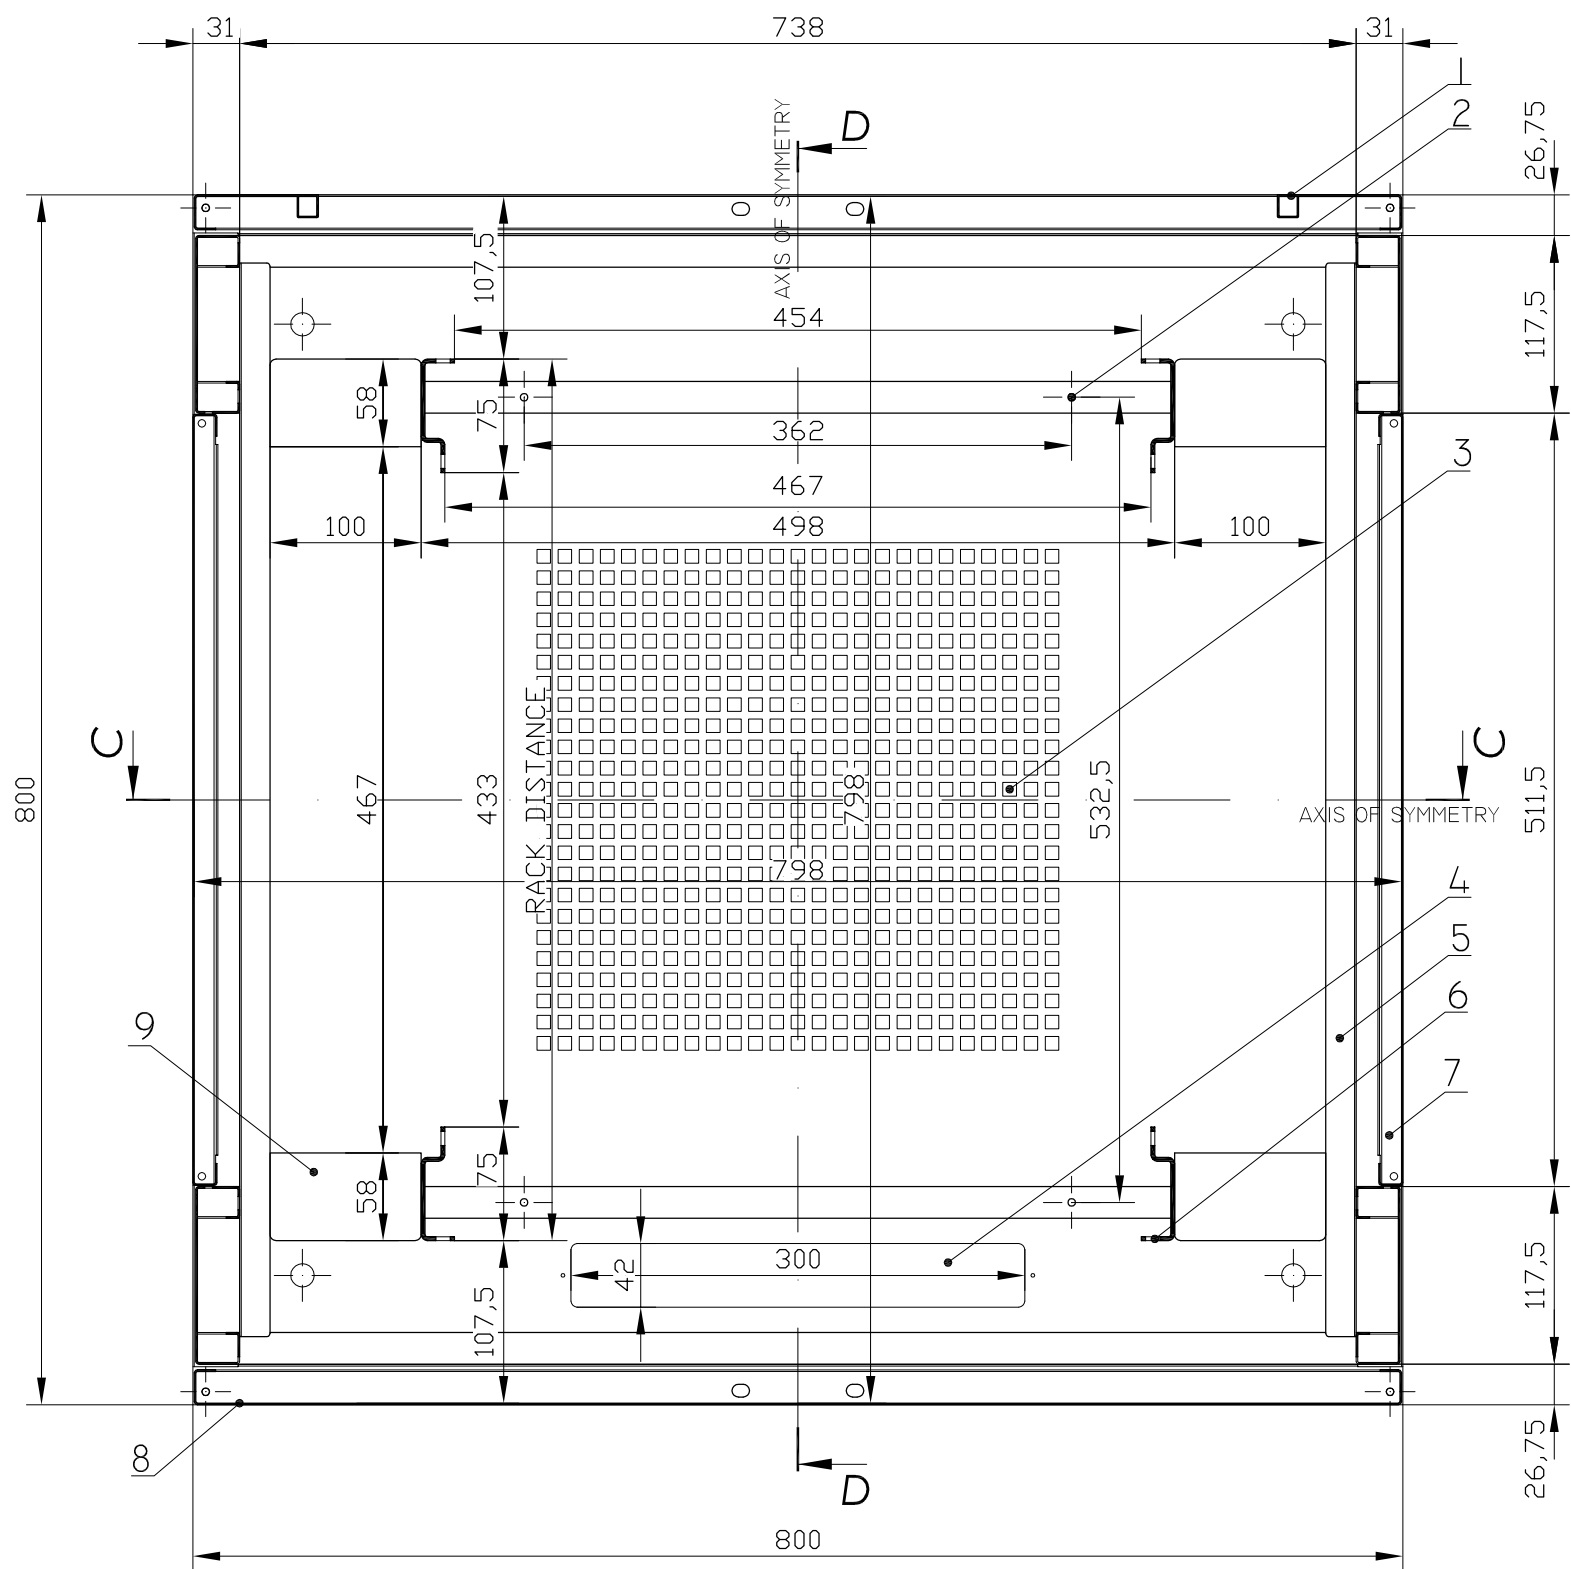


- 1. PERFORATED FRONT DOOR
- 2. HOLE FOR FAN UNIT INSTALLATION
- 3. VENTILATION HOLES
- 4. TOP BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. SPACER

RACK DISTANCES

NETRACK STANDARD	583MM
MAXIMUM	727MM
MINIMUM	167MM

SECTION A-A
- TOP COVER VIEW

019-320-88-112

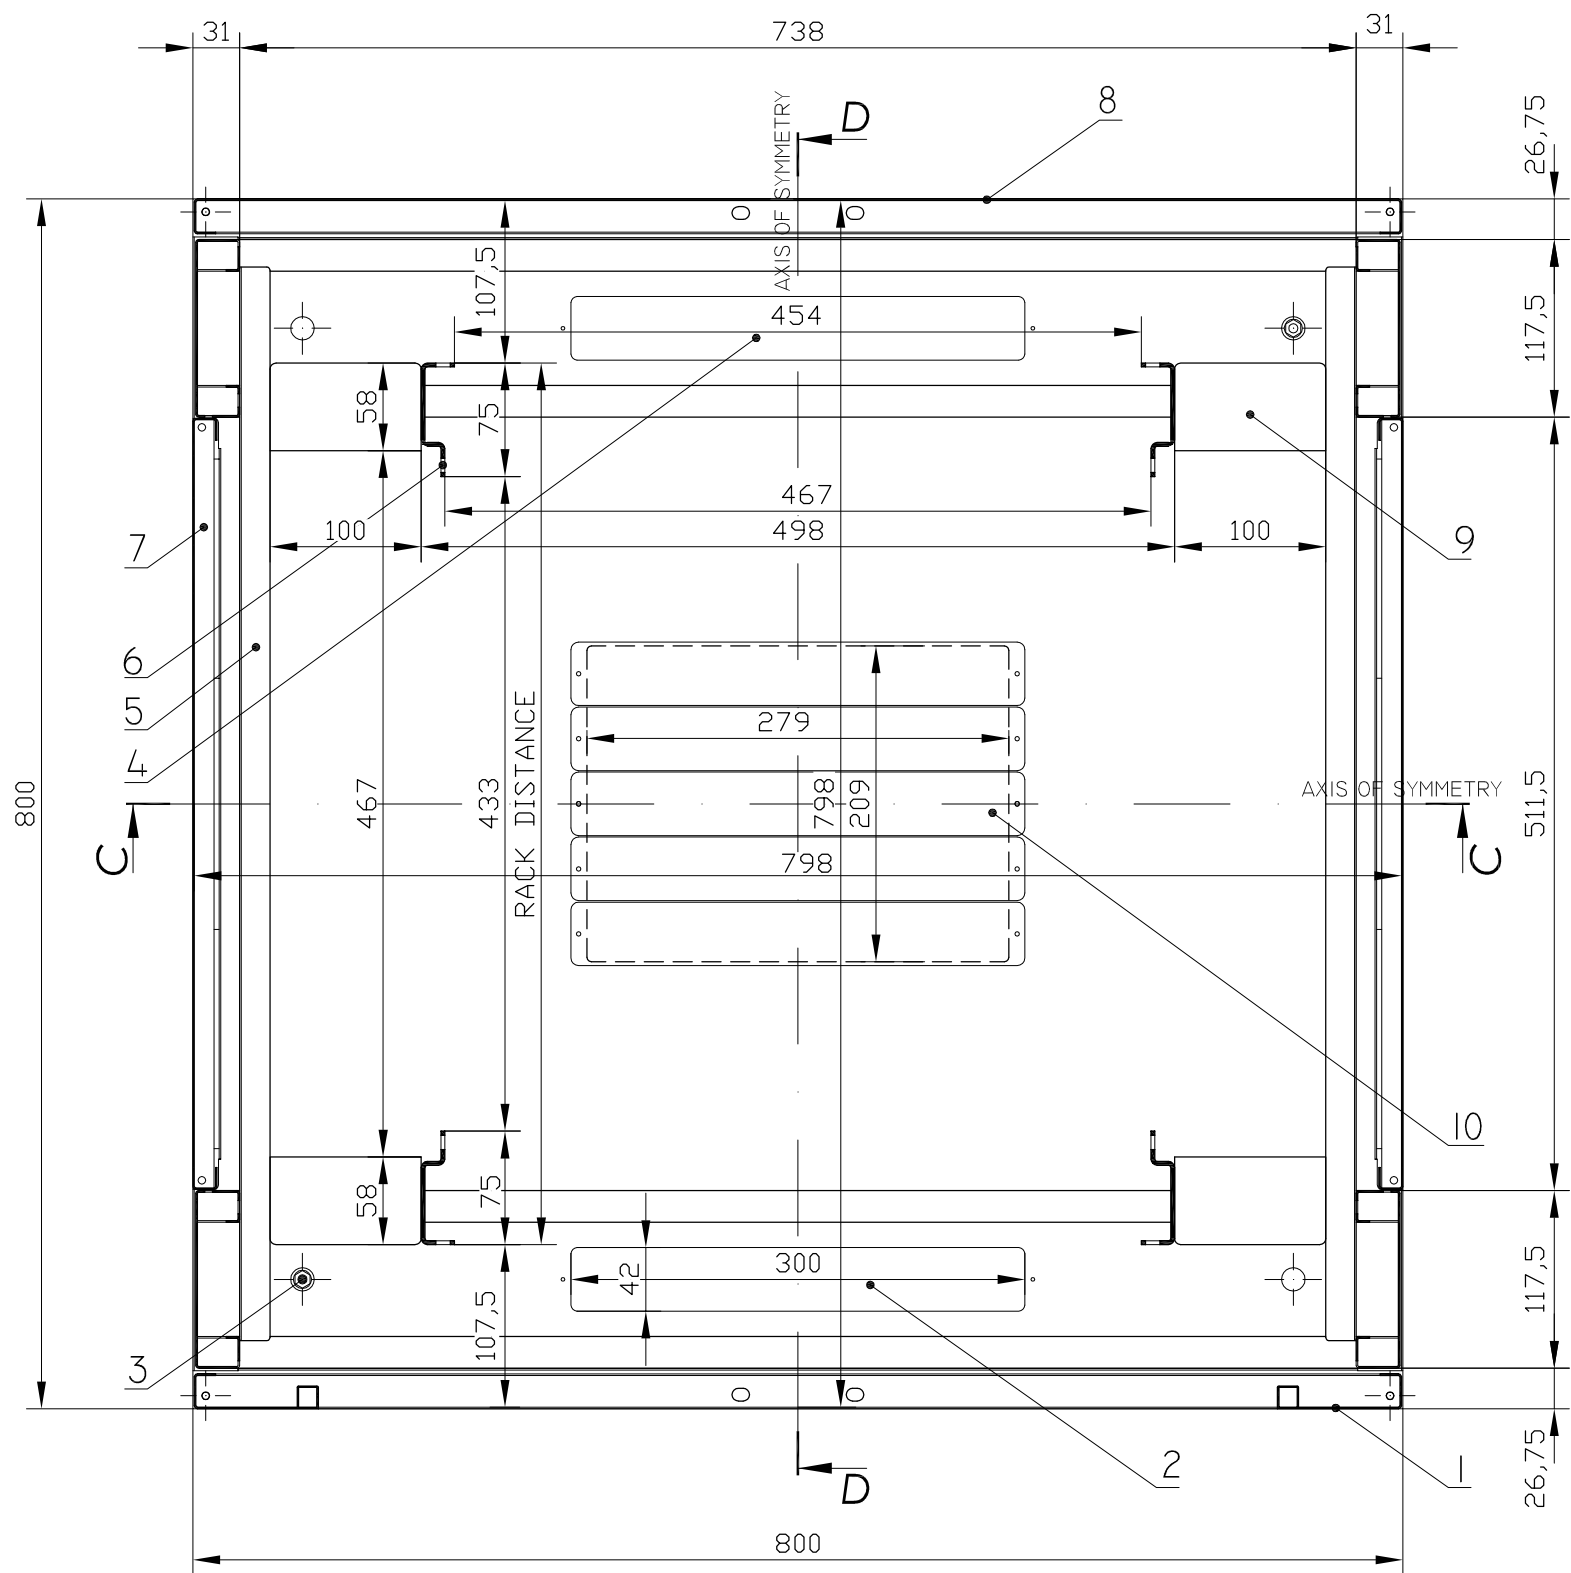


- 1. PERFORATED FRONT DOOR
- 2. BOTTOM FRONT CABLE ENTRY
- 3. GROUND CONNECTION BOLT IN THE CABINET
- 4. BOTTOM BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. SPACER
- 10. BOTTOM CENTRAL CABLE ENTRY

RACK DISTANCES

NETRACK STANDARD	583MM
MAXIMUM	727MM
MINIMUM	167MM


SECTION B-B
-BOTTOM PANEL VIEW

019-320-88-112

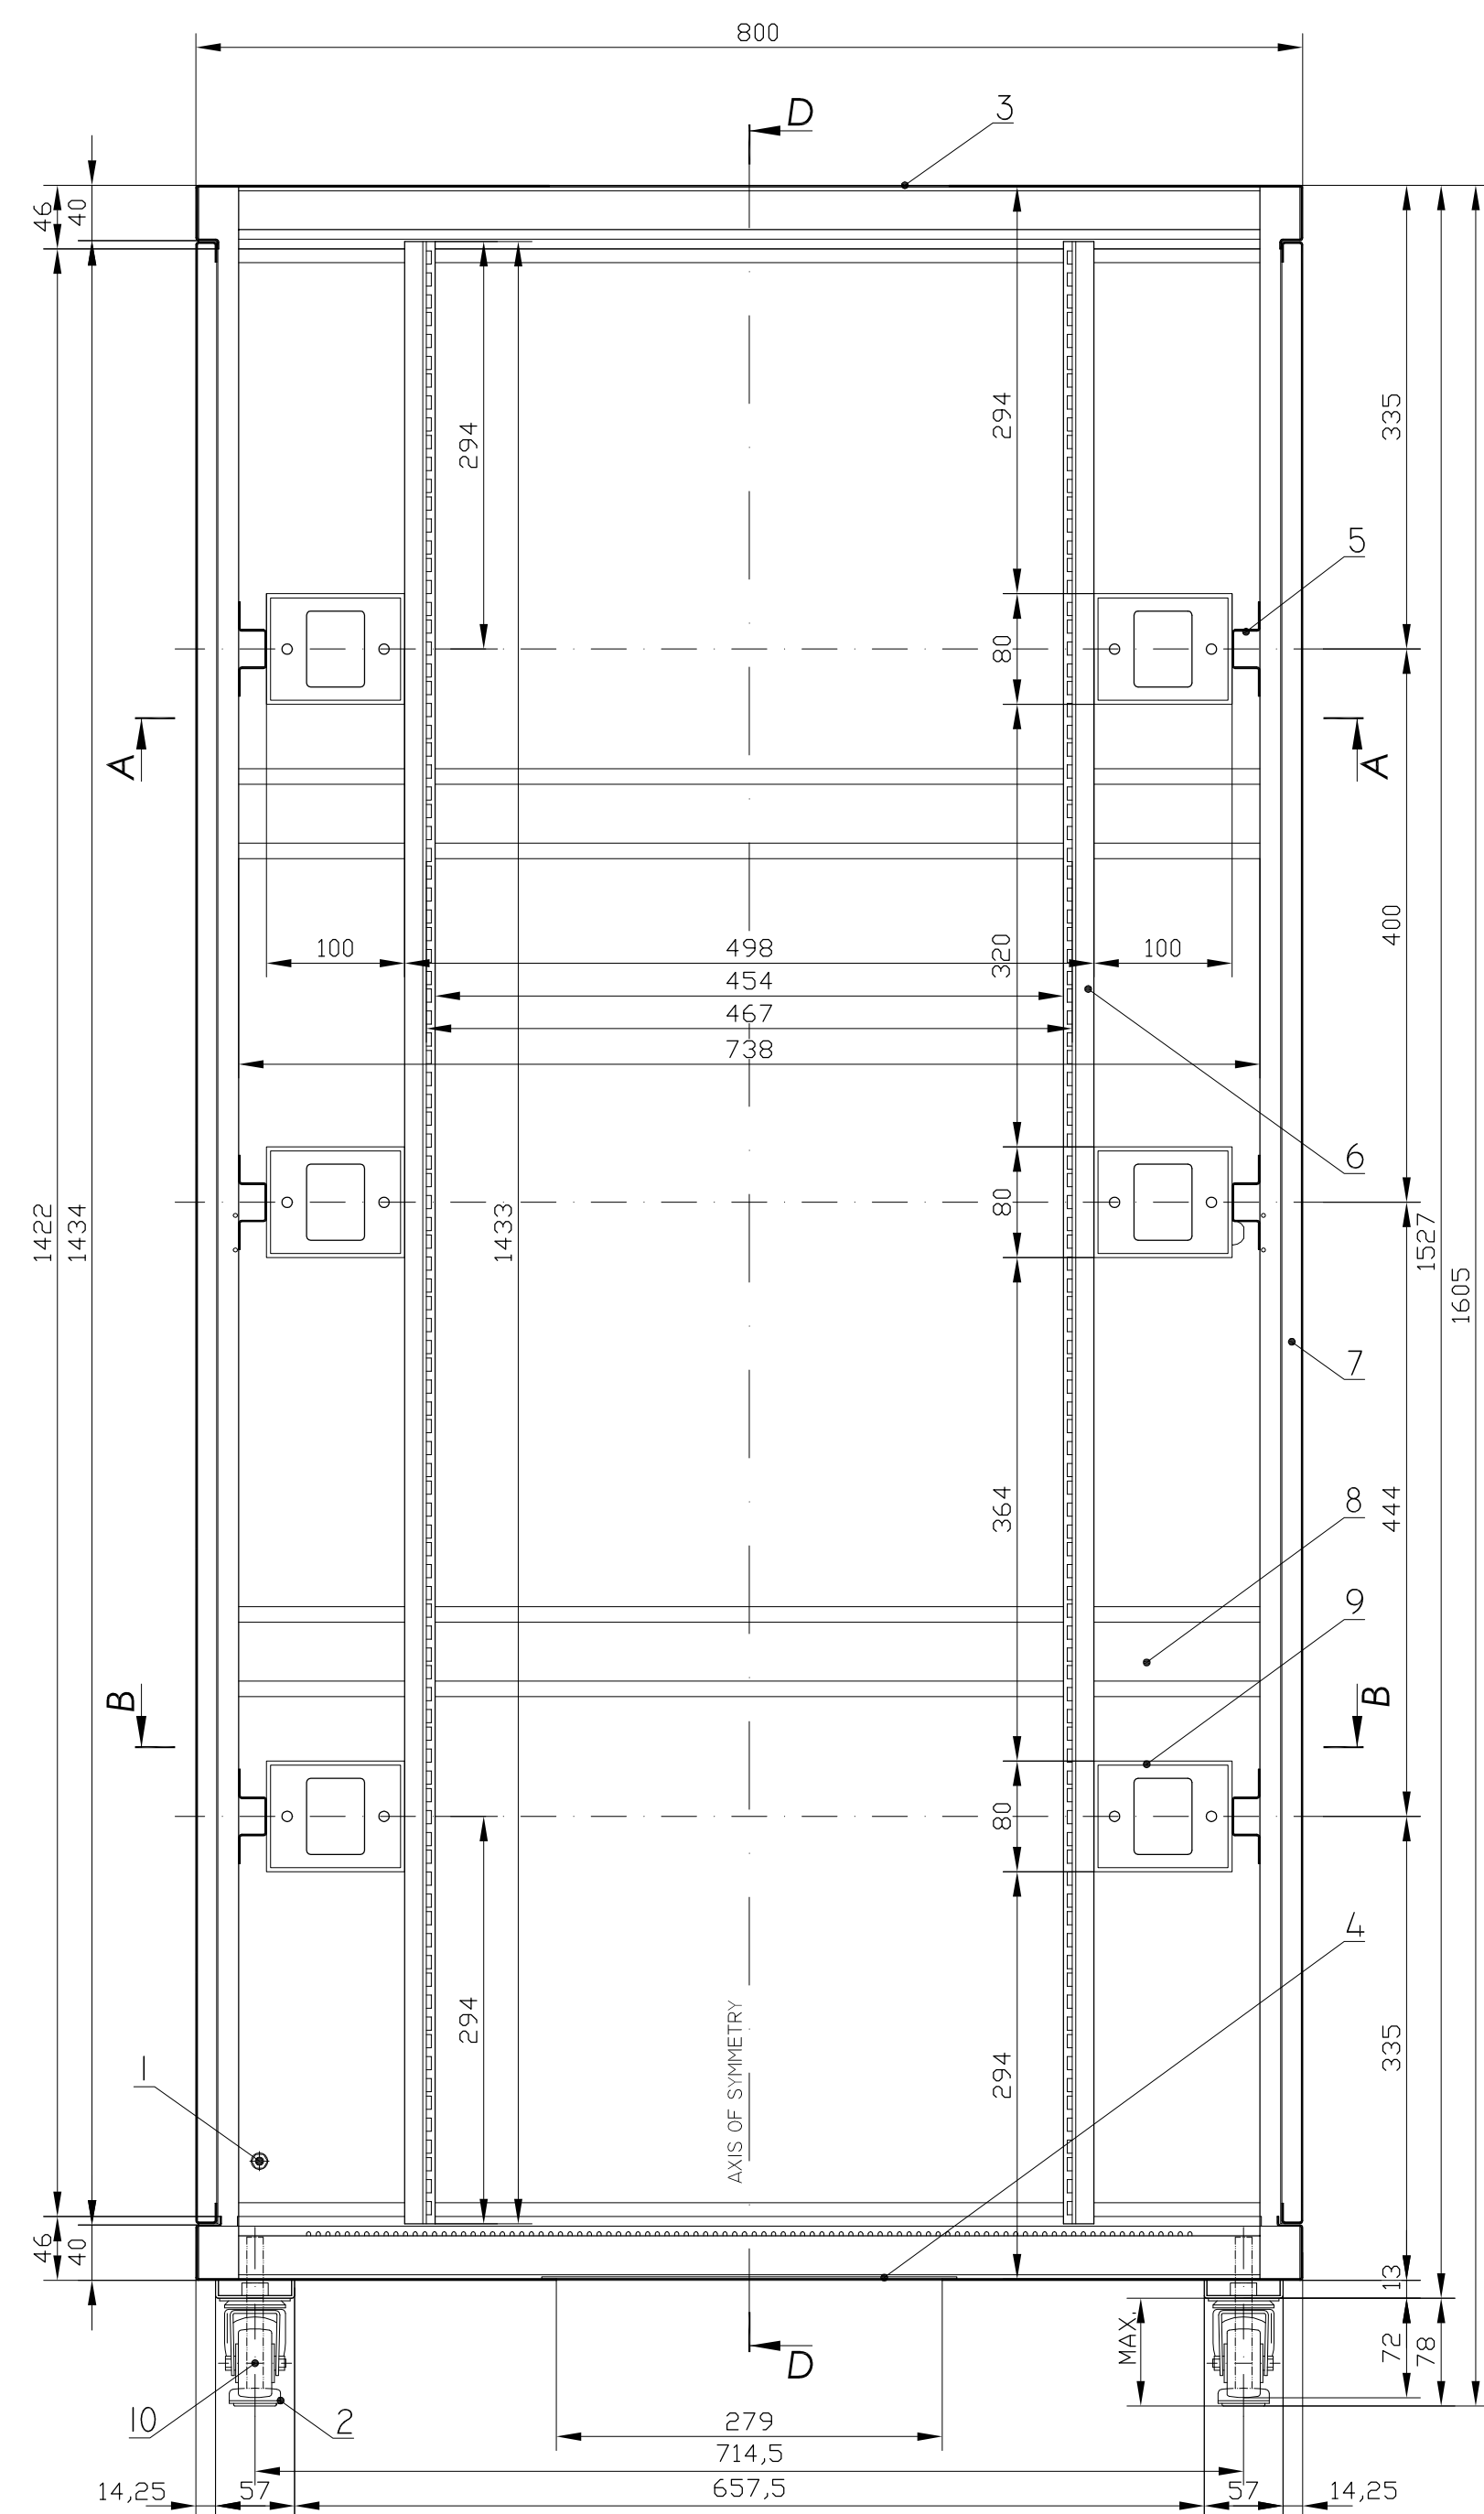

1. GROUND CONECTION BOLT IN THE DOOR
2. ADJUSTABLE FEET
3. VENTILATION HOLES
4. BOTTOM CENTRAL CABLE ENTRY
5. ANGLE MOUNTING BRACKET BAR
6. MOUNTING SPARE RACK PROFILE
7. SIDE PANEL
8. STEEL REAR DOOR
9. SPACER
10. 2" CASTOR WHEELS

SECTION C-C

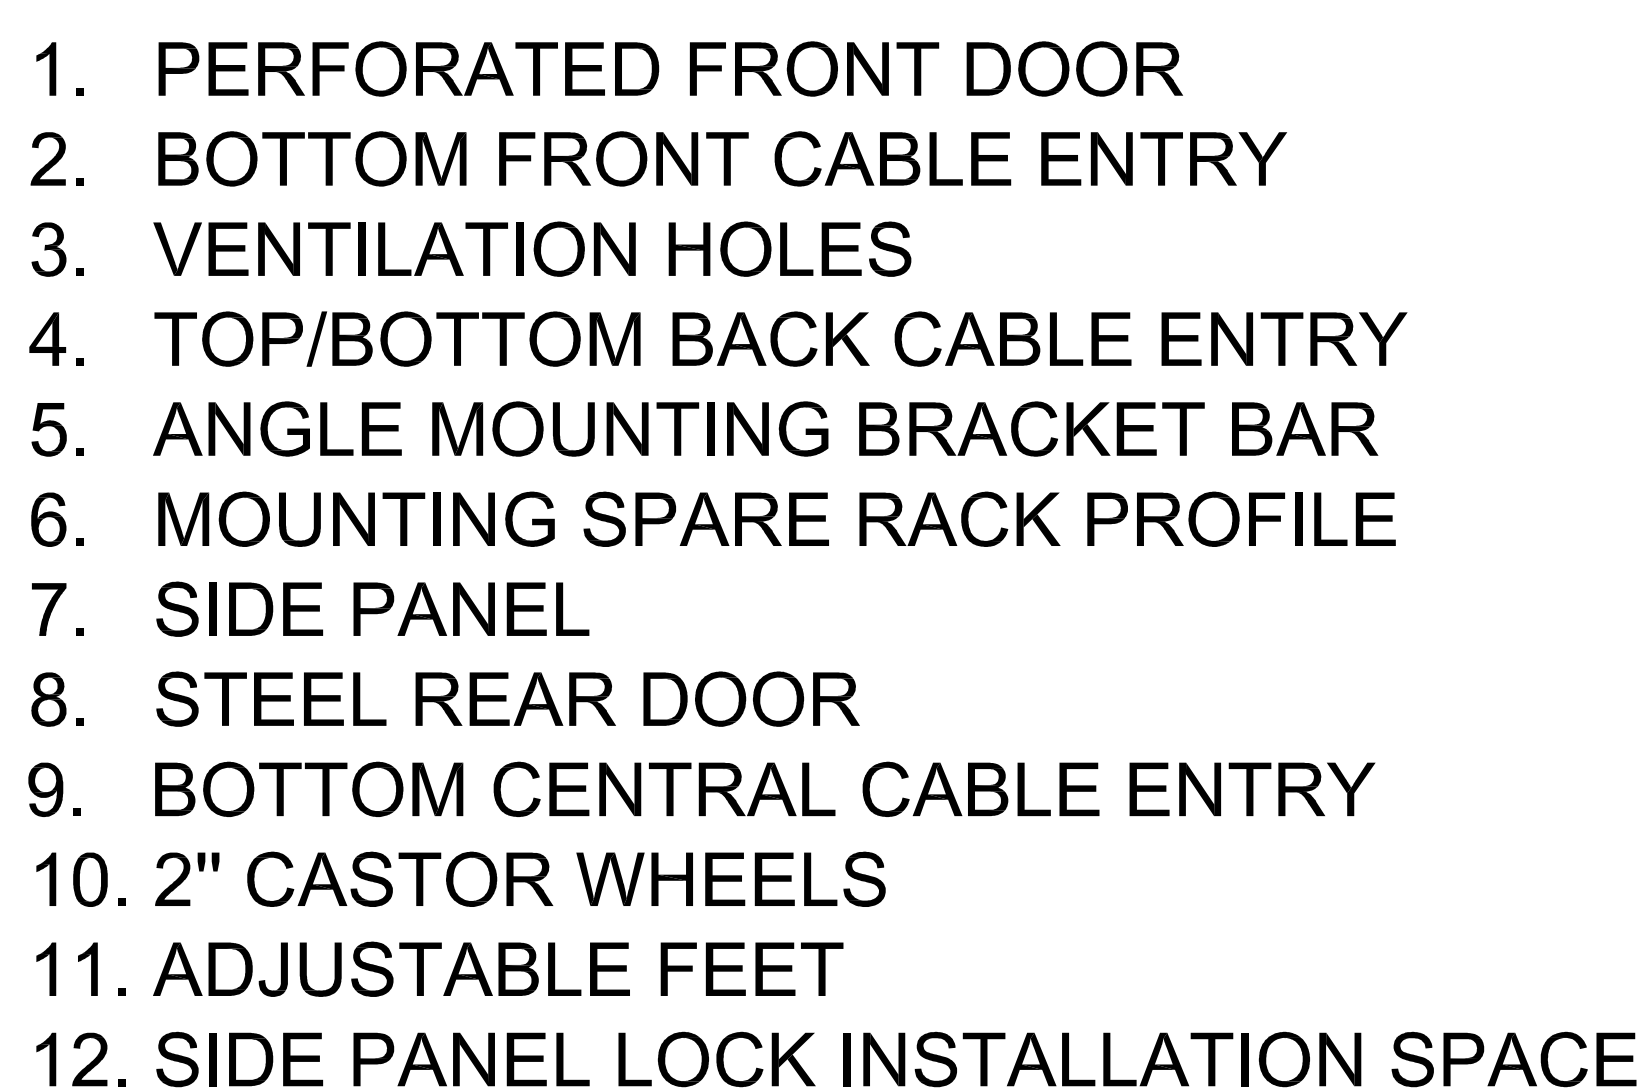


RACK DISTANCES

NETRACK STANDARD	583MM
MAXIMUM	727MM
MINIMUM	167MM

SECTION D-D


019-320-88-112

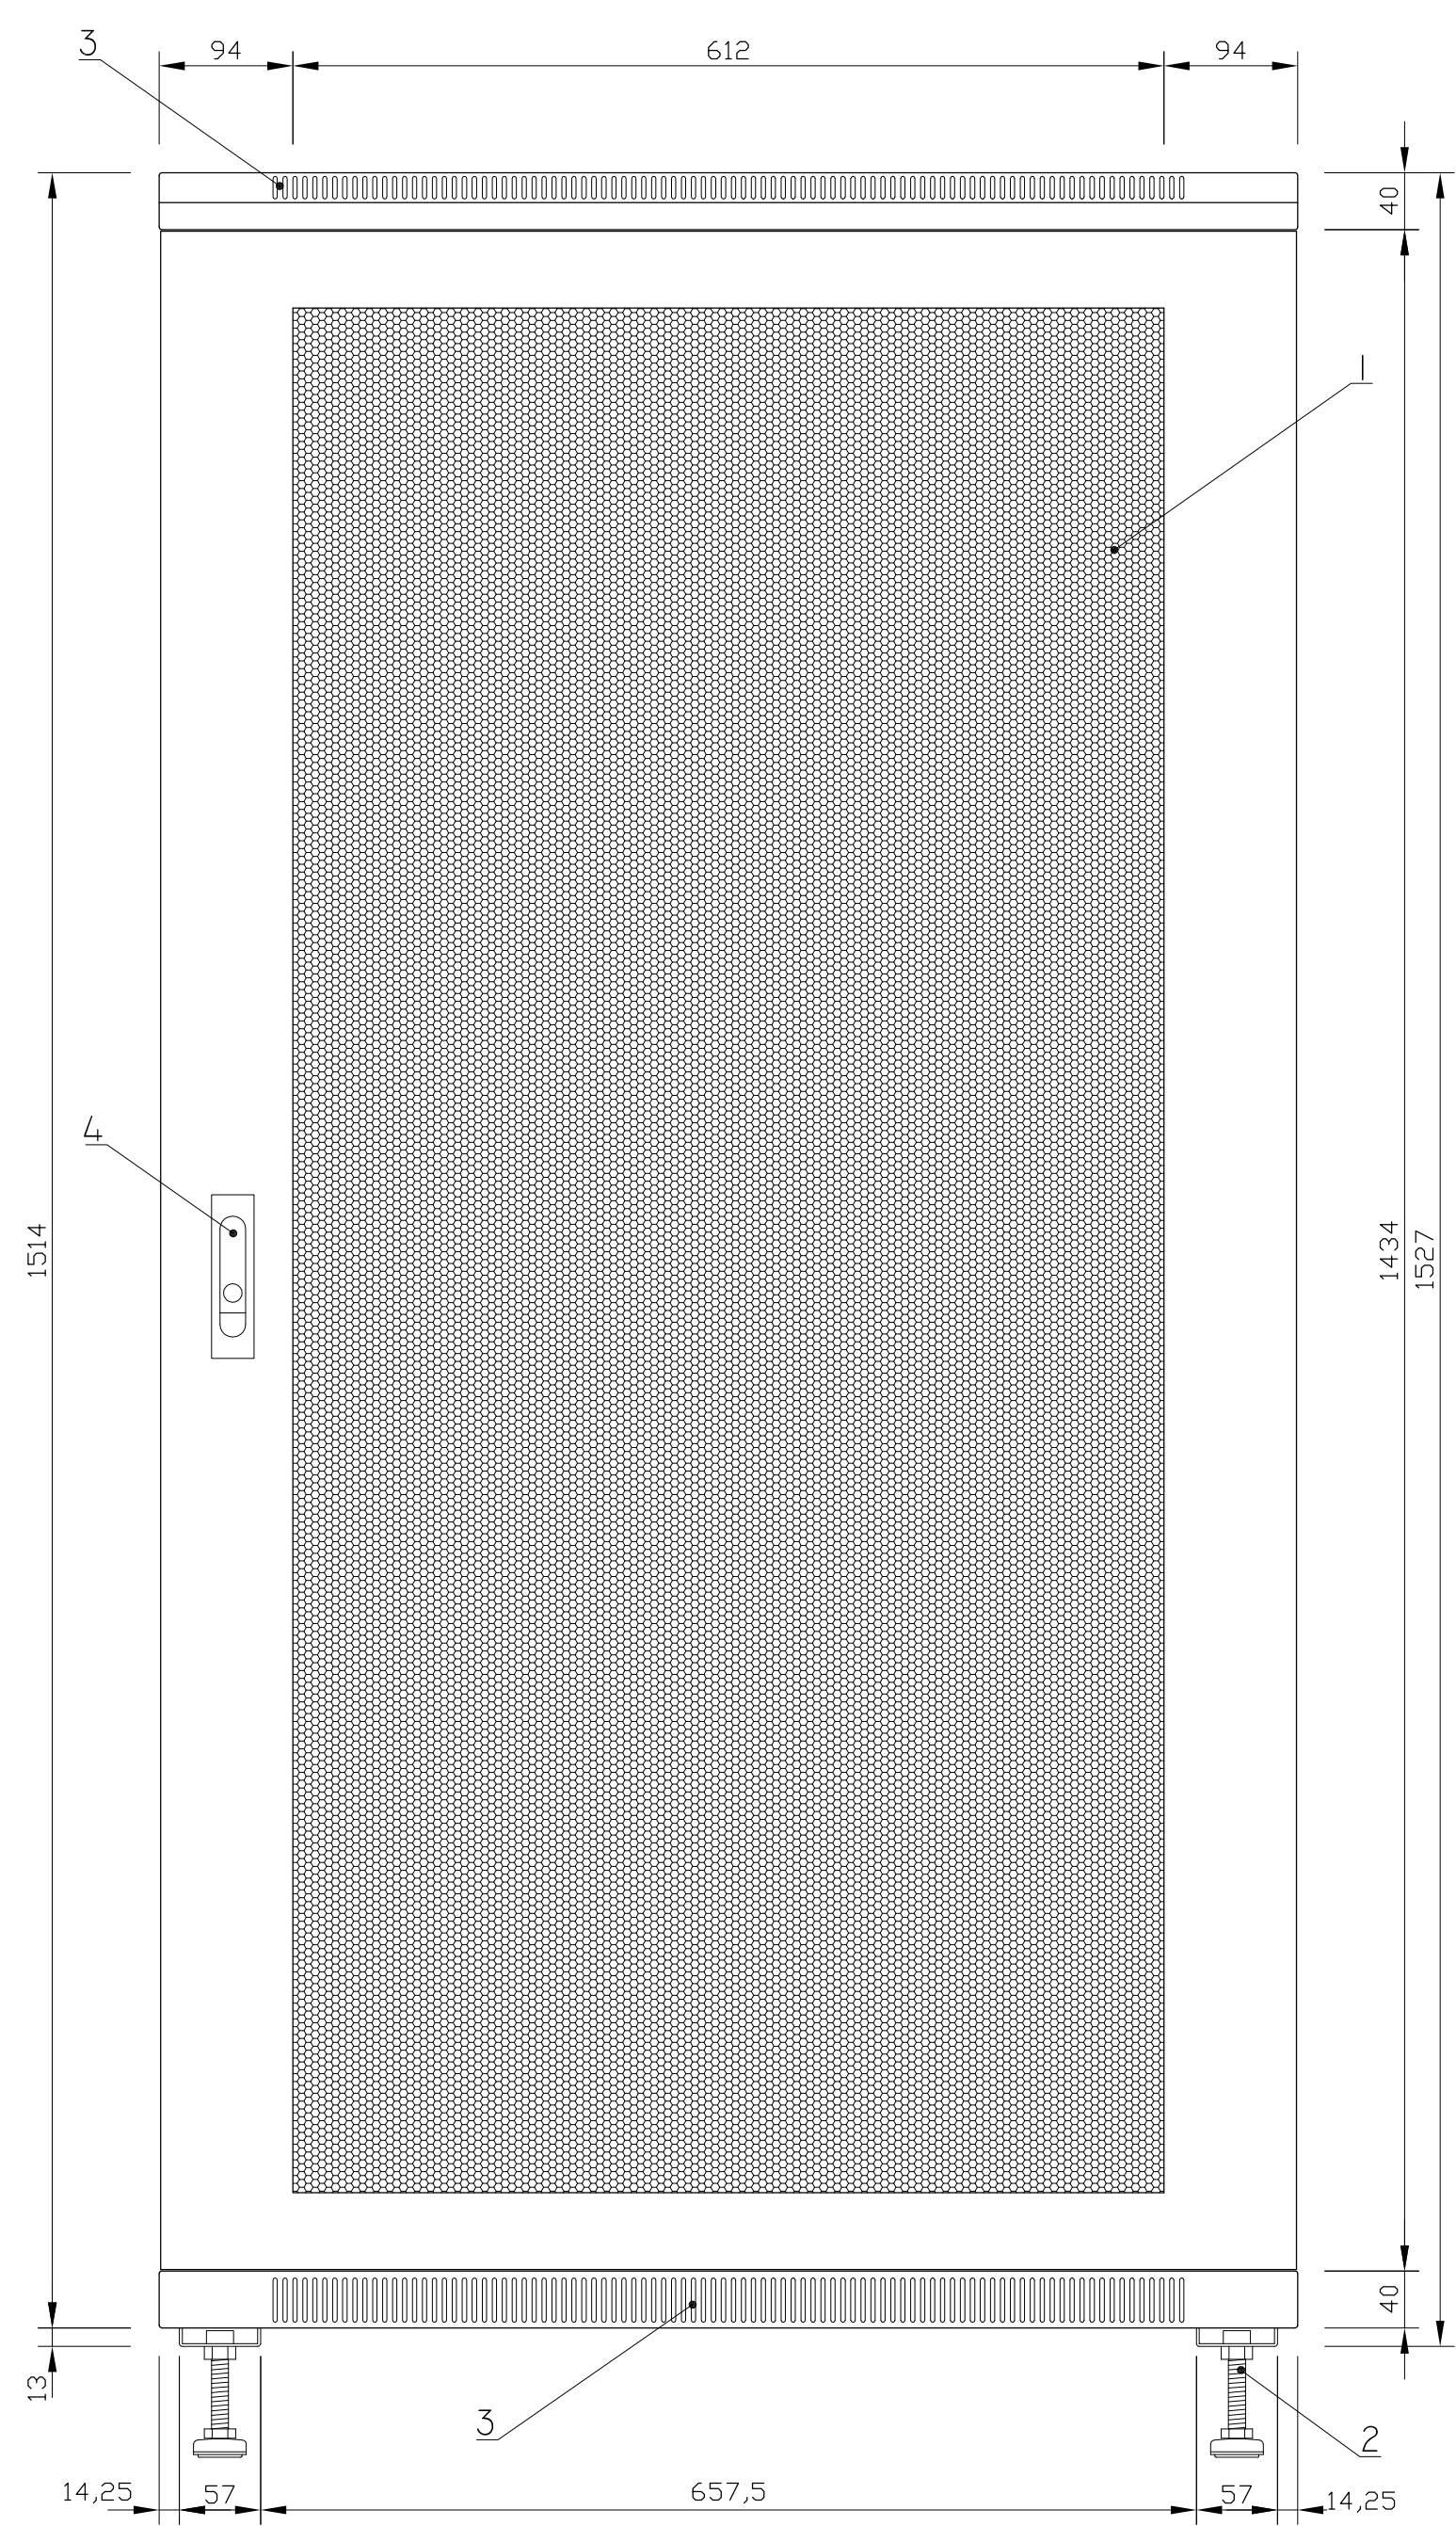

- 1. PERFORATED FRONT DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. FRONT DOOR LOCK INSTALLATION SPACE

FRONT ELEVATION


019-320-88-112

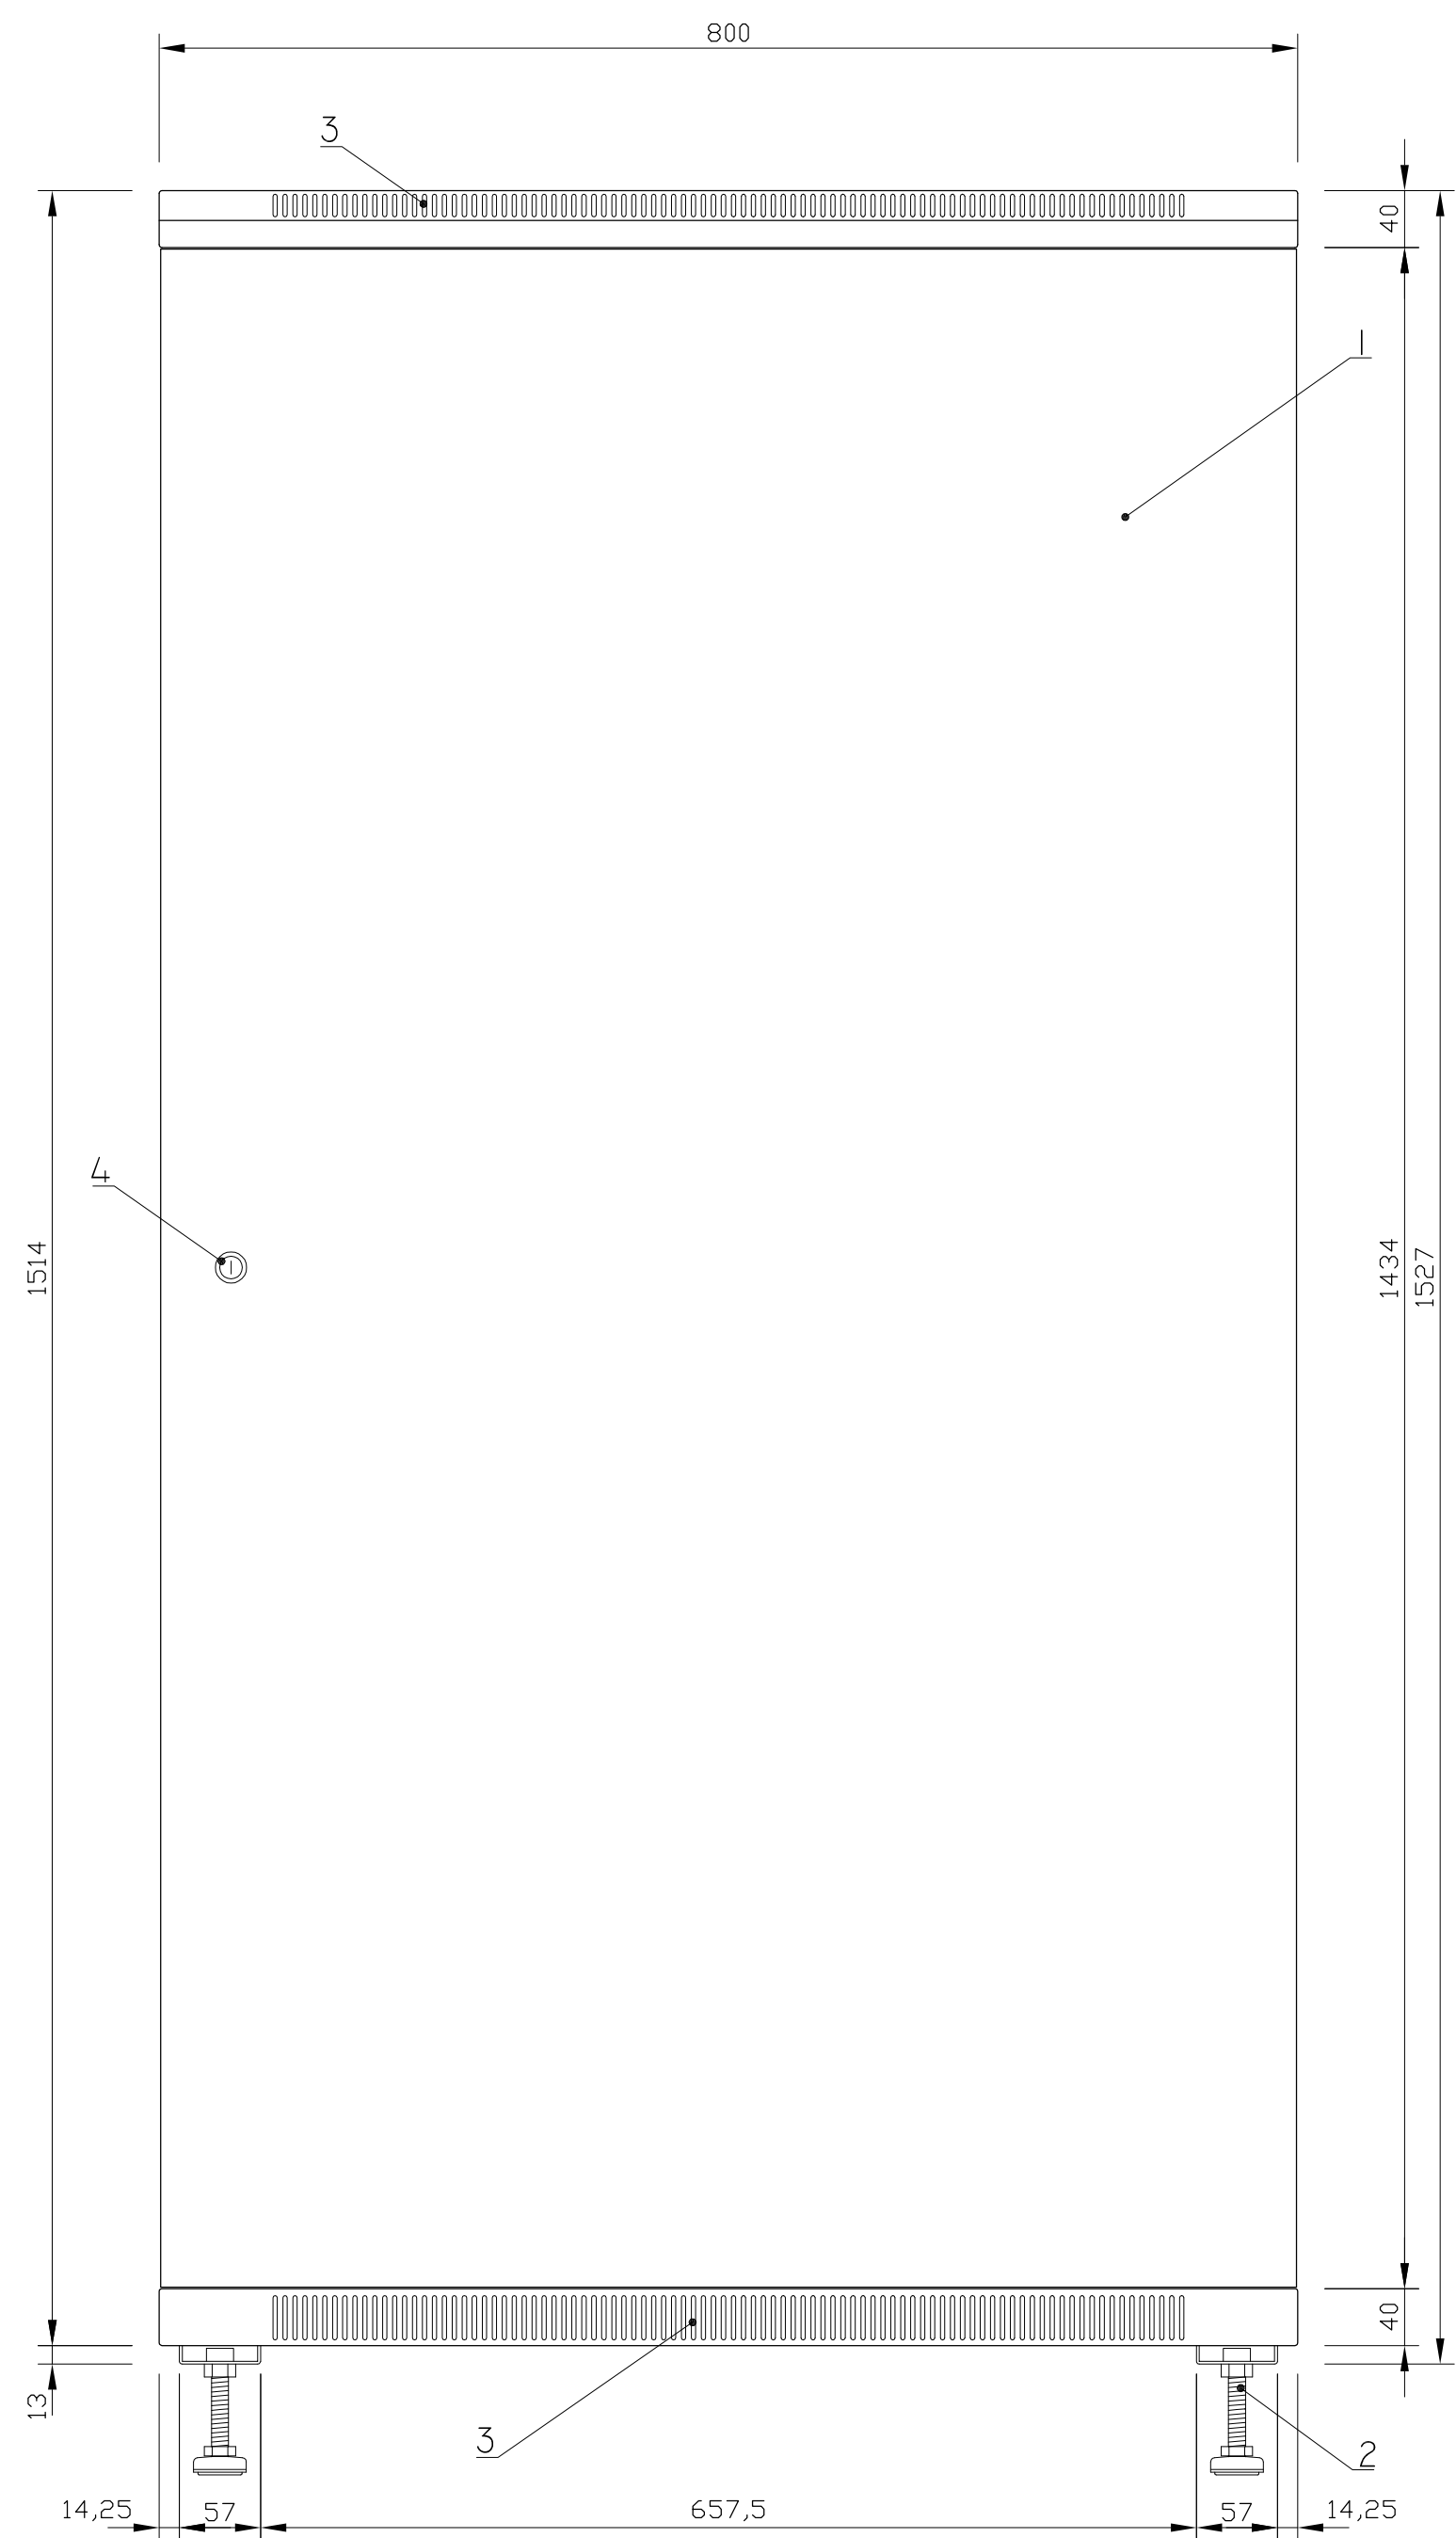

- 1. STEEL REAR DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. REAR DOOR LOCK INSTALLATION SPACE

REAR ELEVATION


019-320-88-112

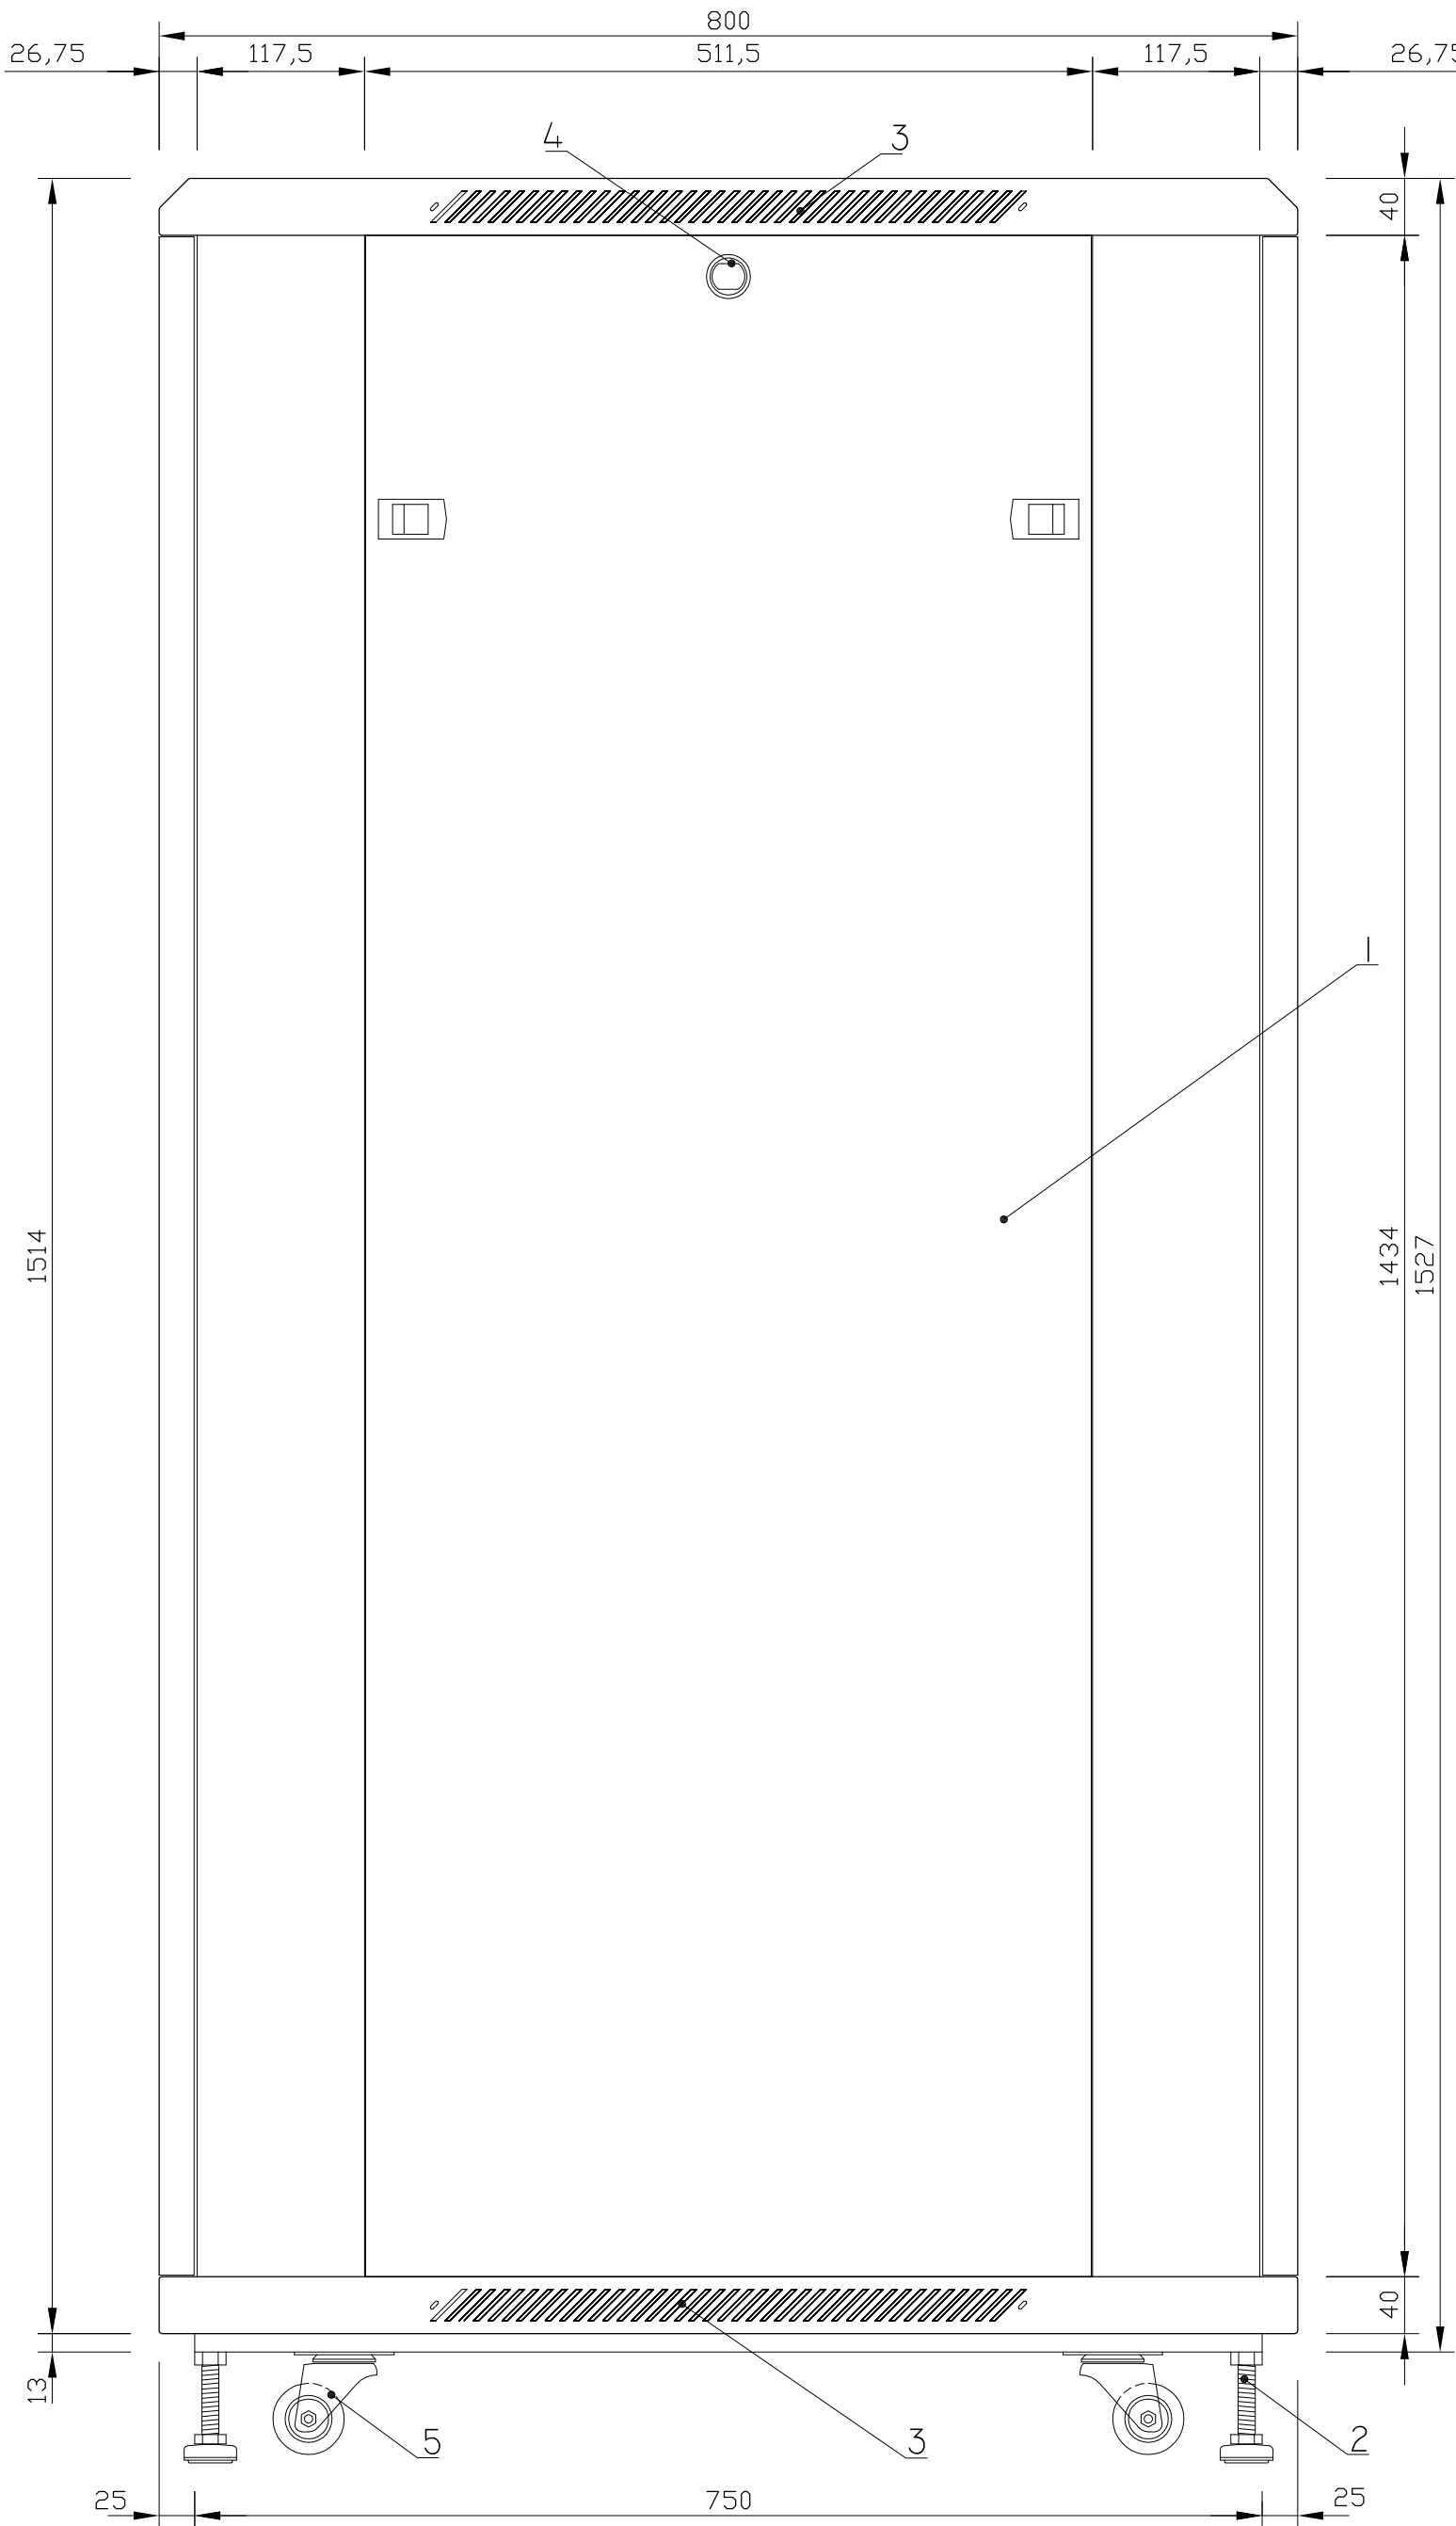

- 1. SIDE PANEL
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. SIDE PANEL LOCK INSTALLATION SPACE
- 5. 2" CASTOR WHEELS

SIDE ELEVATION

019-320-88-112

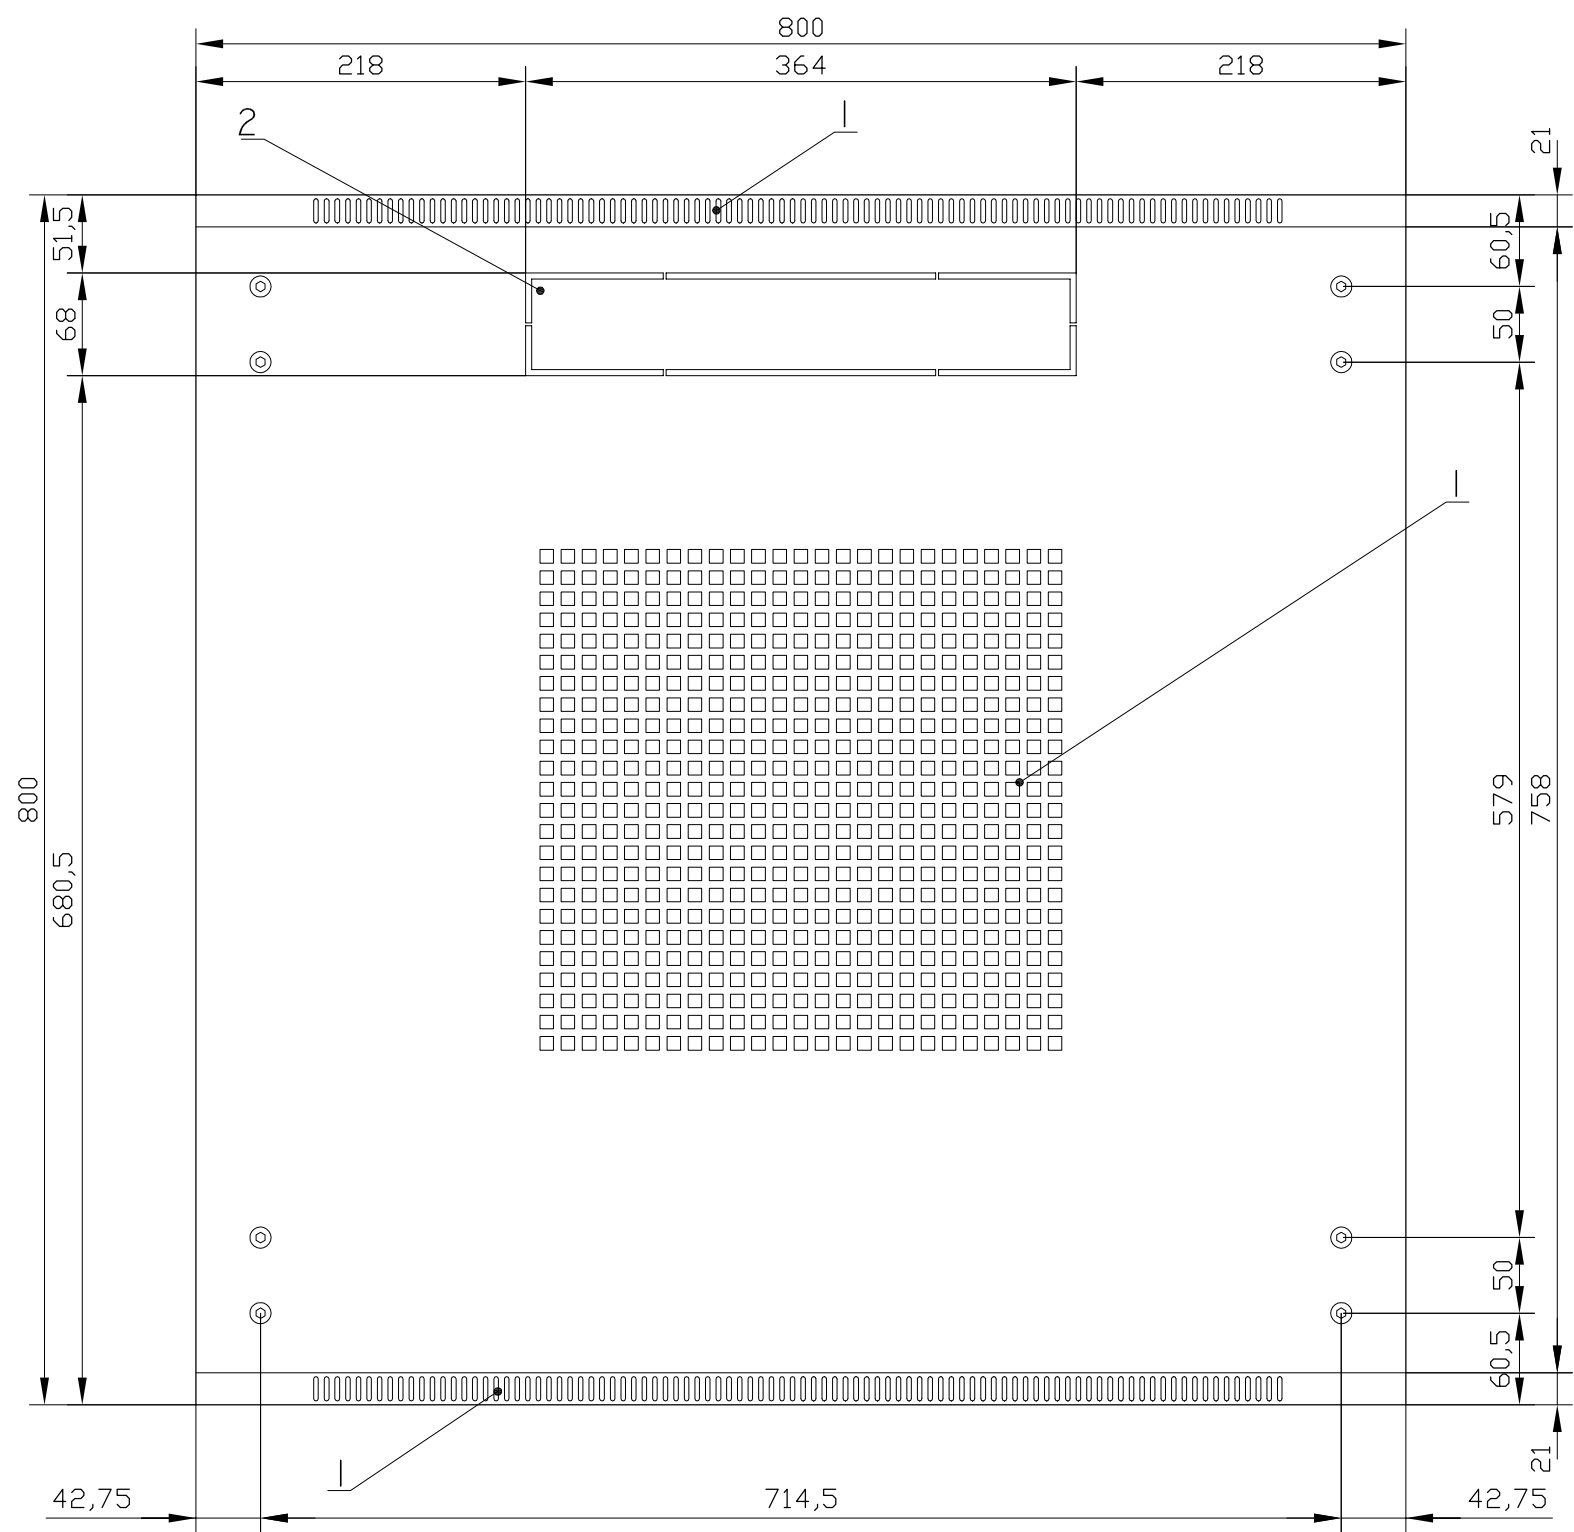

- 1. VENTILATION HOLES
- 2. TOP BACK CABLE ENTRY

TOP ELEVATION