




# 019-320-610-011/012

Netrack standing server cabinet  
32U/600x1000mm - glass door

019-320-610-011/012

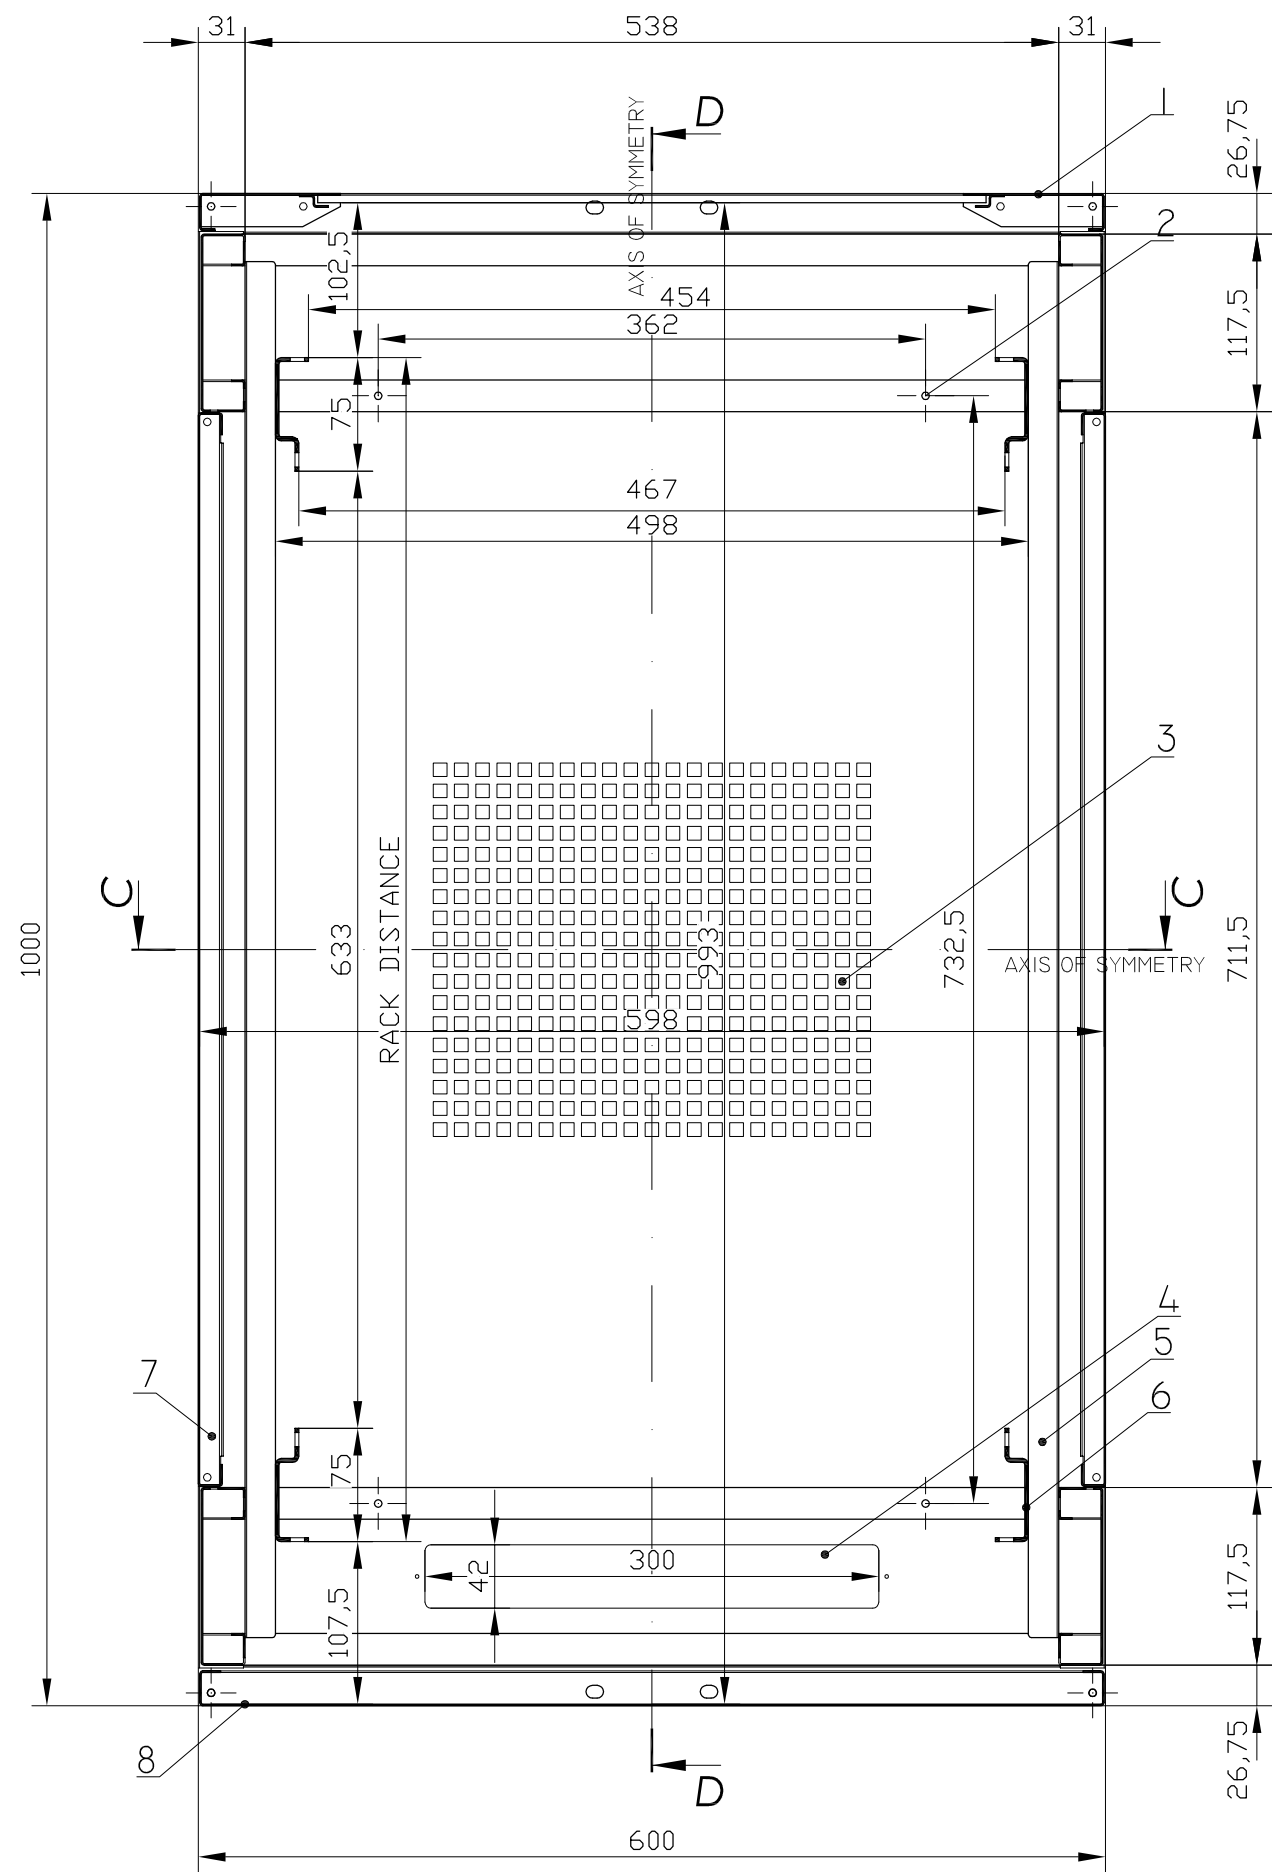

- 1. GLASS FRONT DOOR
- 2. HOLE FOR FAN UNIT INSTALLATION
- 3. VENTILATION HOLES
- 4. TOP BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR


RACK DISTANCES

|                  |       |
|------------------|-------|
| NETRACK STANDARD | 783MM |
| MAXIMUM          | 927MM |
| MINIMUM          | 167MM |

SECTION A-A  
- TOP COVER VIEW




019-320-610-011/012

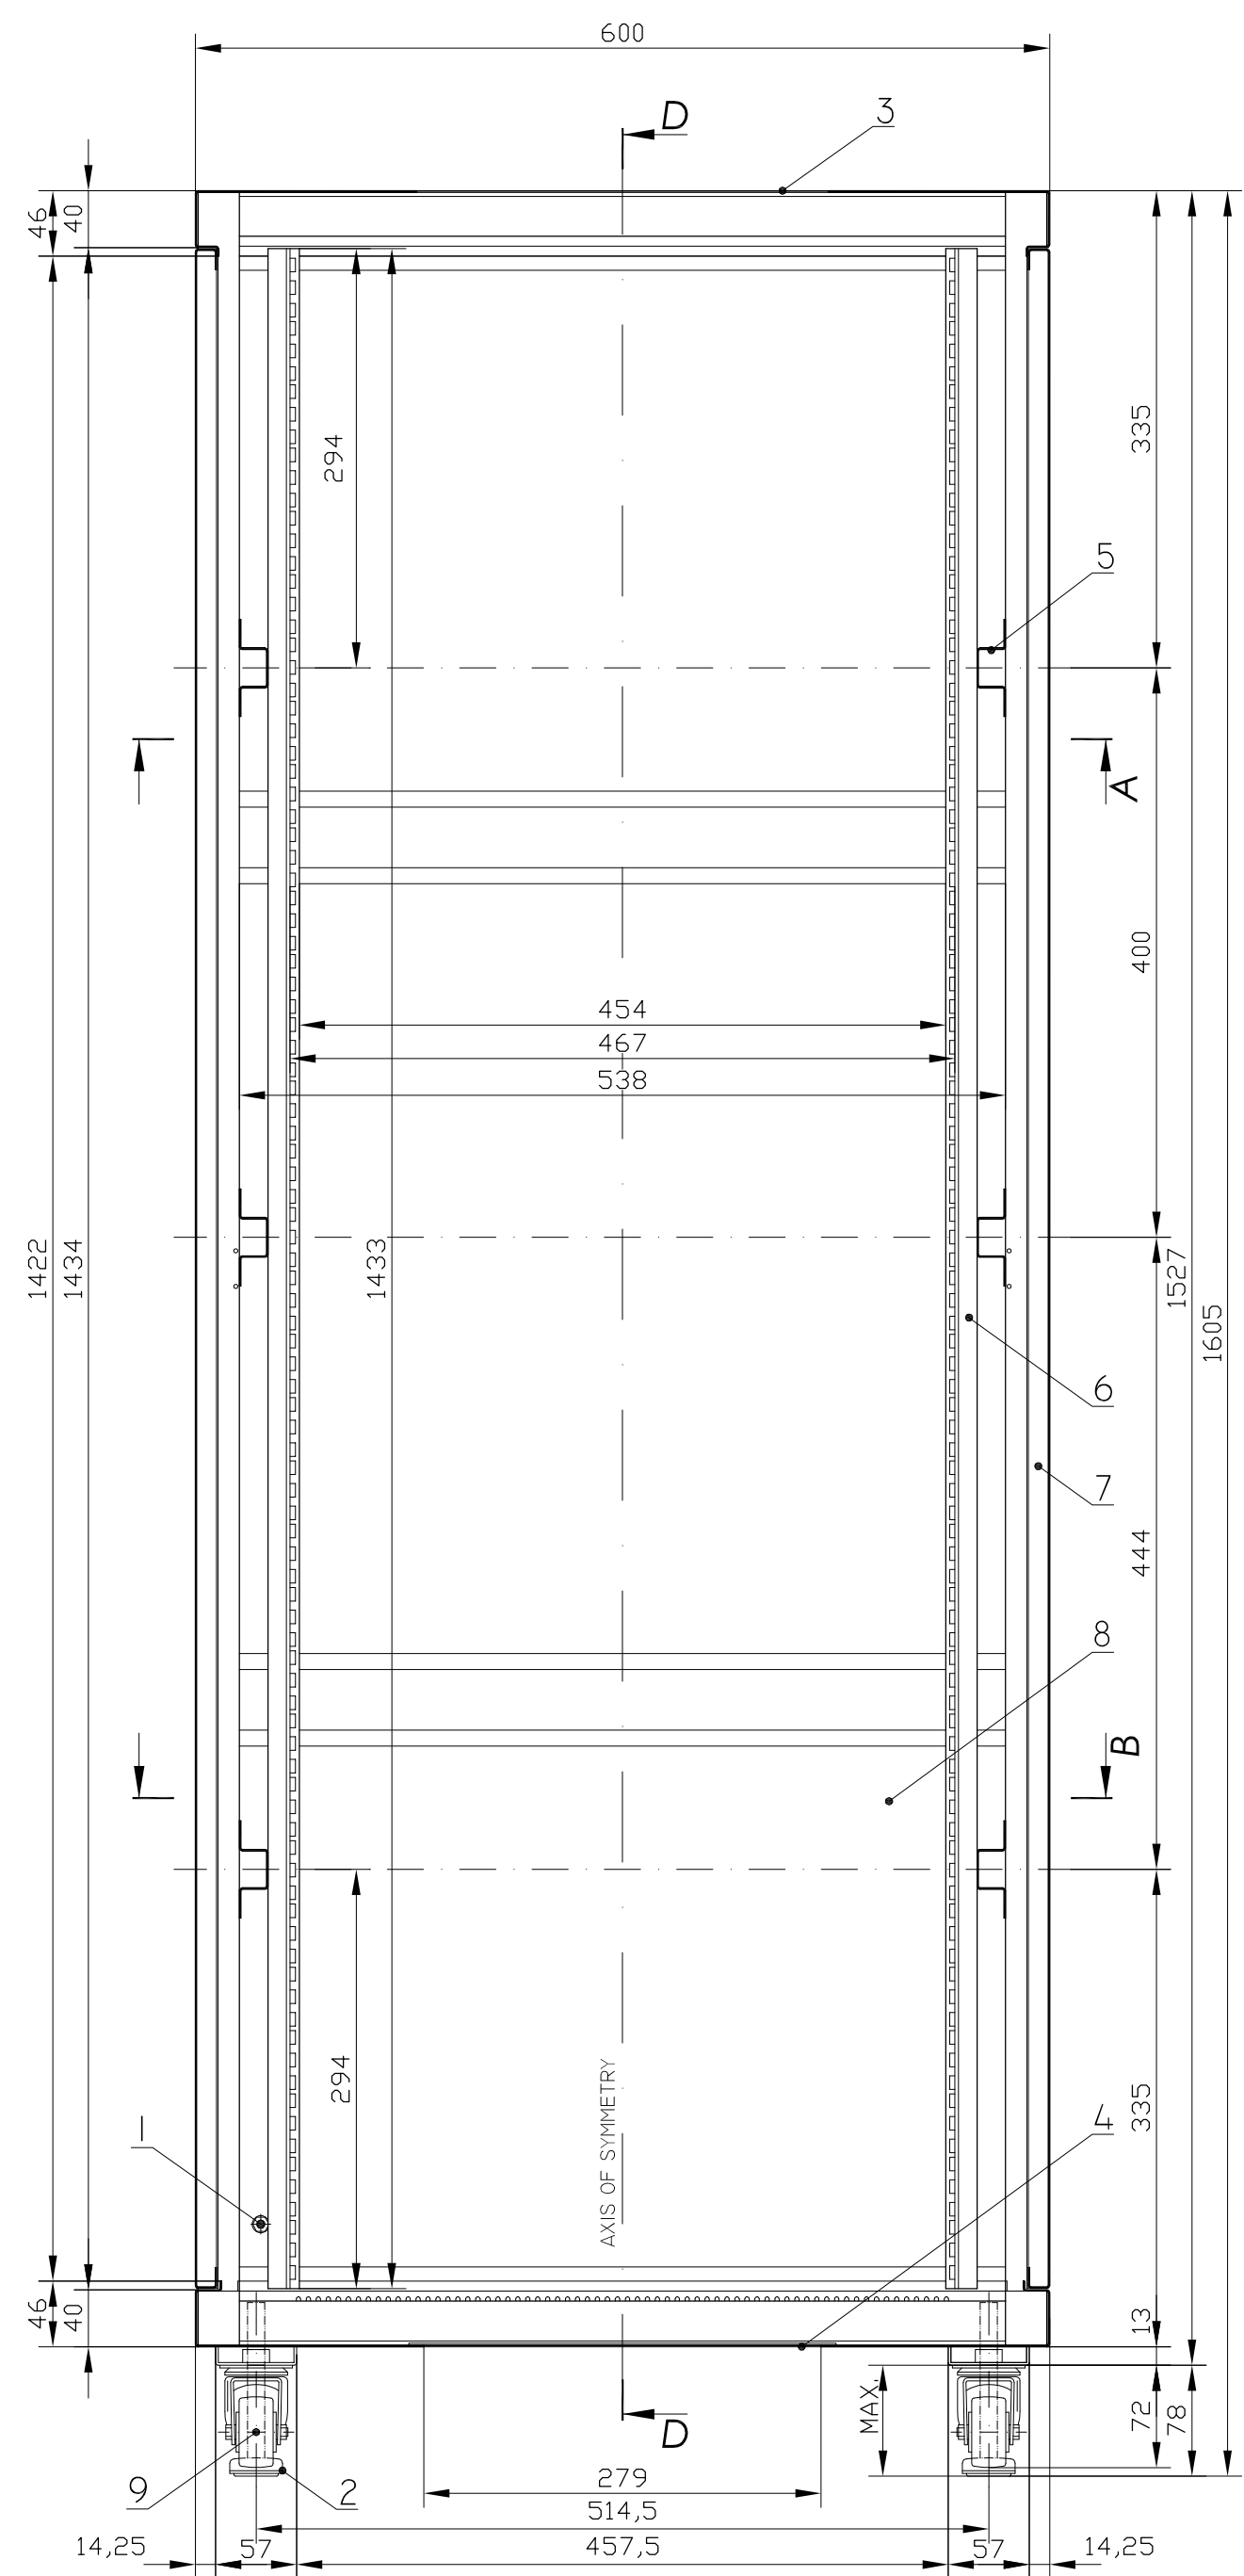

- 1. GROUND CONECTION BOLT IN THE DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. BOTTOM CENTRAL CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. 2" CASTOR WHEELS

SECTION C-C

019-320-610-011/012

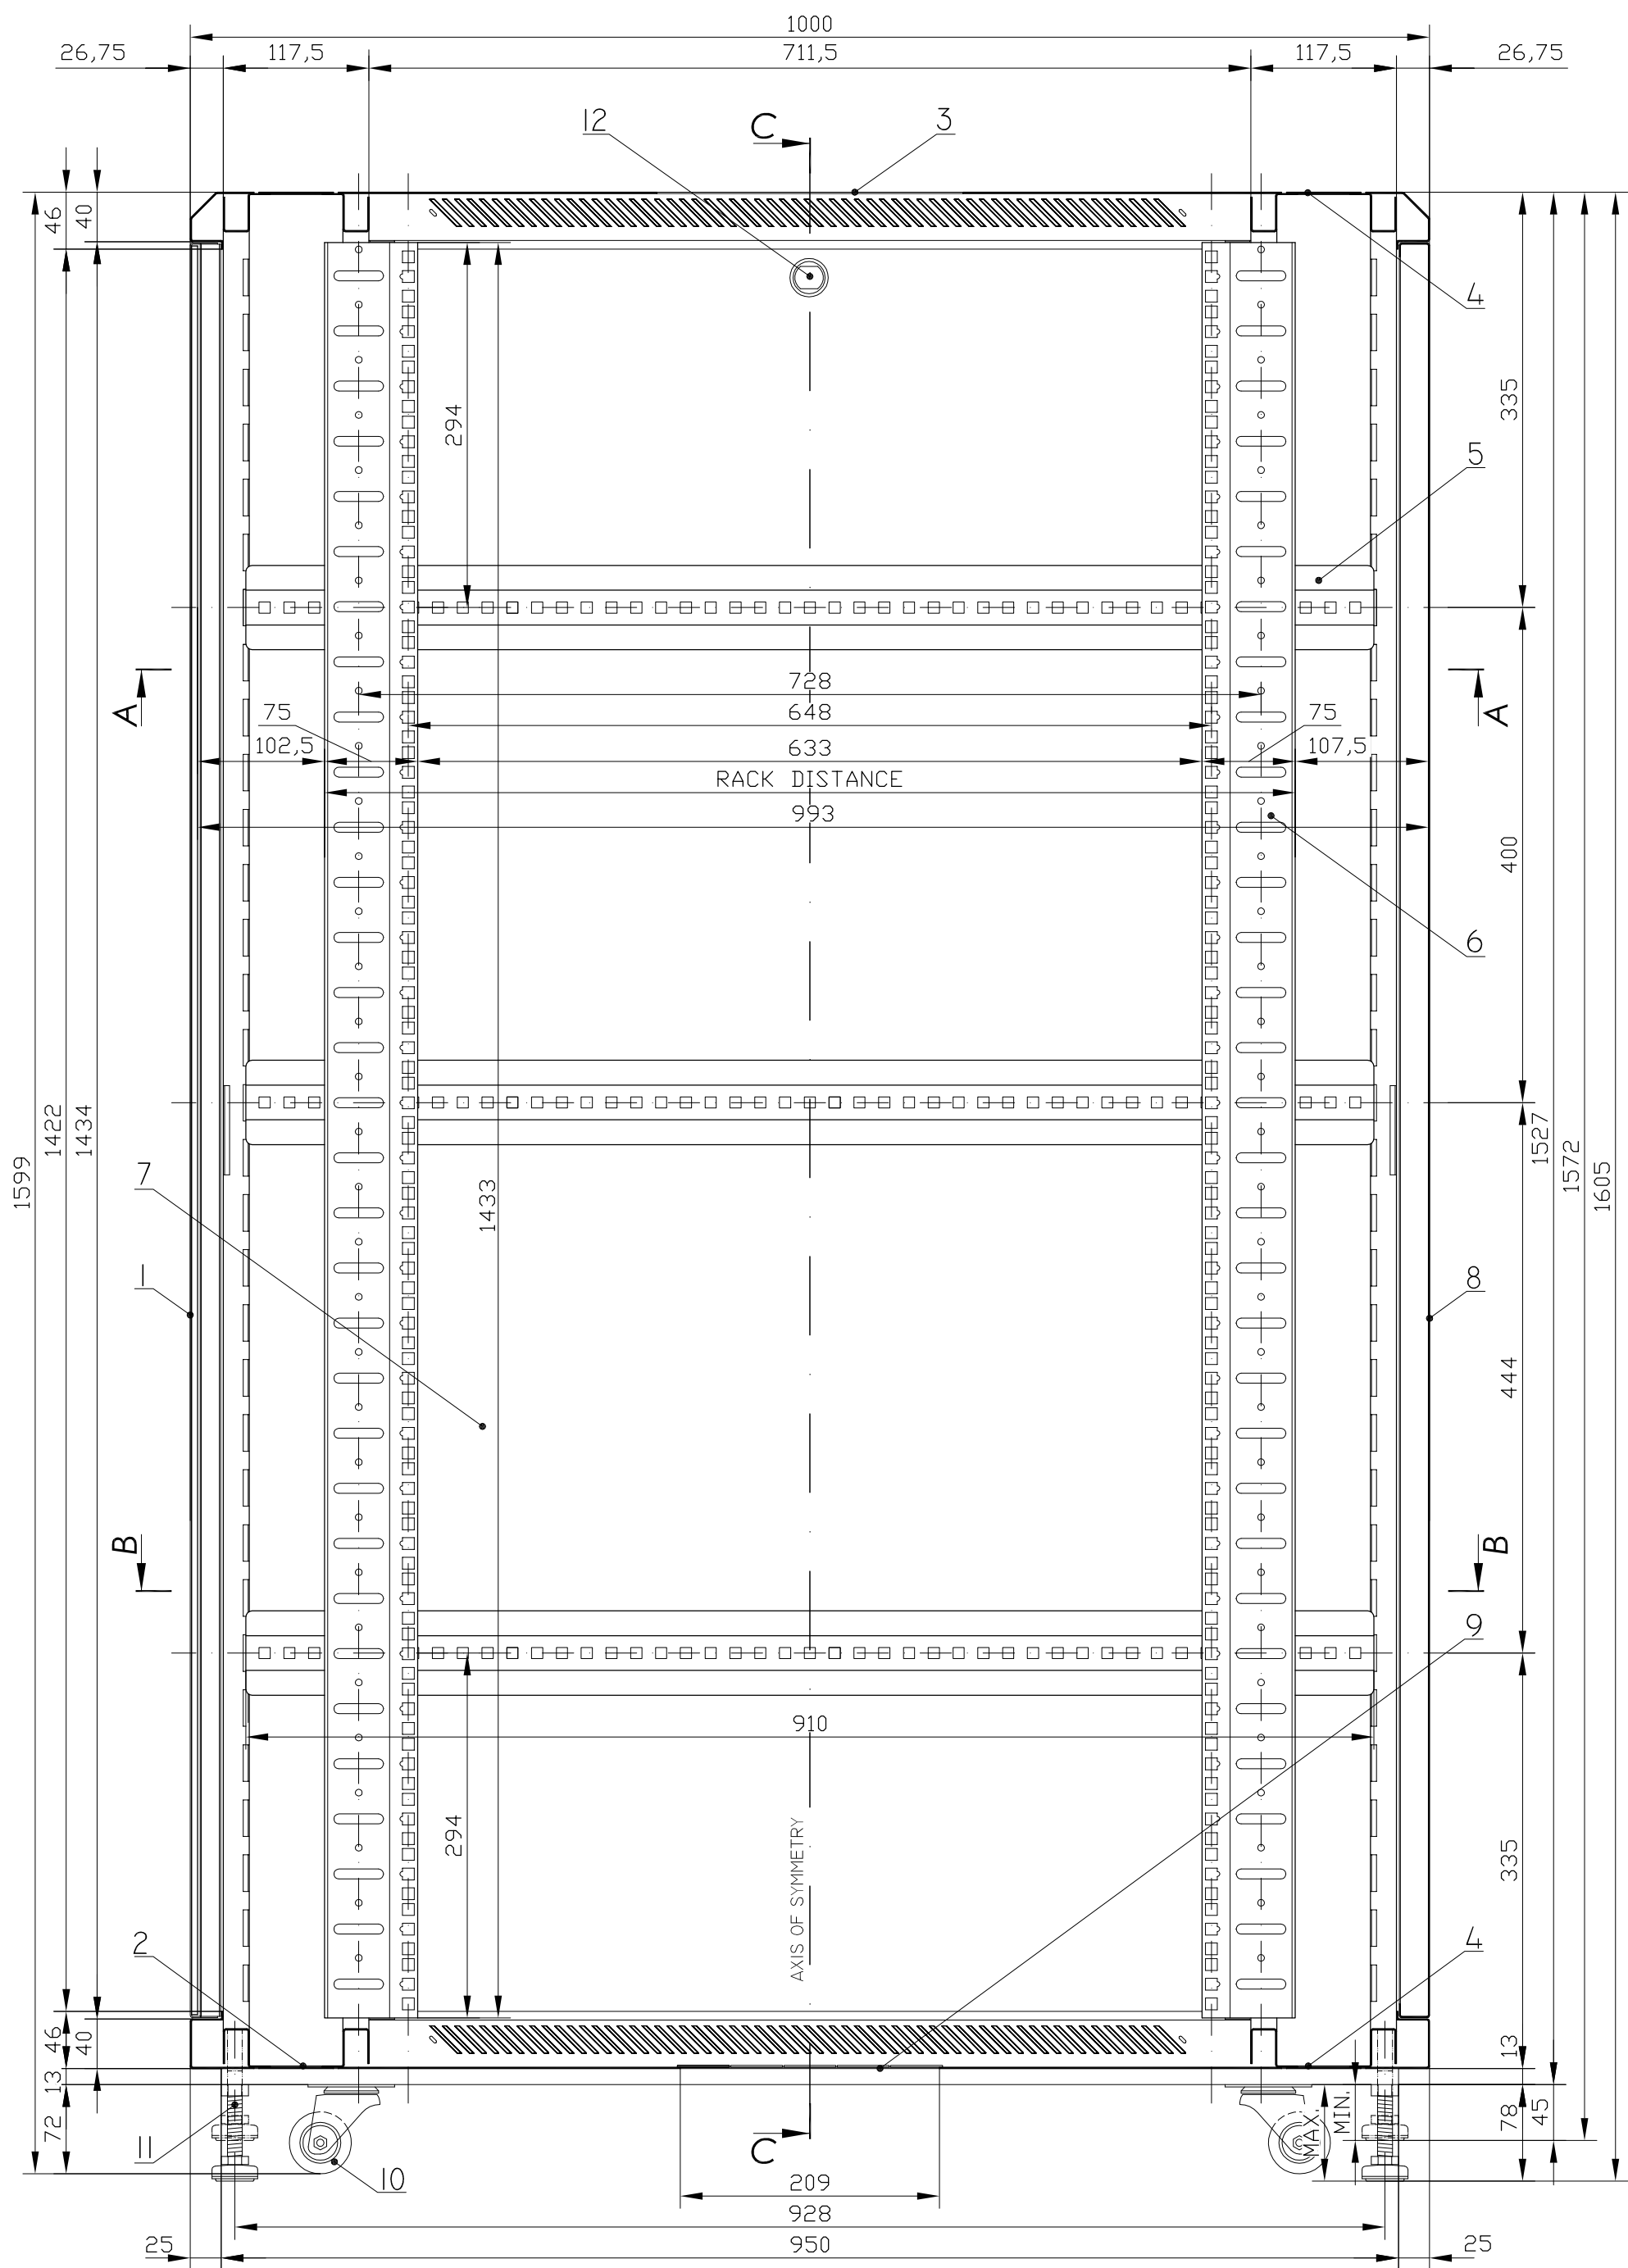


- 1. GLASS FRONT DOOR
- 2. BOTTOM FRONT CABLE ENTRY
- 3. VENTILATION HOLES
- 4. TOP/BOTTOM BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. BOTTOM CENTRAL CABLE ENTRY
- 10. 2" CASTOR WHEELS
- 11. ADJUSTABLE FEET
- 12.SIDE PANEL LOCK INSTALLATION SPACE

RACK DISTANCES

|                  |       |
|------------------|-------|
| NETRACK STANDARD | 783MM |
| MAXIMUM          | 927MM |
| MINIMUM          | 167MM |

SECTION D-D


019-320-610-011/012

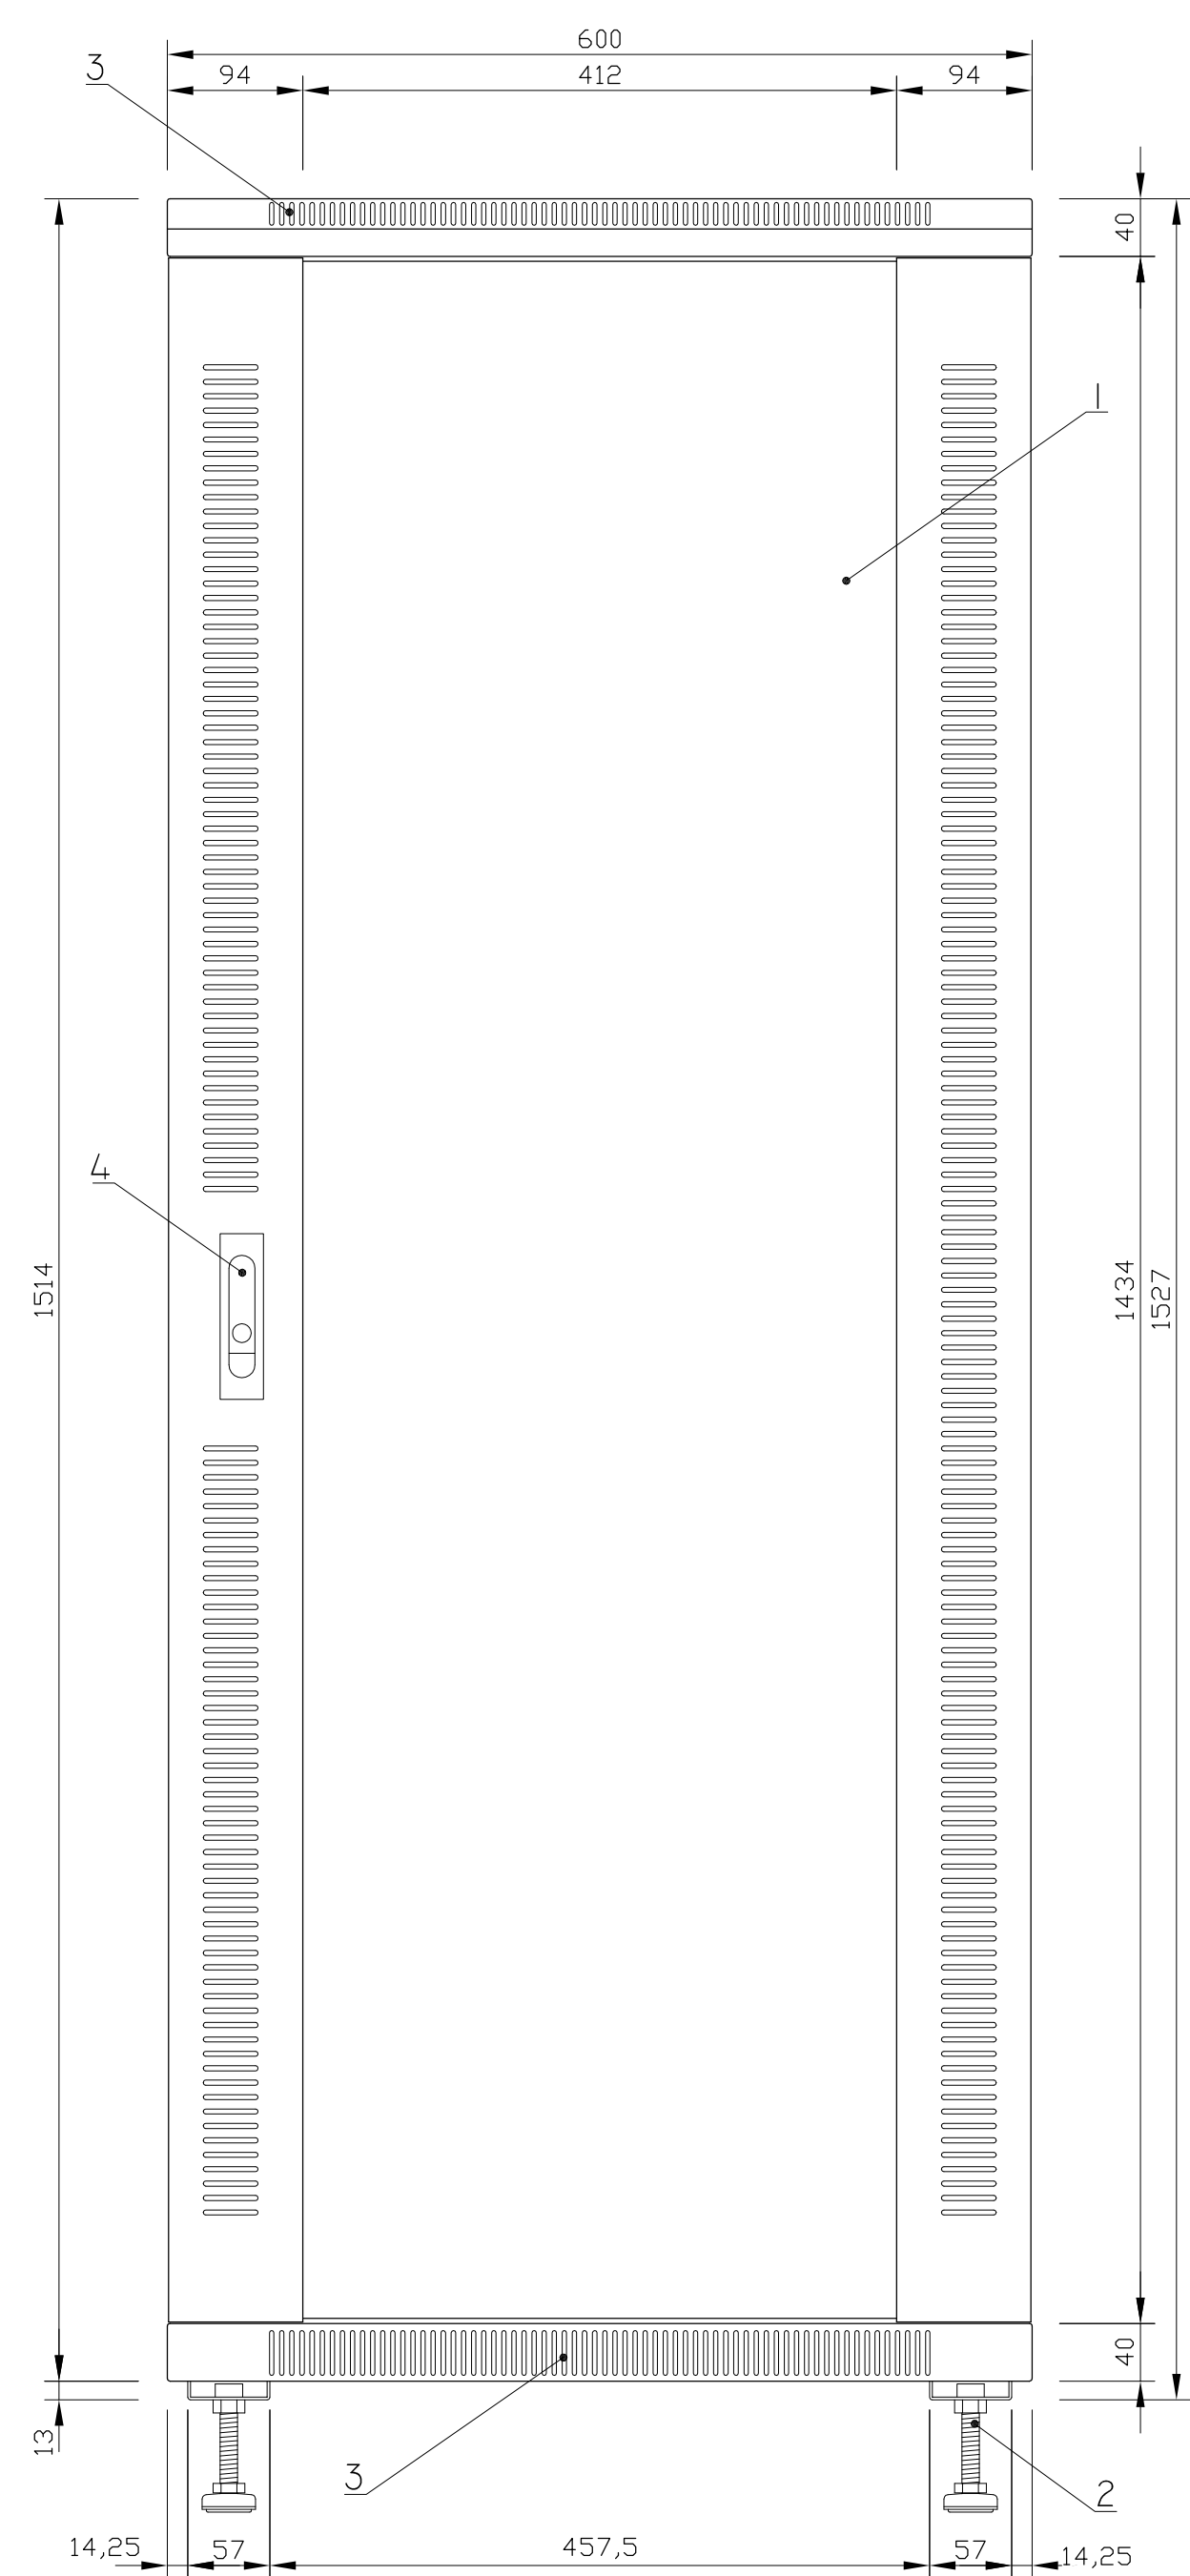

- 1. GLASS FRONT DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. FRONT DOOR LOCK INSTALLATION SPACE

FRONT ELEVATION


019-320-610-011/012

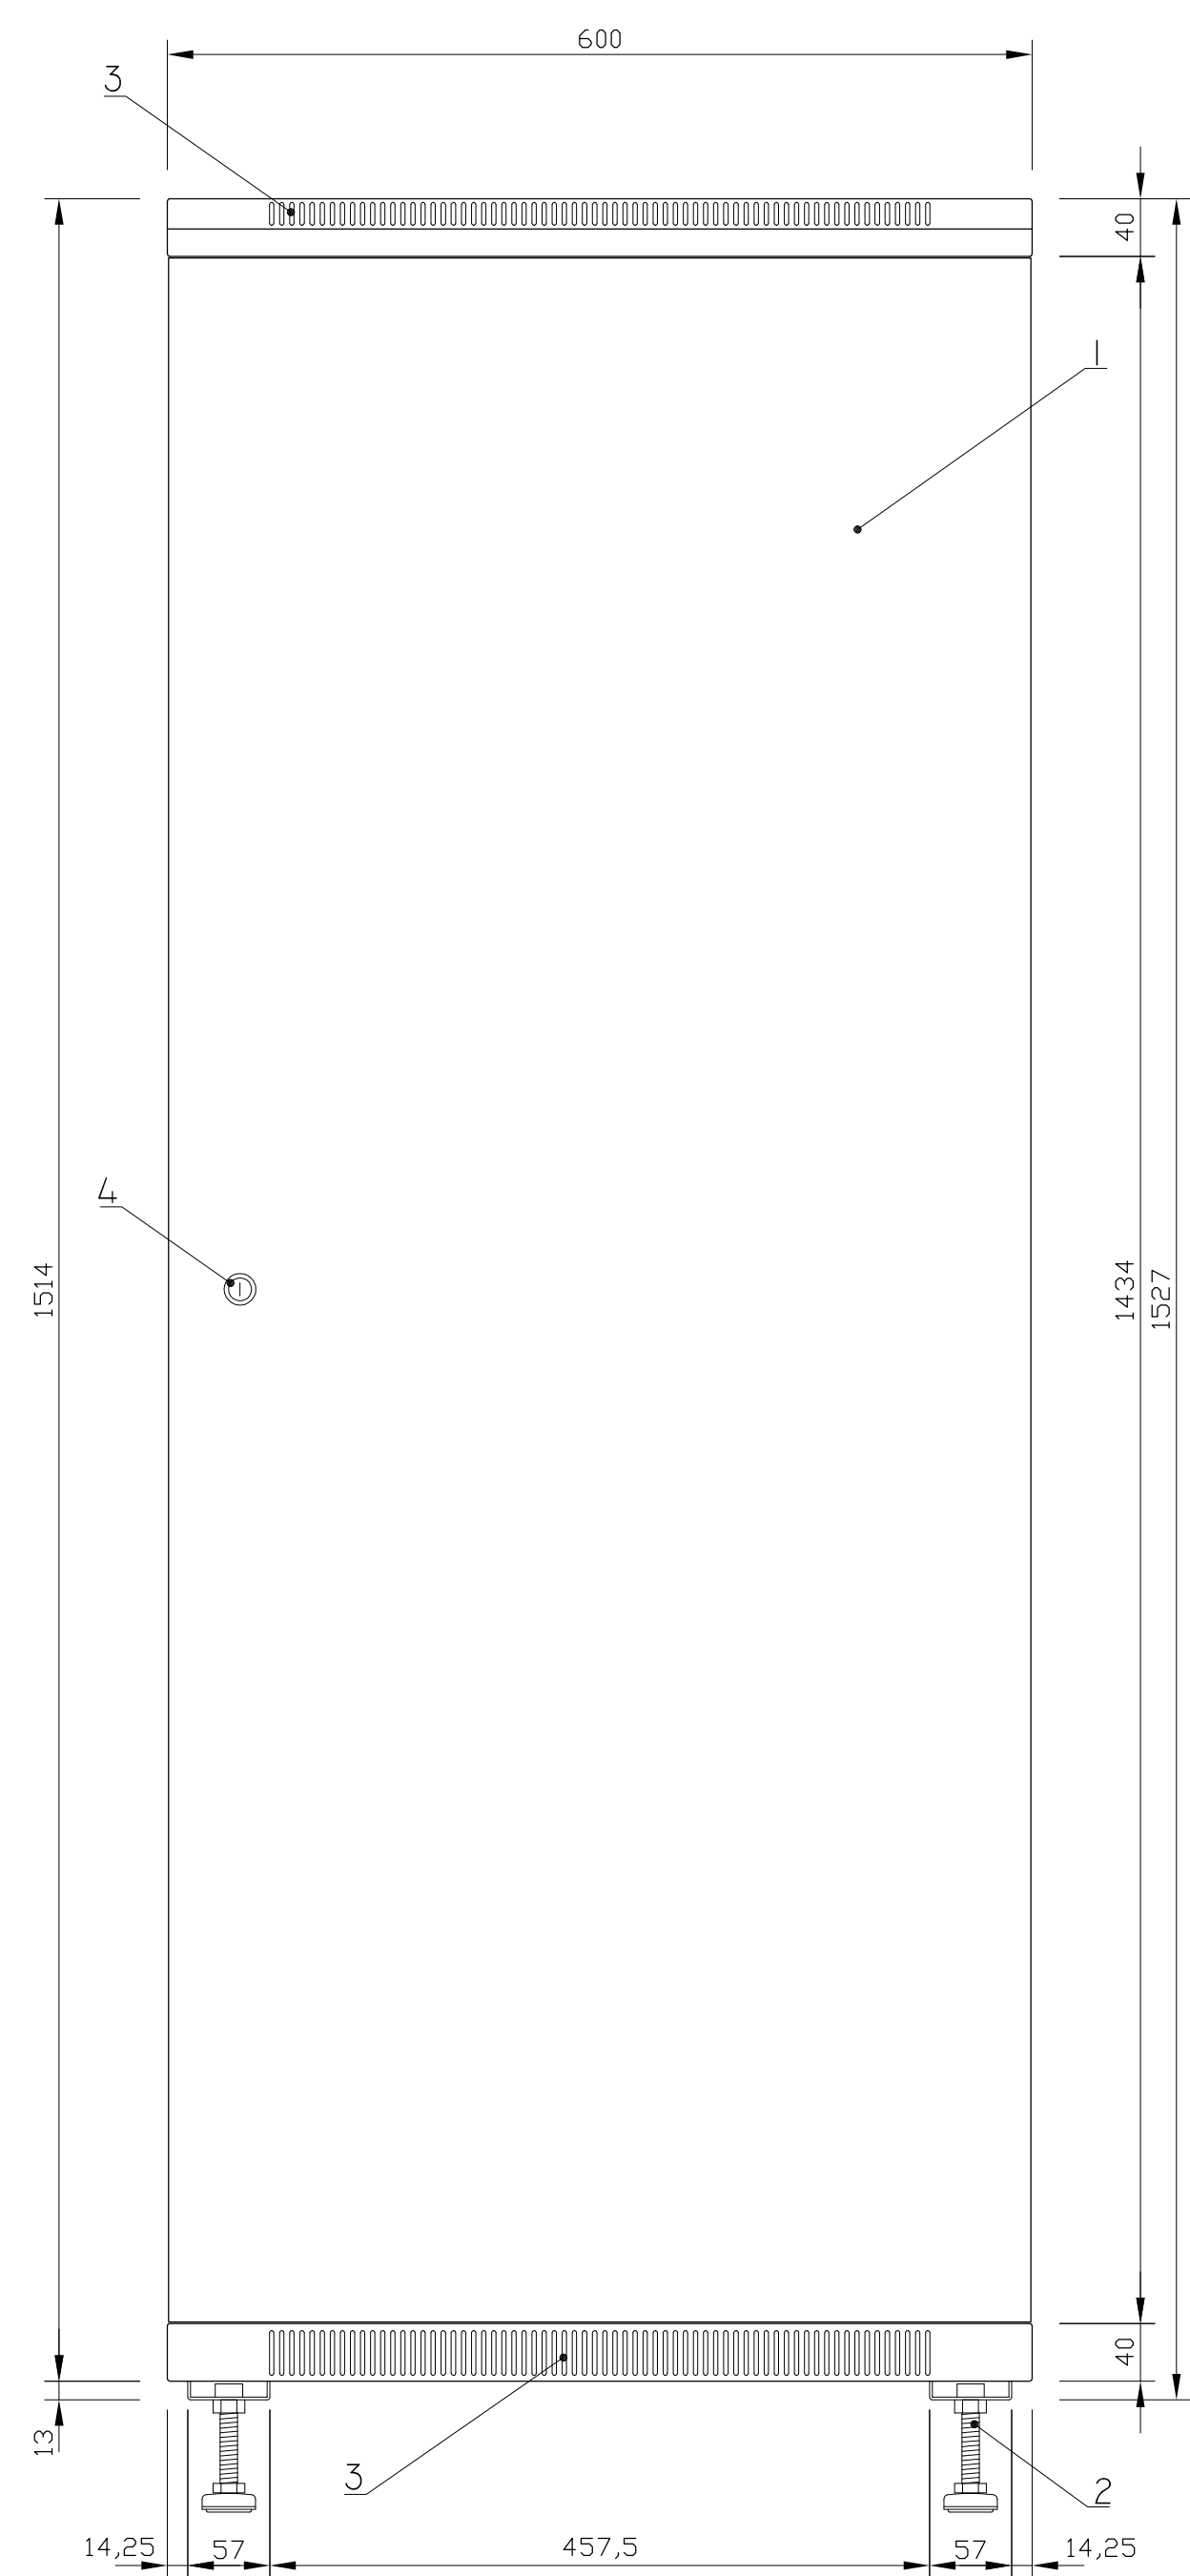

- 1. STEEL REAR DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. REAR DOOR LOCK INSTALLATION SPACE

REAR ELEVATION


019-320-610-011/012

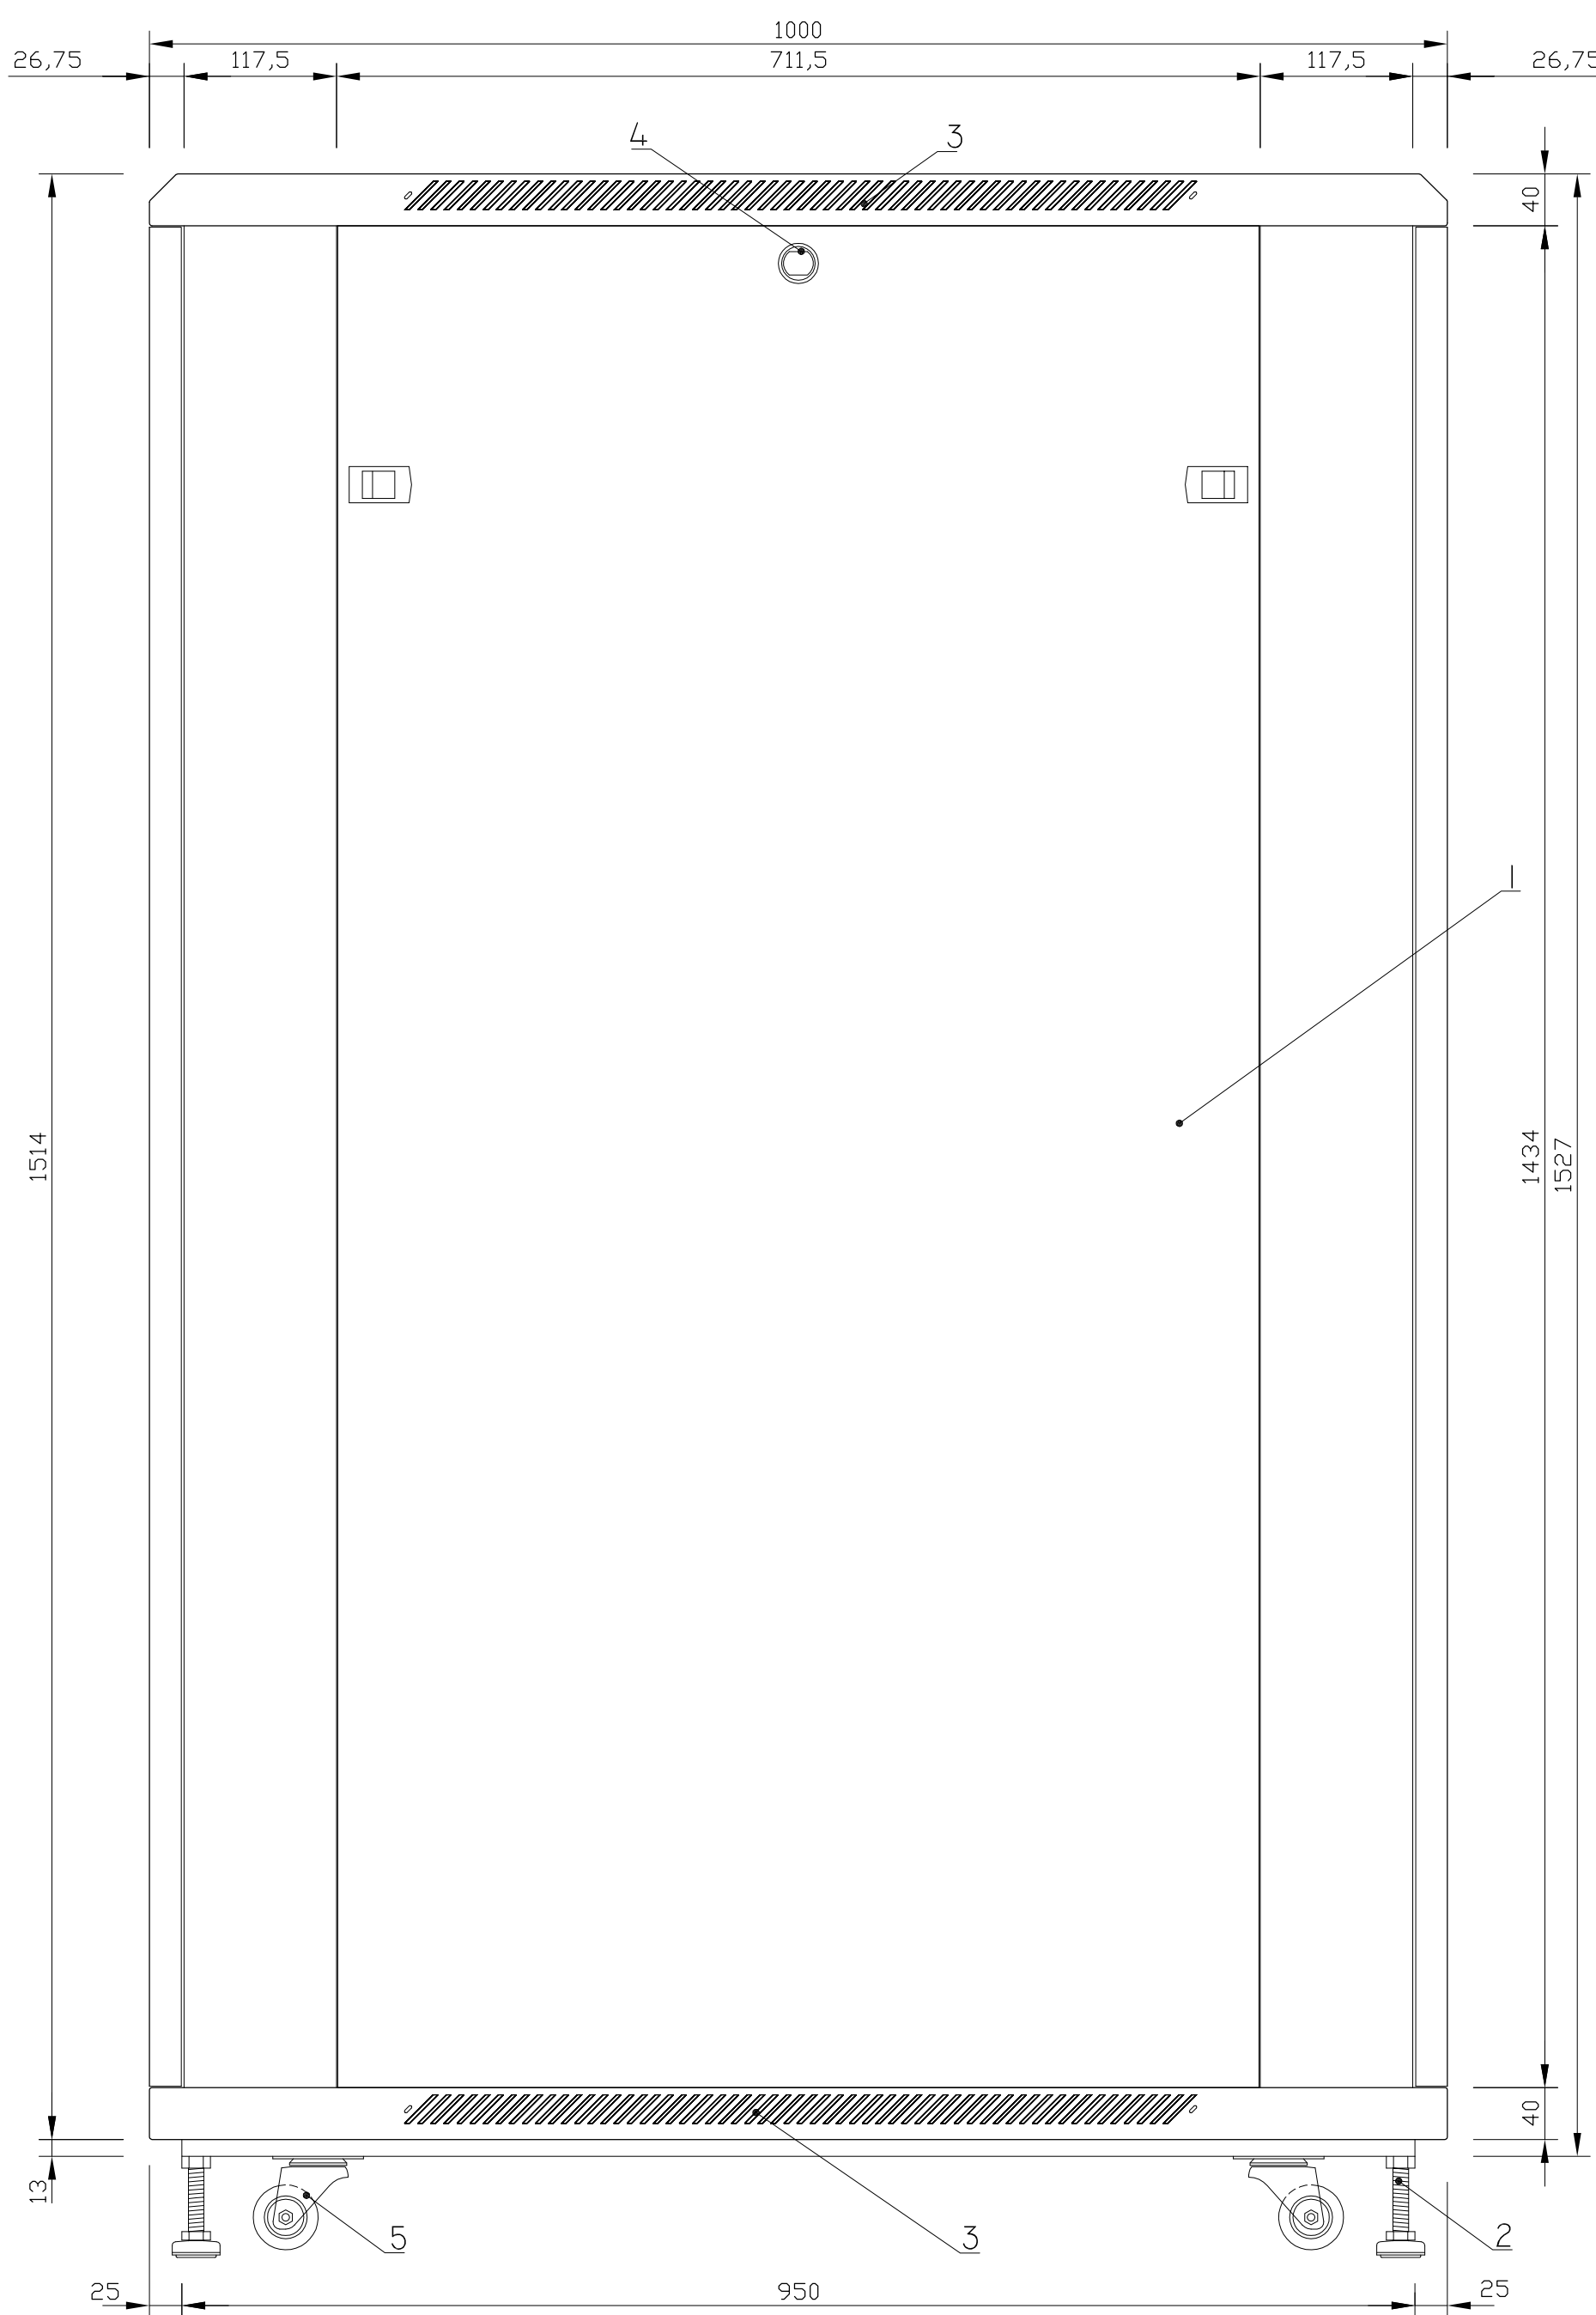

- 1. SIDE PANEL
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. SIDE PANEL LOCK INSTALLATION SPACE
- 5. 2" CASTOR WHEELS

# SIDE ELEVATION

019-320-610-011/012

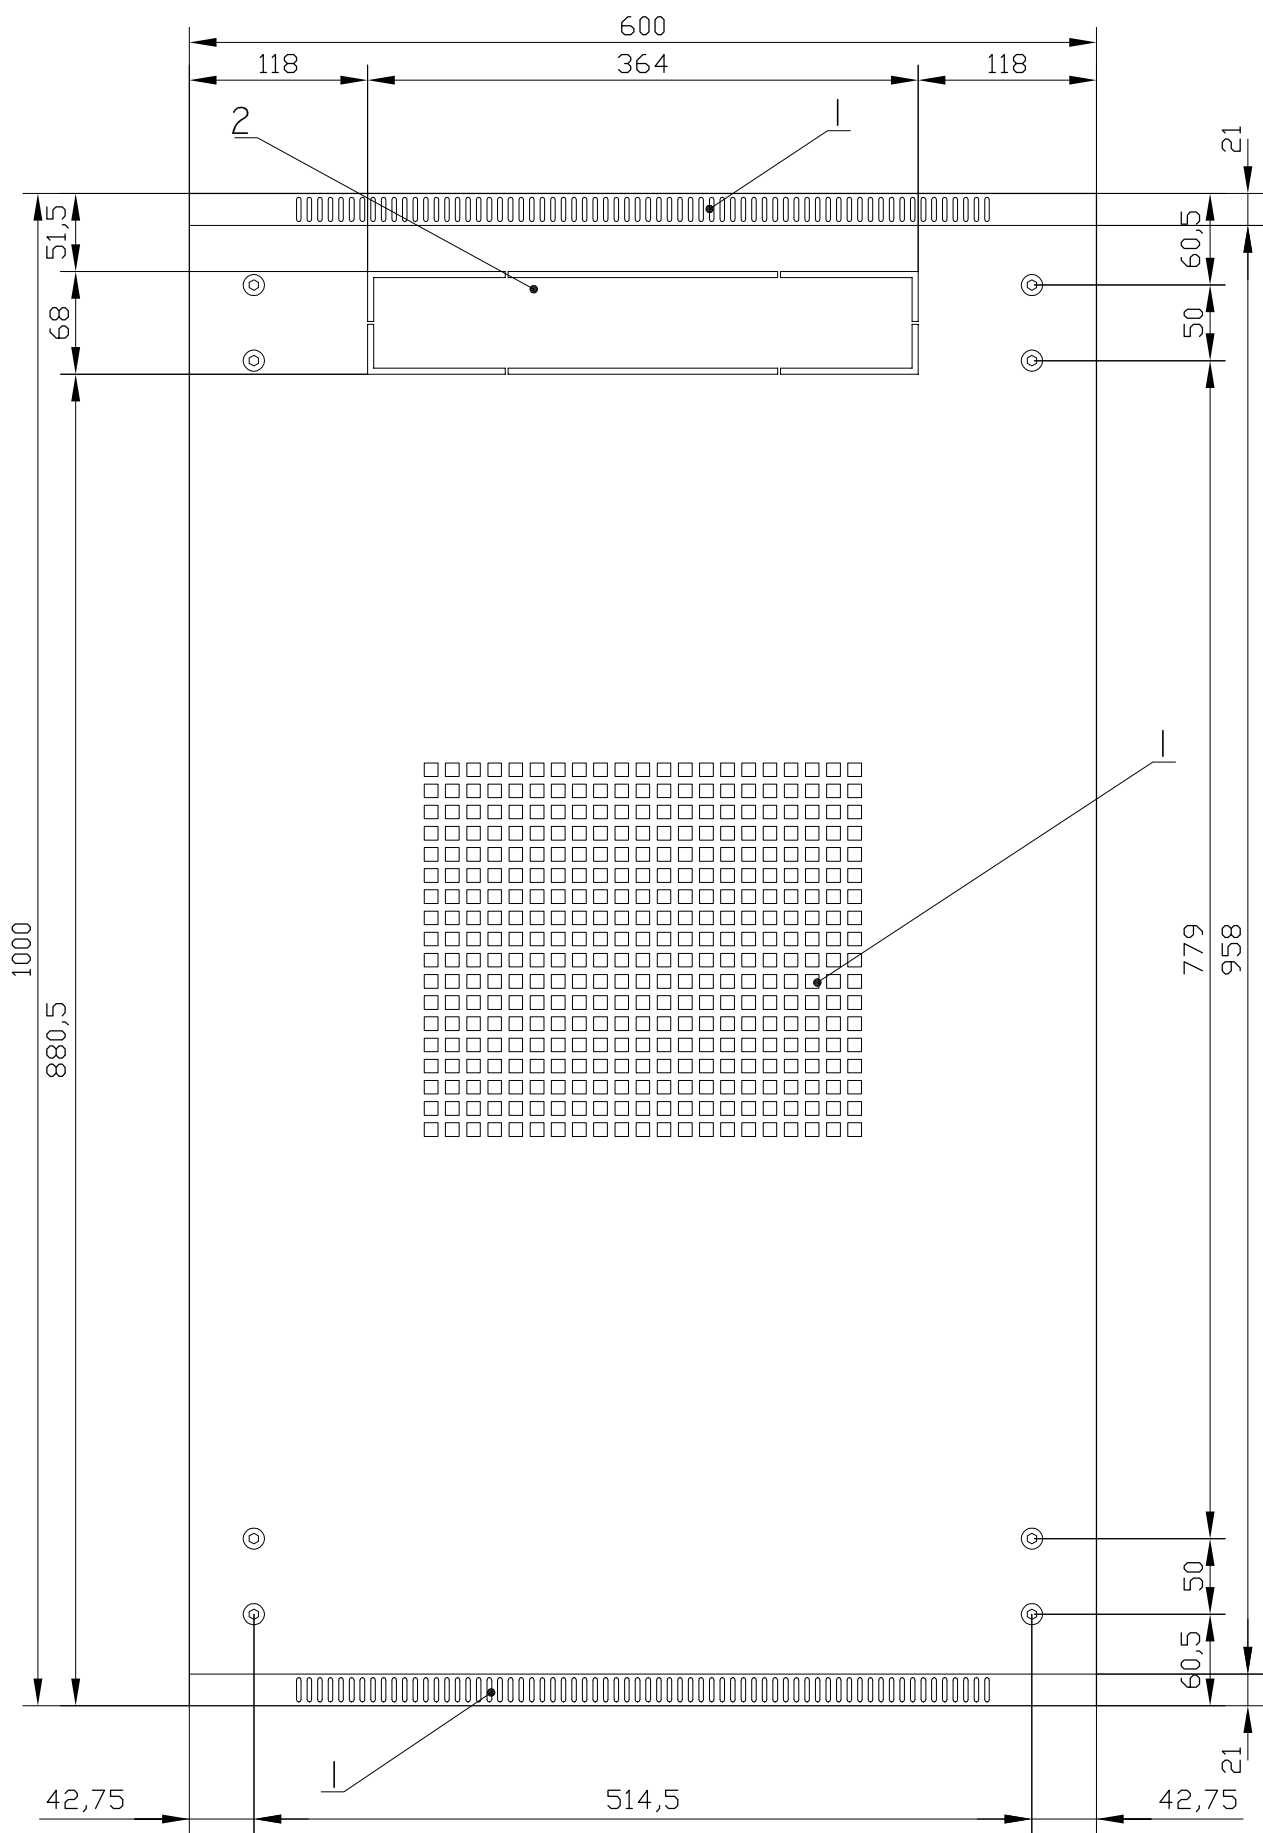

- 1. VENTILATION HOLES
- 2. TOP BACK CABLE ENTRY

TOP ELEVATION