




019-420-812-112

Netrack standing server cabinet
42U/800x1200mm - perforated door

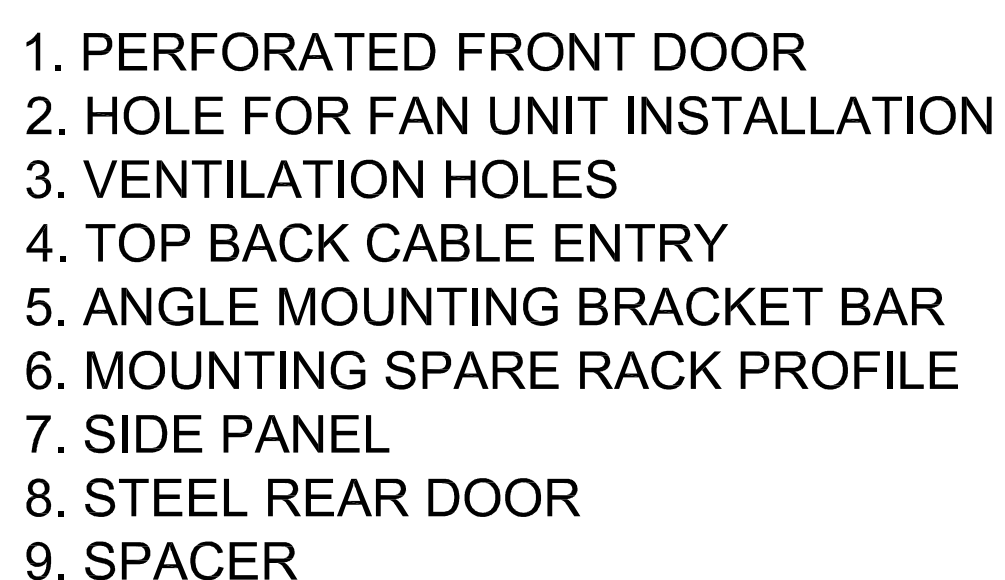


NETRACK STANDARD	983MM
MAXIMUM	1127MM
MINIMUM	167MM

SECTION A-A

-TOP COVER VIEW

019-420-812-112

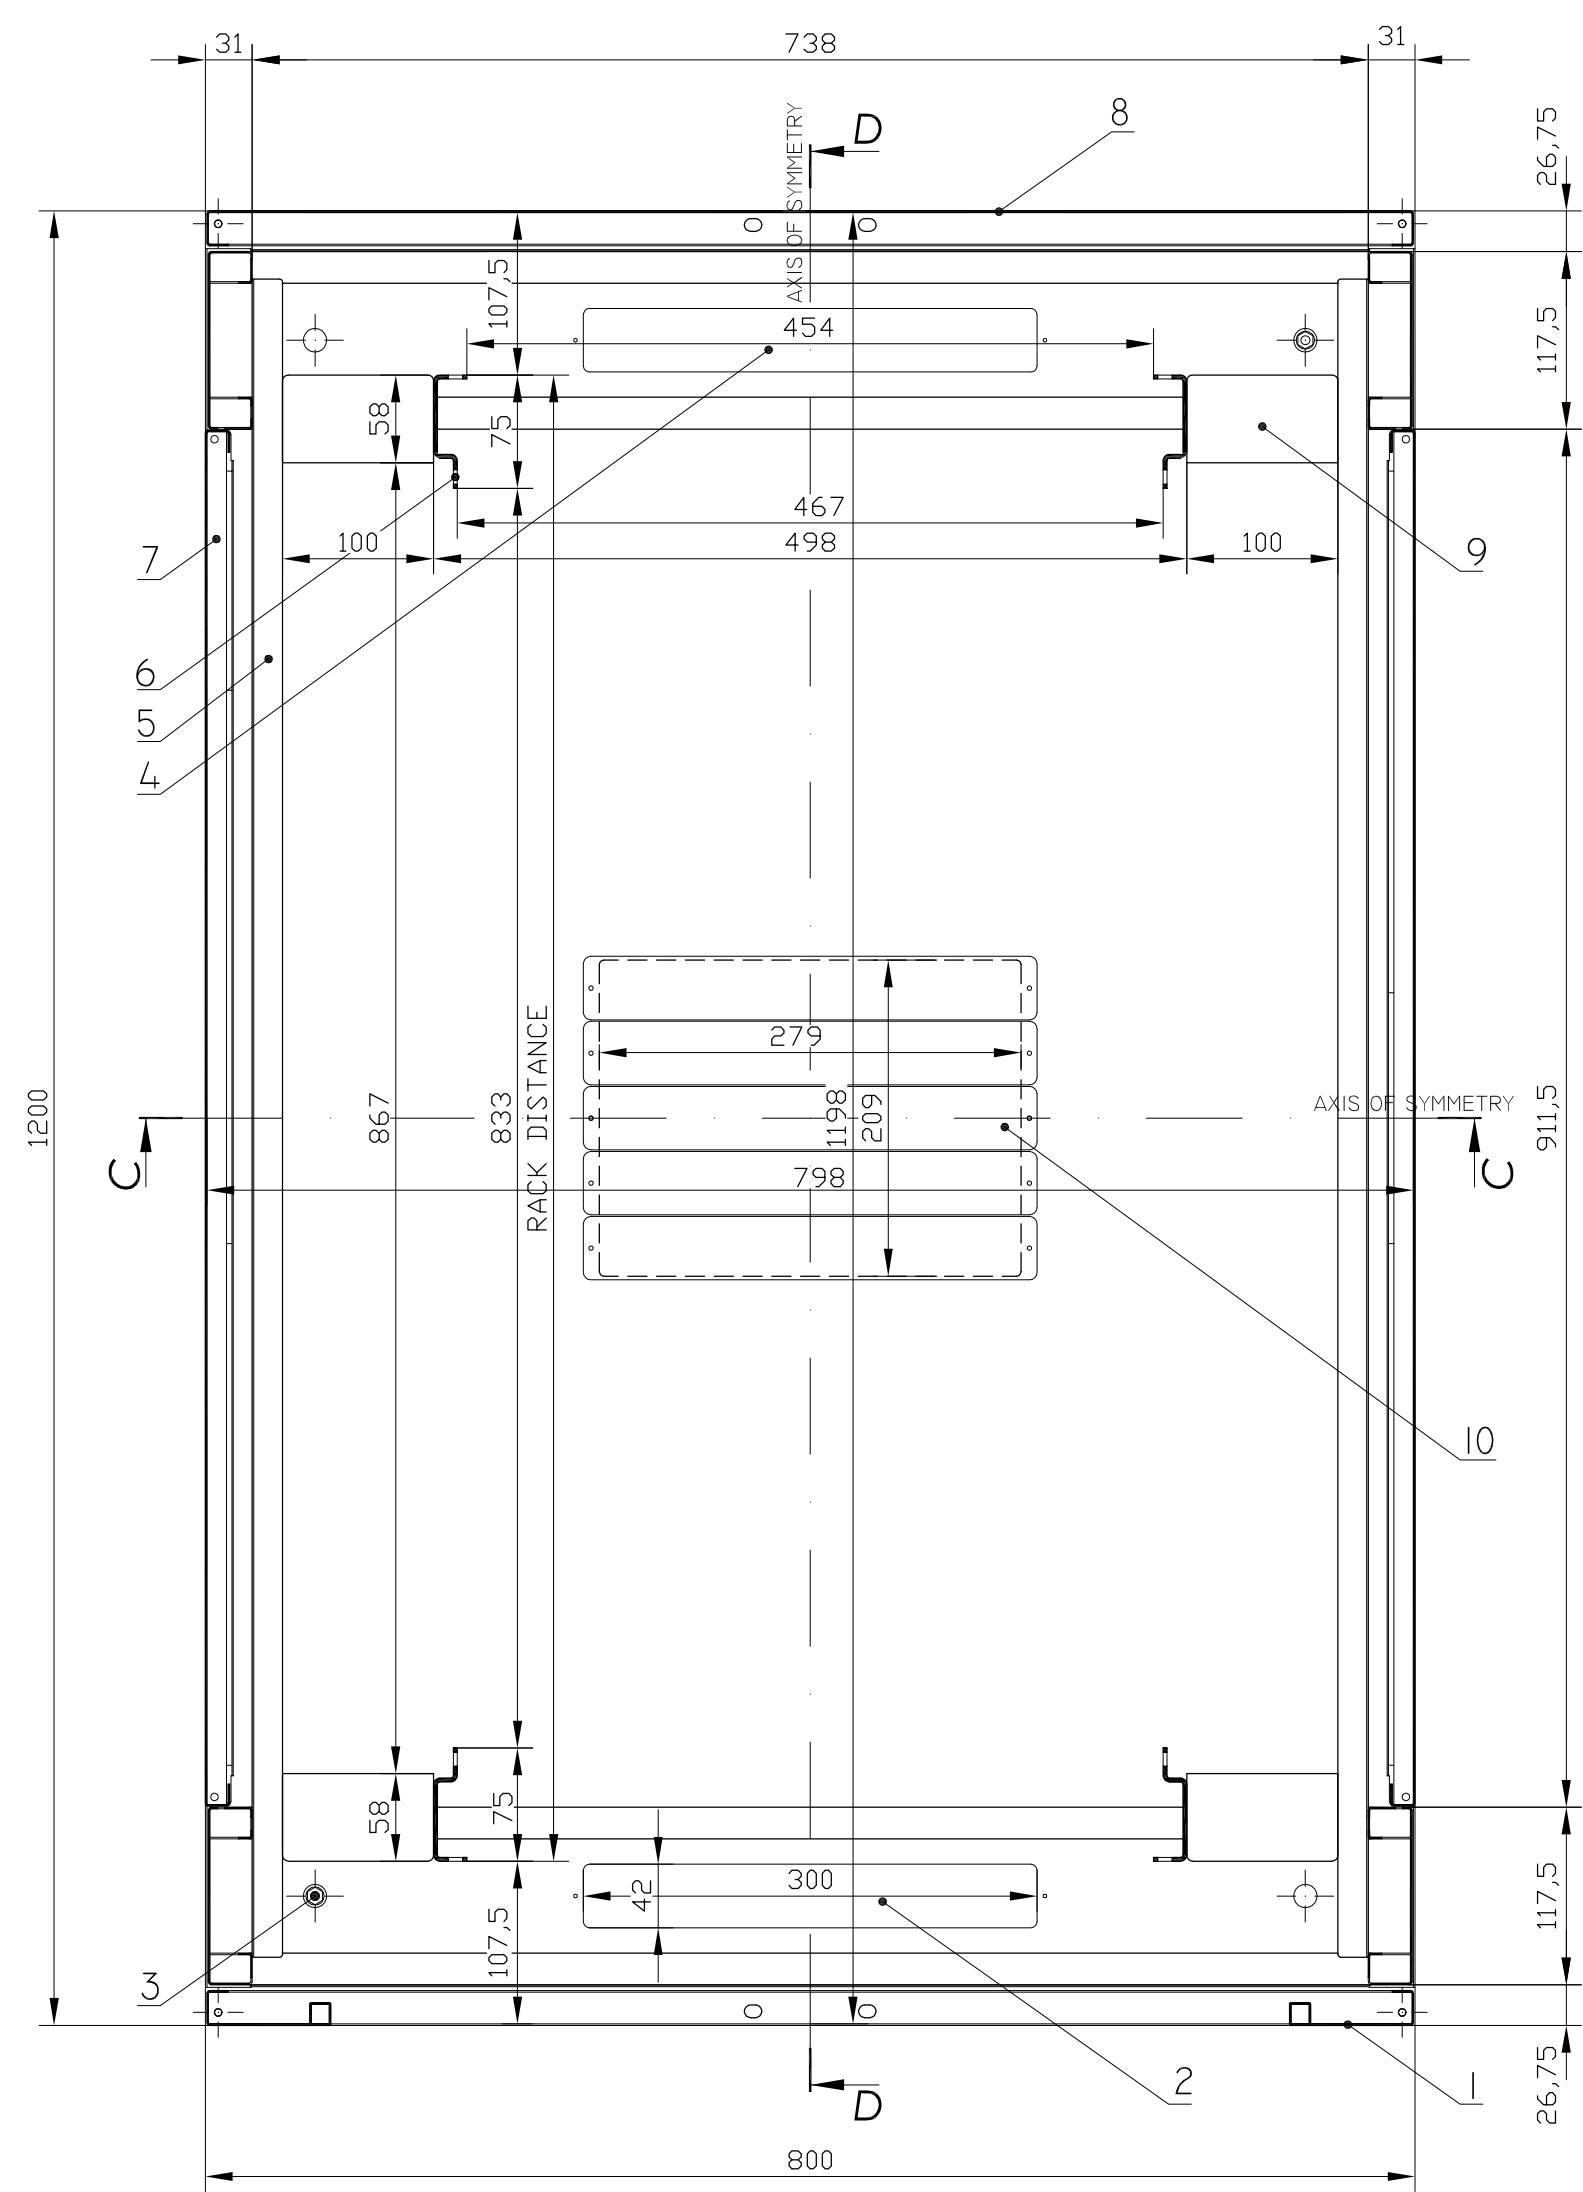


- 1. PERFORATED FRONT DOOR
- 2. BOTTOM FRONT CABLE ENTRY
- 3. GROUND CONNECTION BOLT IN THE CABINET
- 4. BOTTOM BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. SPACER
- 10. BOTTOM CENTRAL CABLE ENTRY

RACK DISTANCES

NETRACK STANDARD	983MM
MAXIMUM	1127MM
MINIMUM	167MM

SECTION B-B
-BOTTOM PANEL VIEW


019-420-812-112

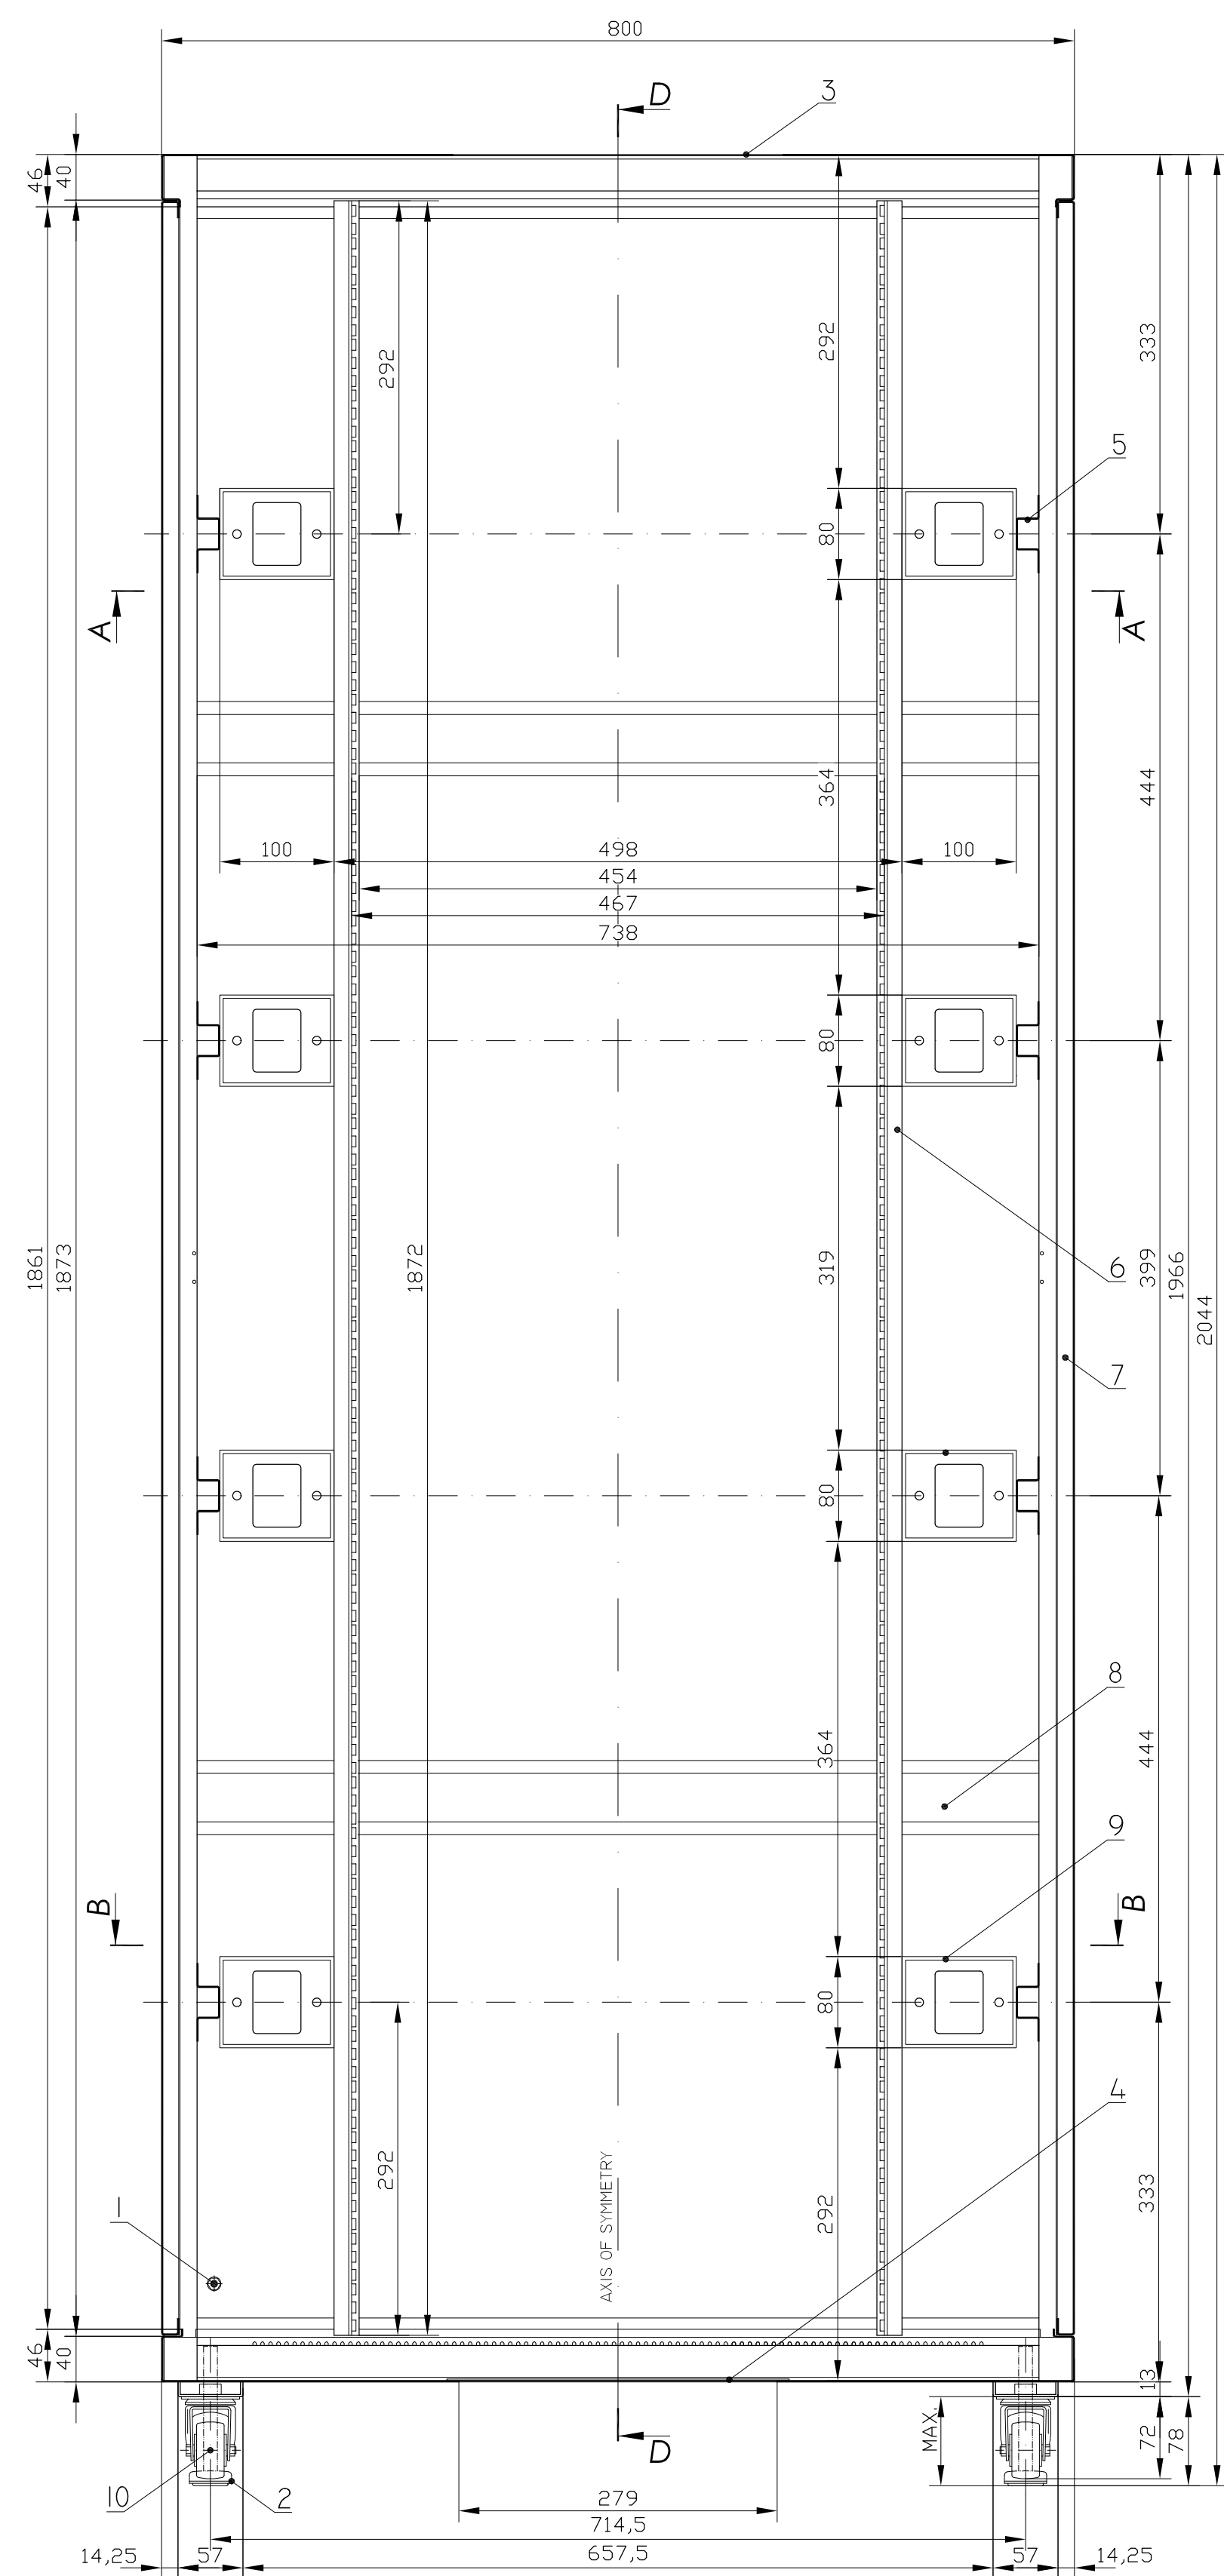

- 1. GROUND CONECTION BOLT IN THE DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. BOTTOM CENTRAL CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. SPACER
- 10. 2" CASTOR WHEELS

SECTION C-C


019-420-812-112

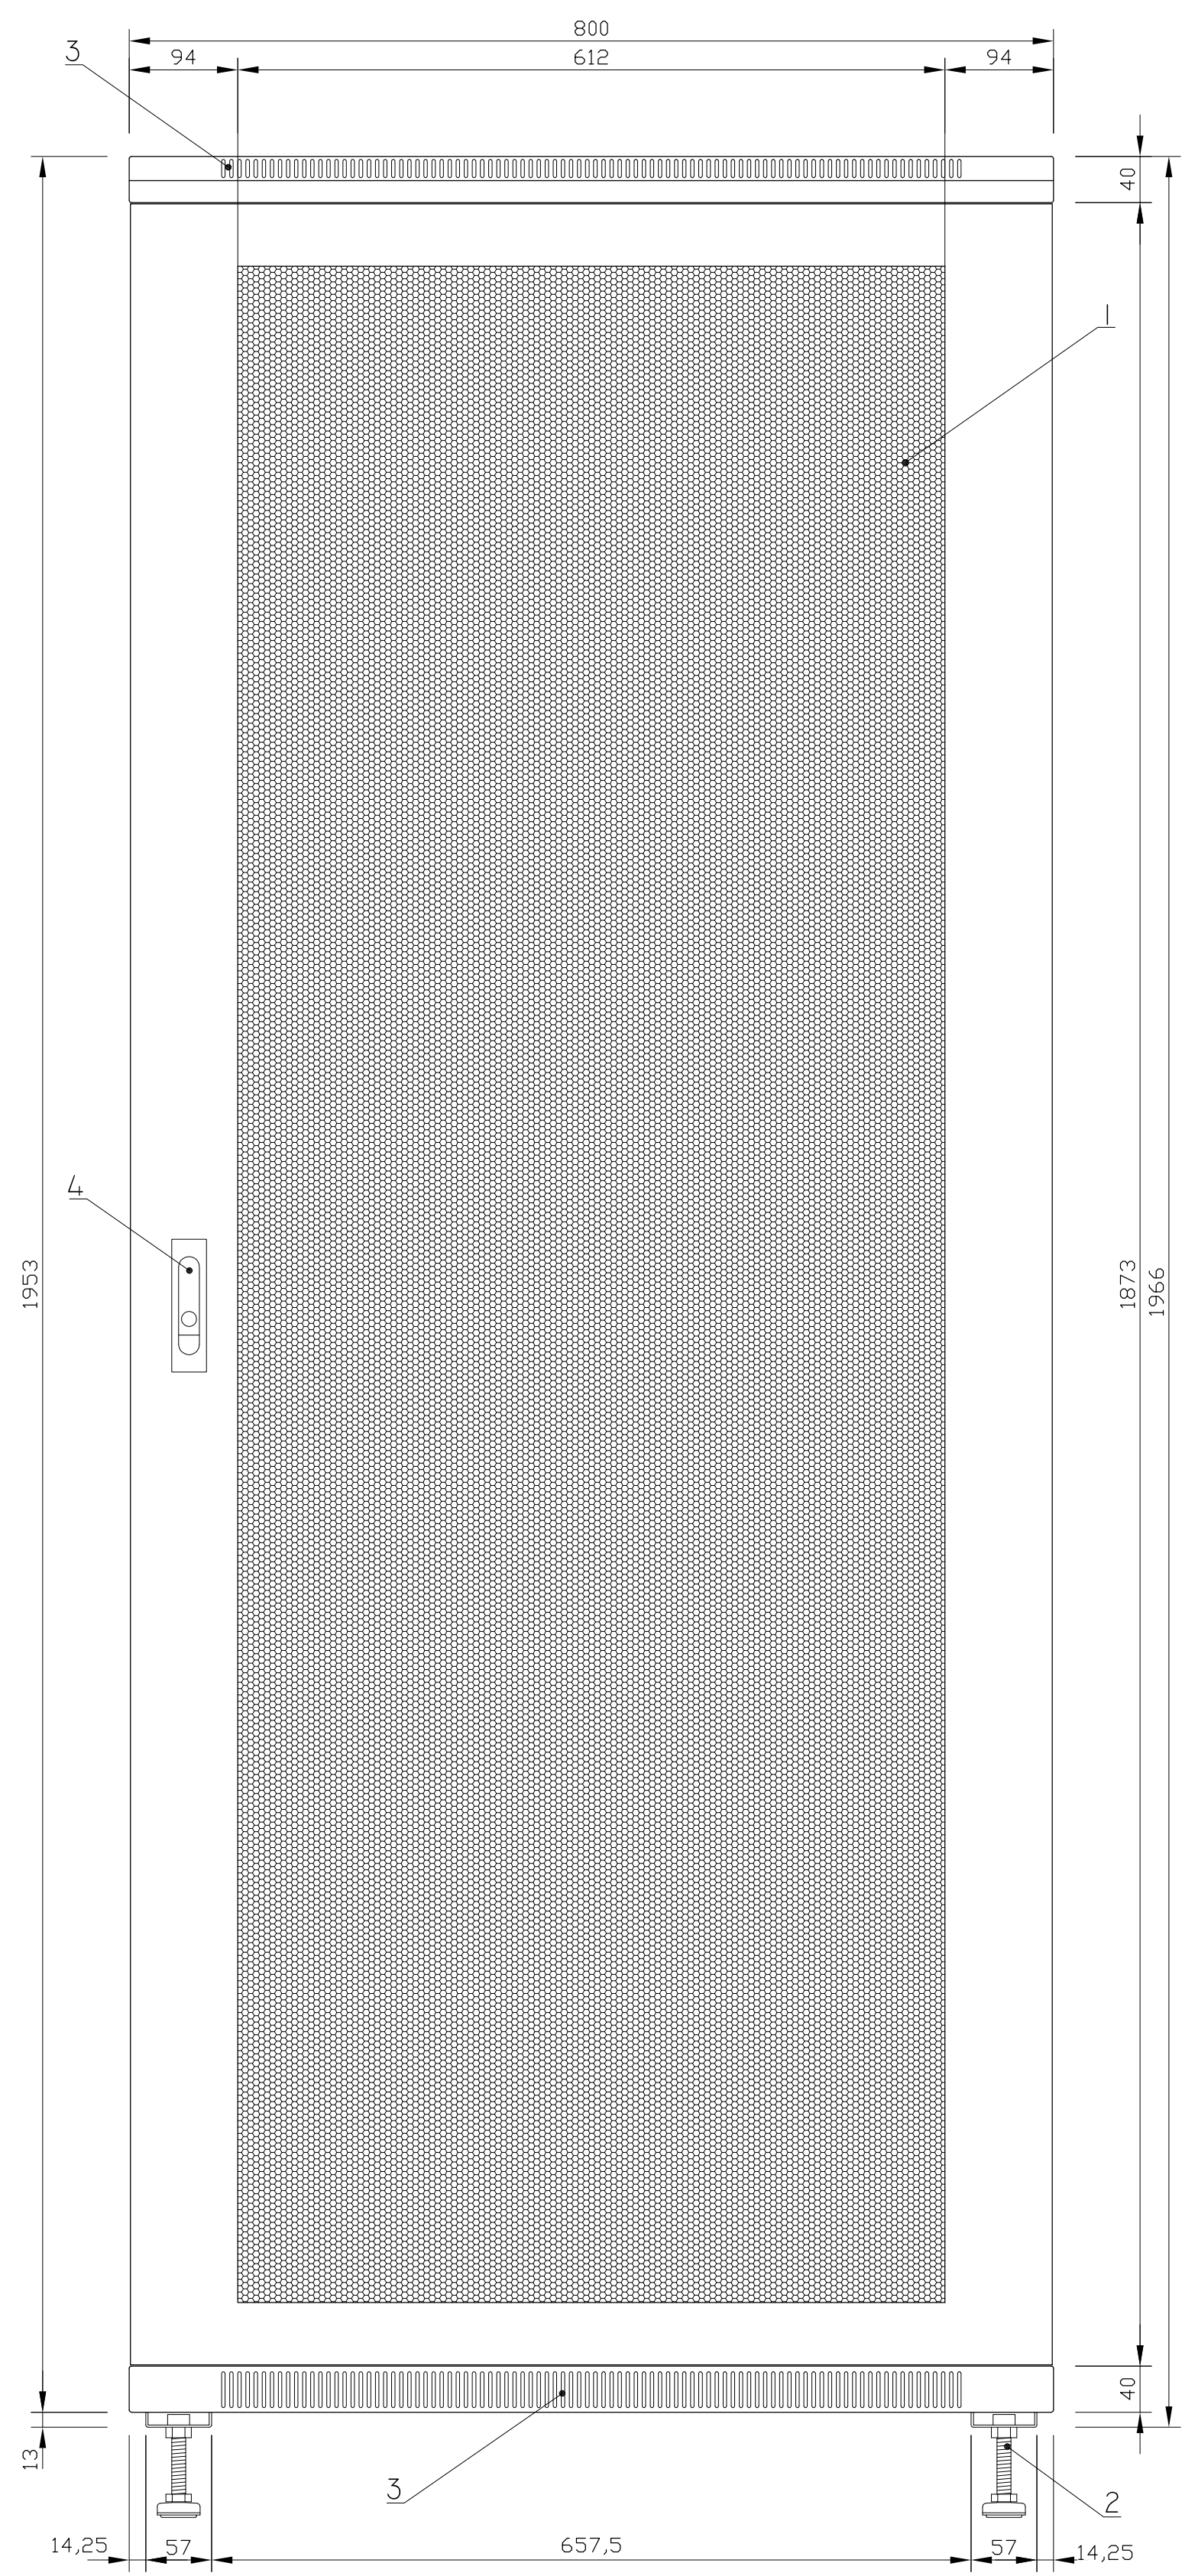

- 1. PERFORATED FRONT DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. FRONT DOOR LOCK INSTALLATION SPACE

FRONT ELEVATION


019-420-812-112

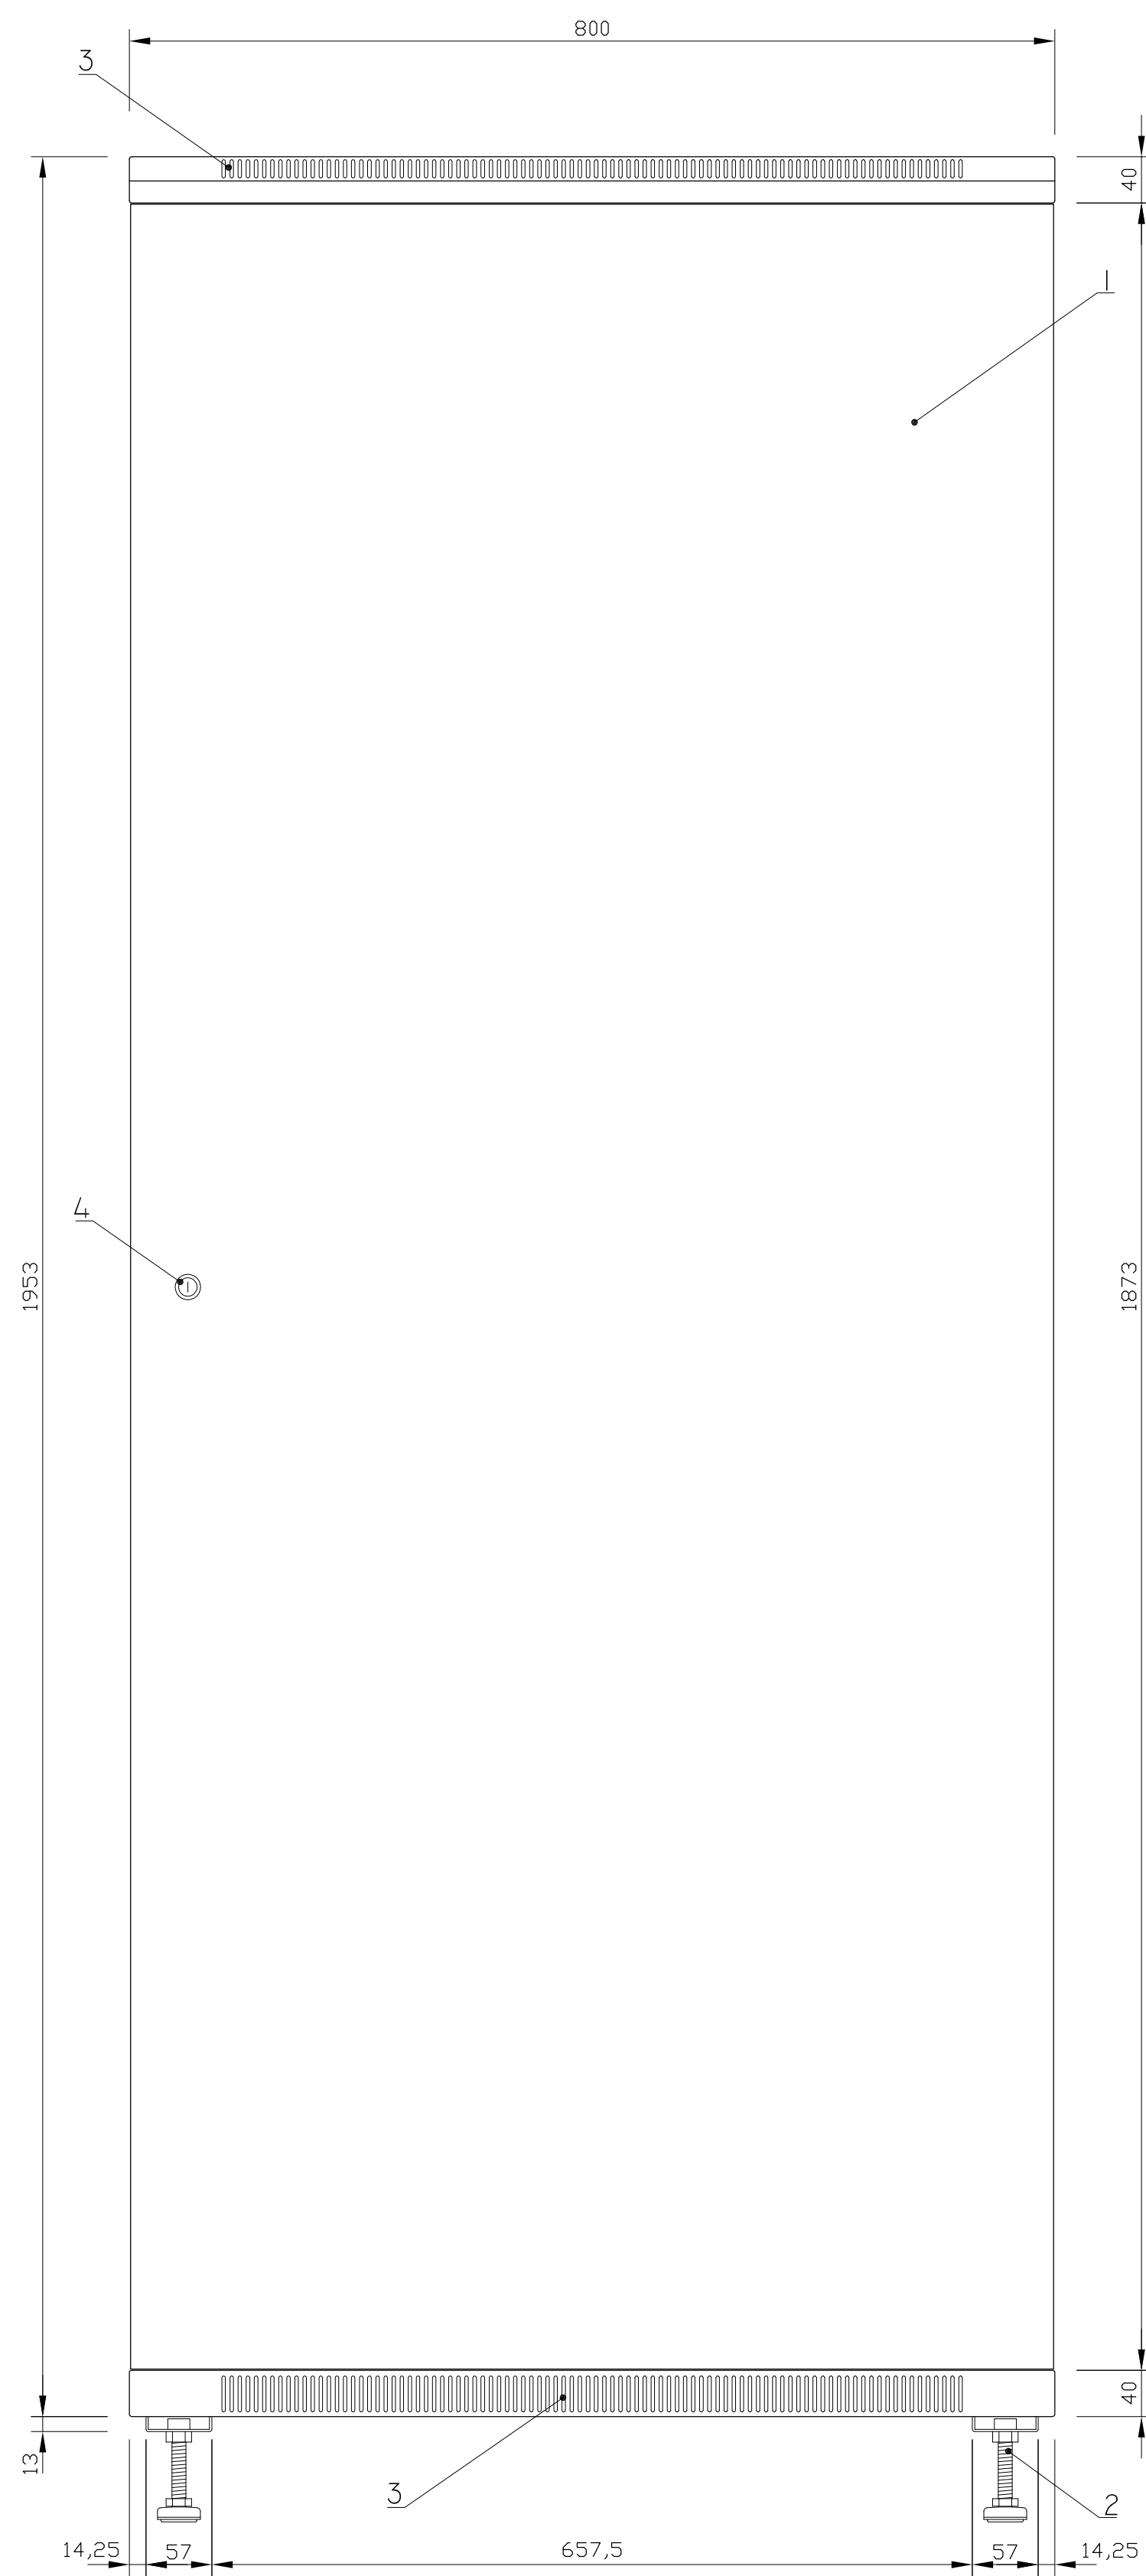

- 1. STEEL REAR DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. REAR DOOR LOCK INSTALLATION SPACE

REAR ELEVATION


019-420-812-112

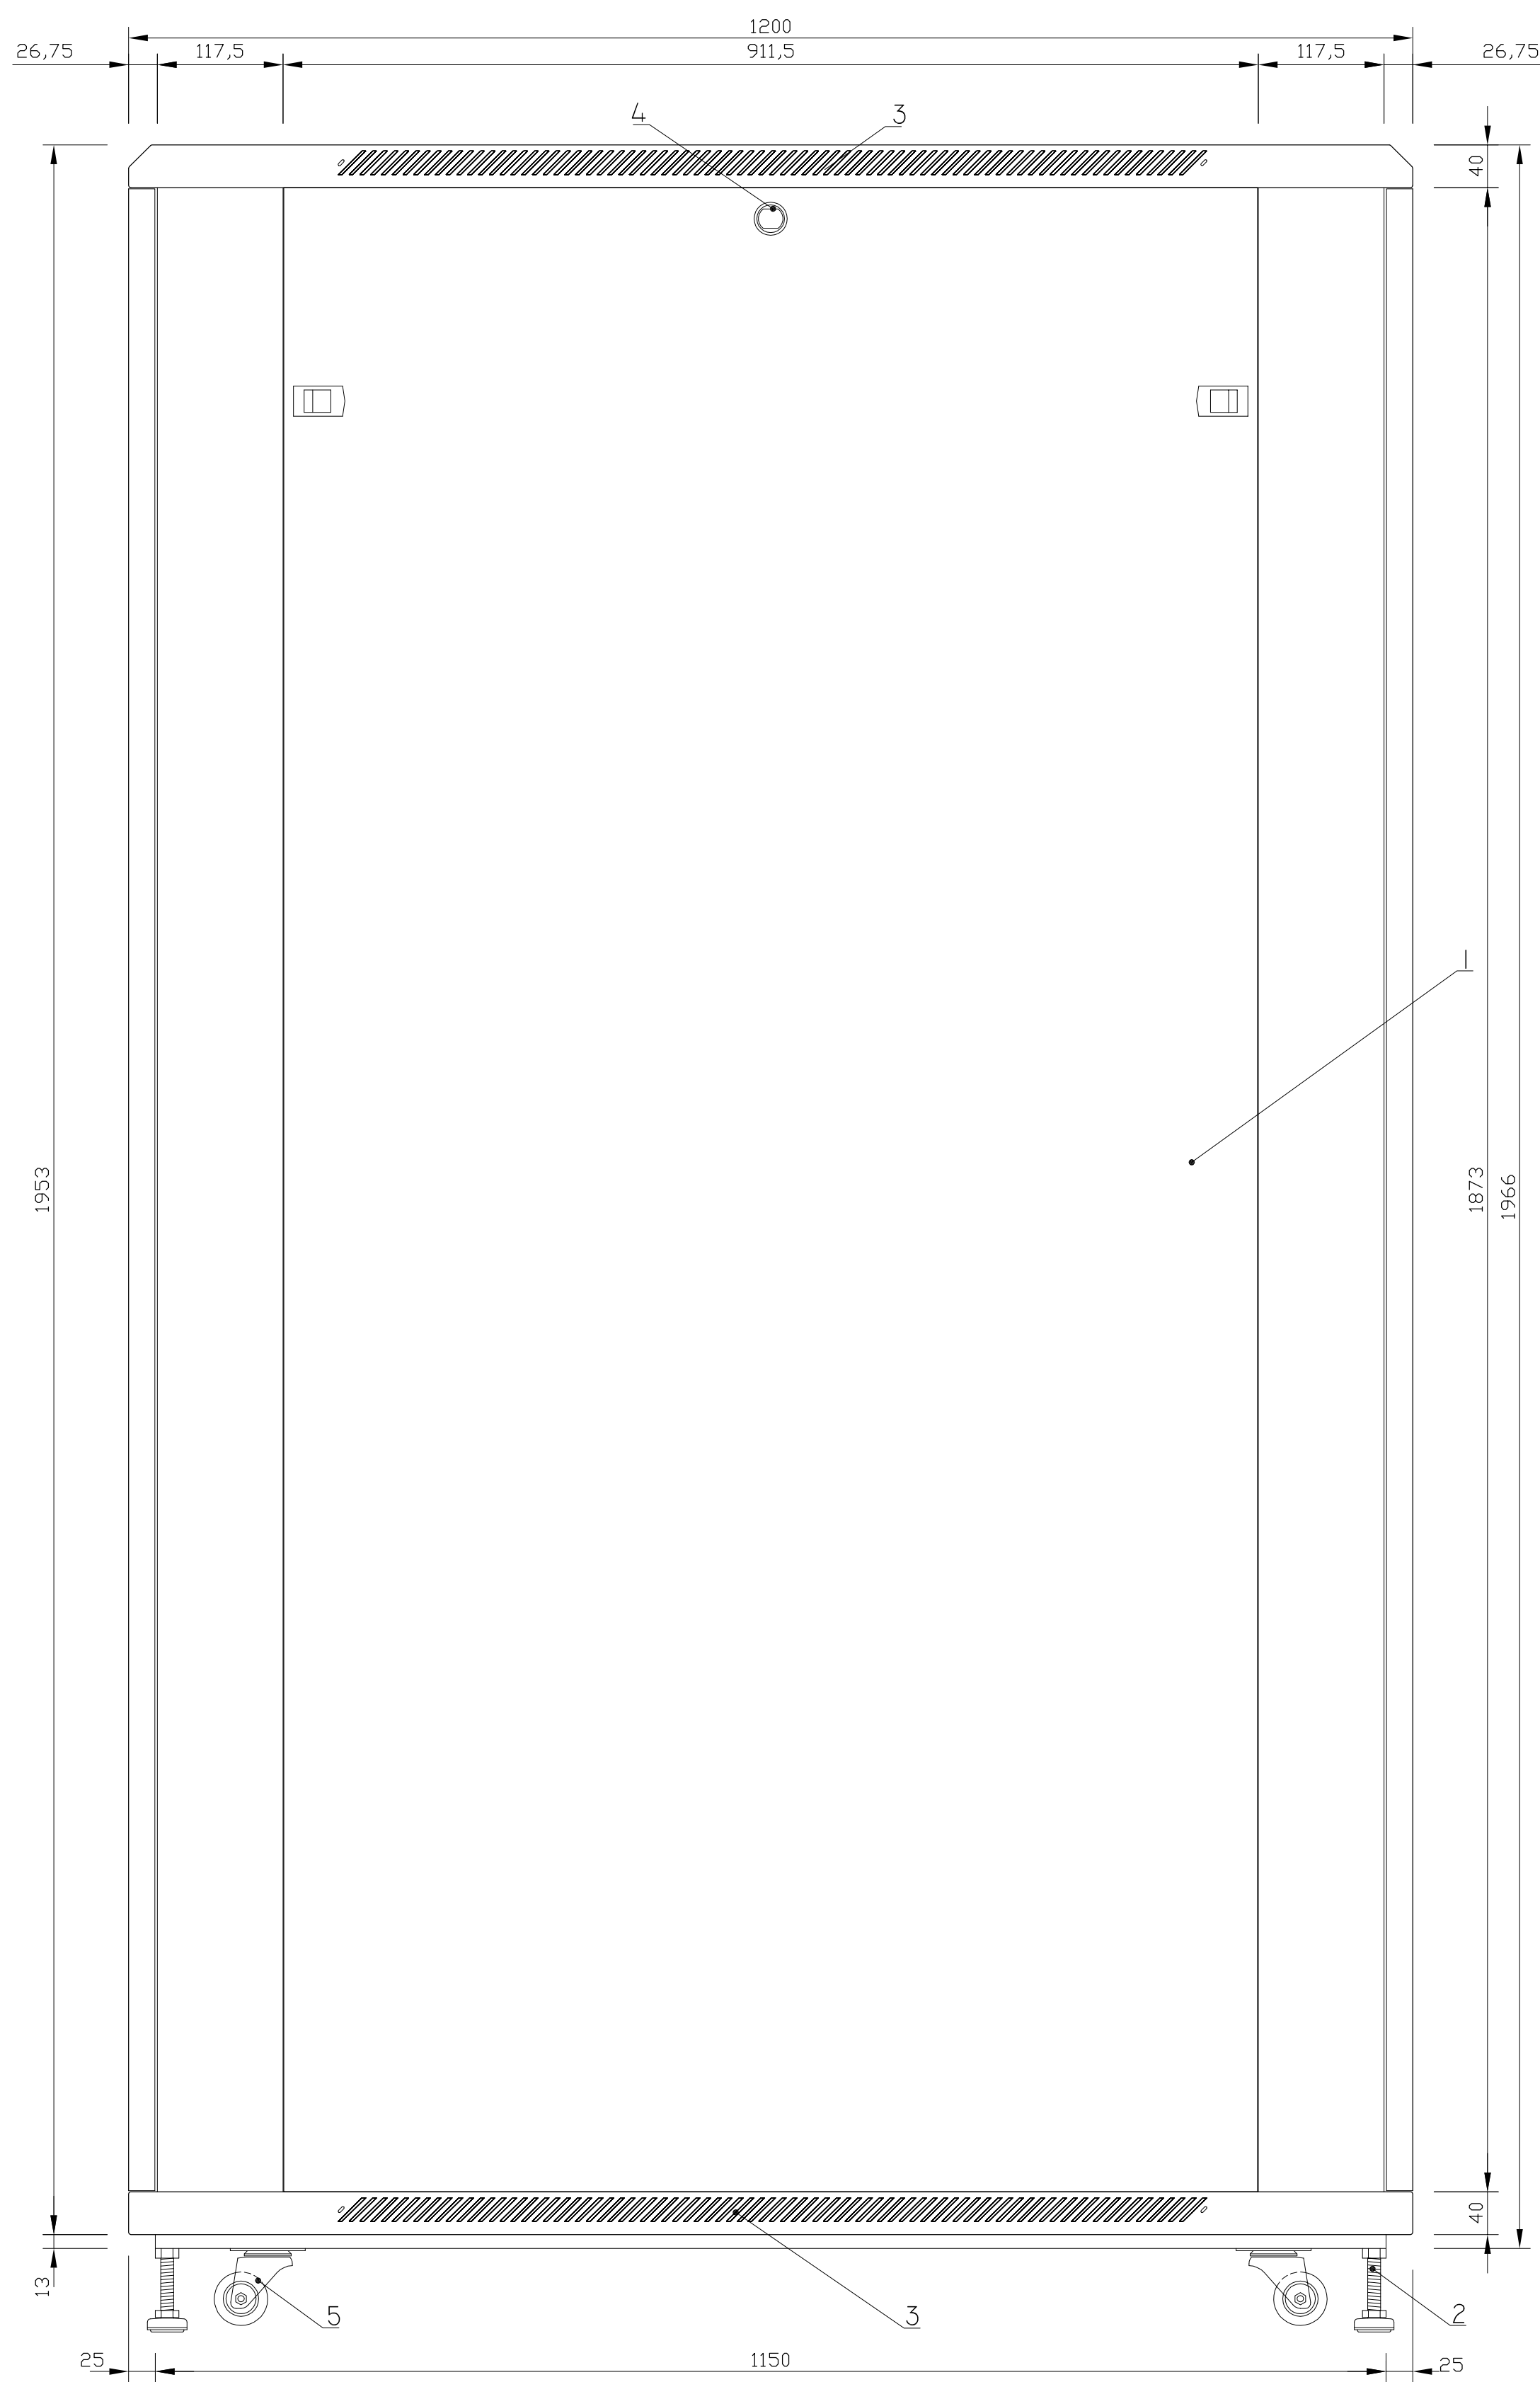

- 1. SIDE PANEL
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. SIDE PANEL LOCK INSTALLATION SPACE
- 5. 2" CASTOR WHEELS

SIDE ELEVATION

019-420-812-112

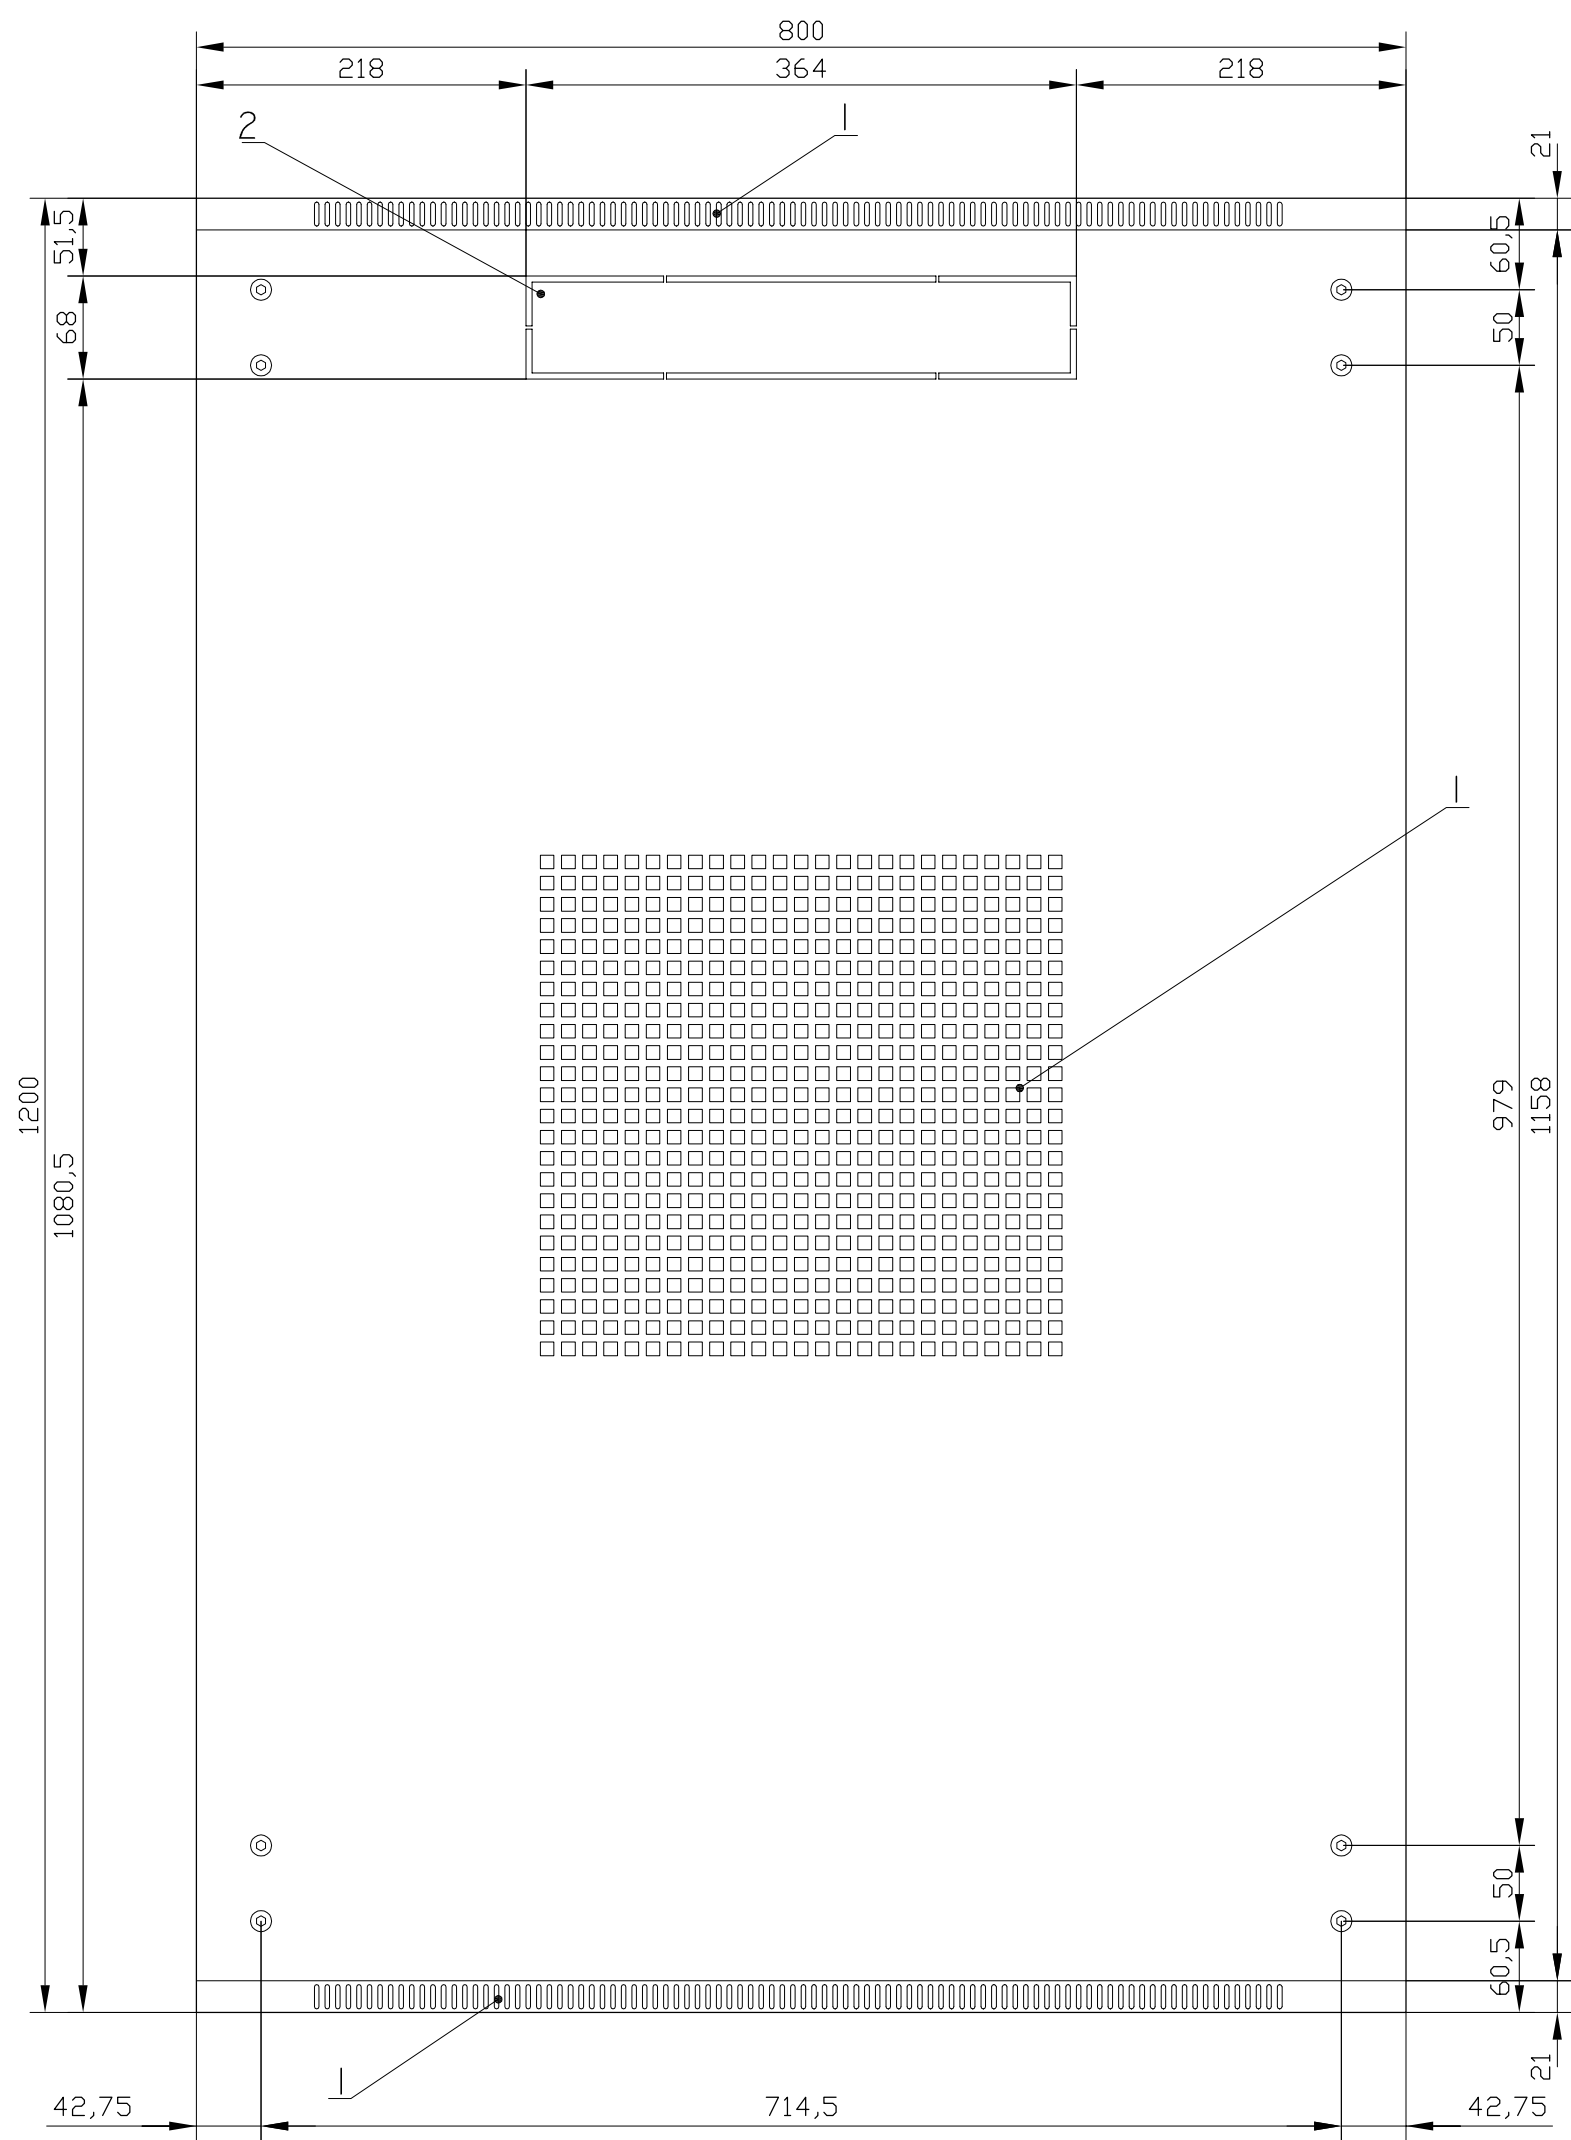

- 1. VENTILATION HOLES
- 2. TOP BACK CABLE ENTRY

TOP ELEVATION