




019-320-610-112

Netrack standing server cabinet
32U/600x1000mm - perforated door

019-320-610-112

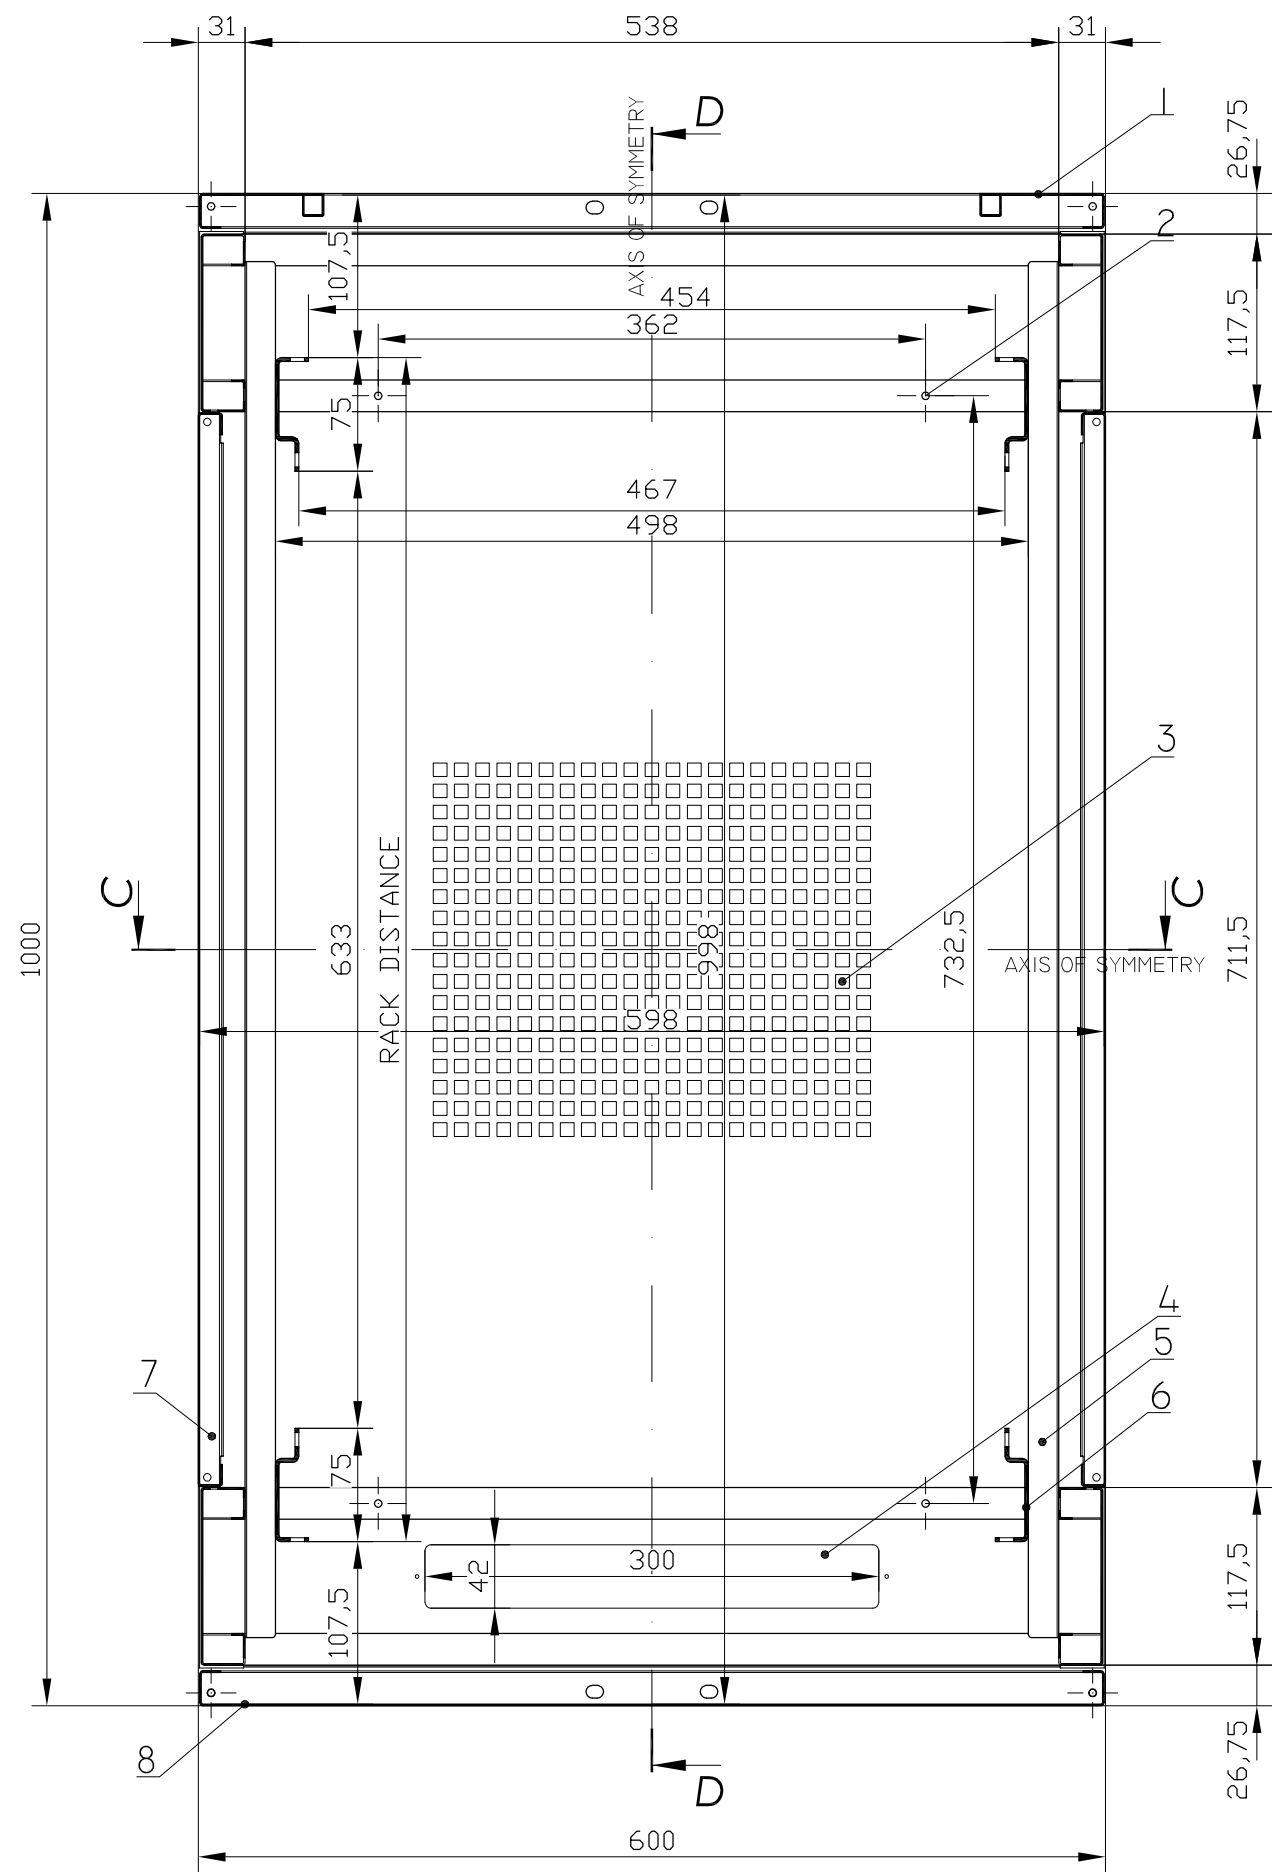


- 1. PERFORATED FRONT DOOR
- 2. HOLE FOR FAN UNIT INSTALLATION
- 3. VENTILATION HOLES
- 4. TOP BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR

RACK DISTANCES

NETRACK STANDARD	783MM
MAXIMUM	927MM
MINIMUM	167MM

SECTION A-A
- TOP COVER VIEW


019-320-610-112

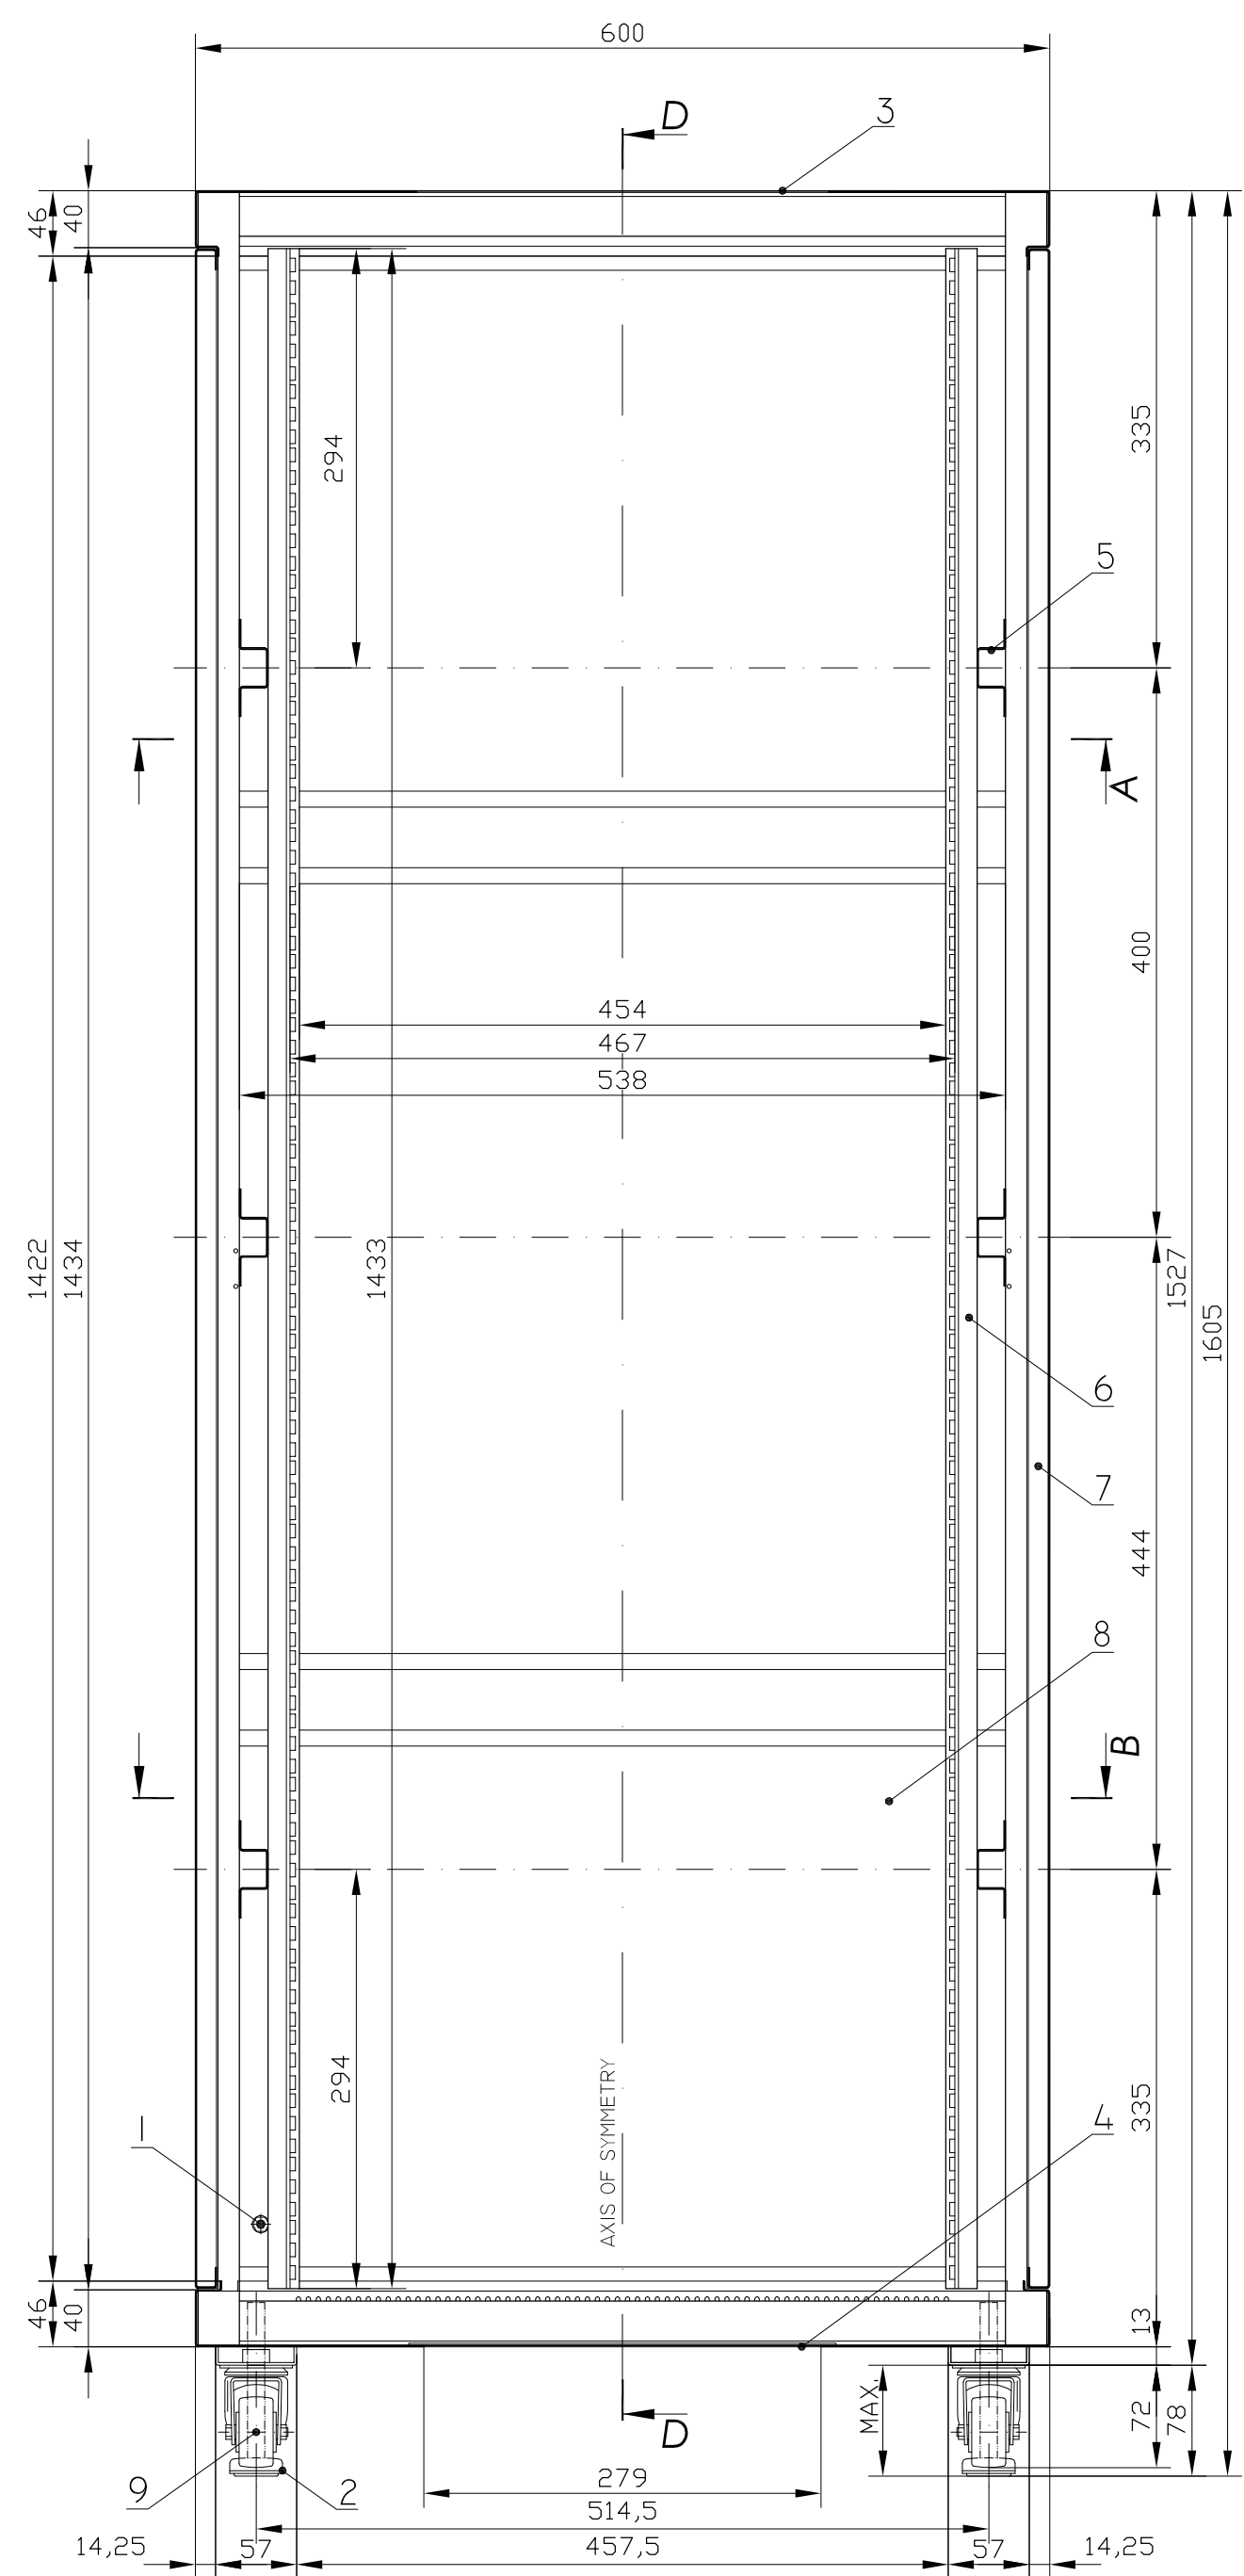

- 1. GROUND CONECTION BOLT IN THE DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. BOTTOM CENTRAL CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. 2" CASTOR WHEELS

SECTION C-C

019-320-610-112

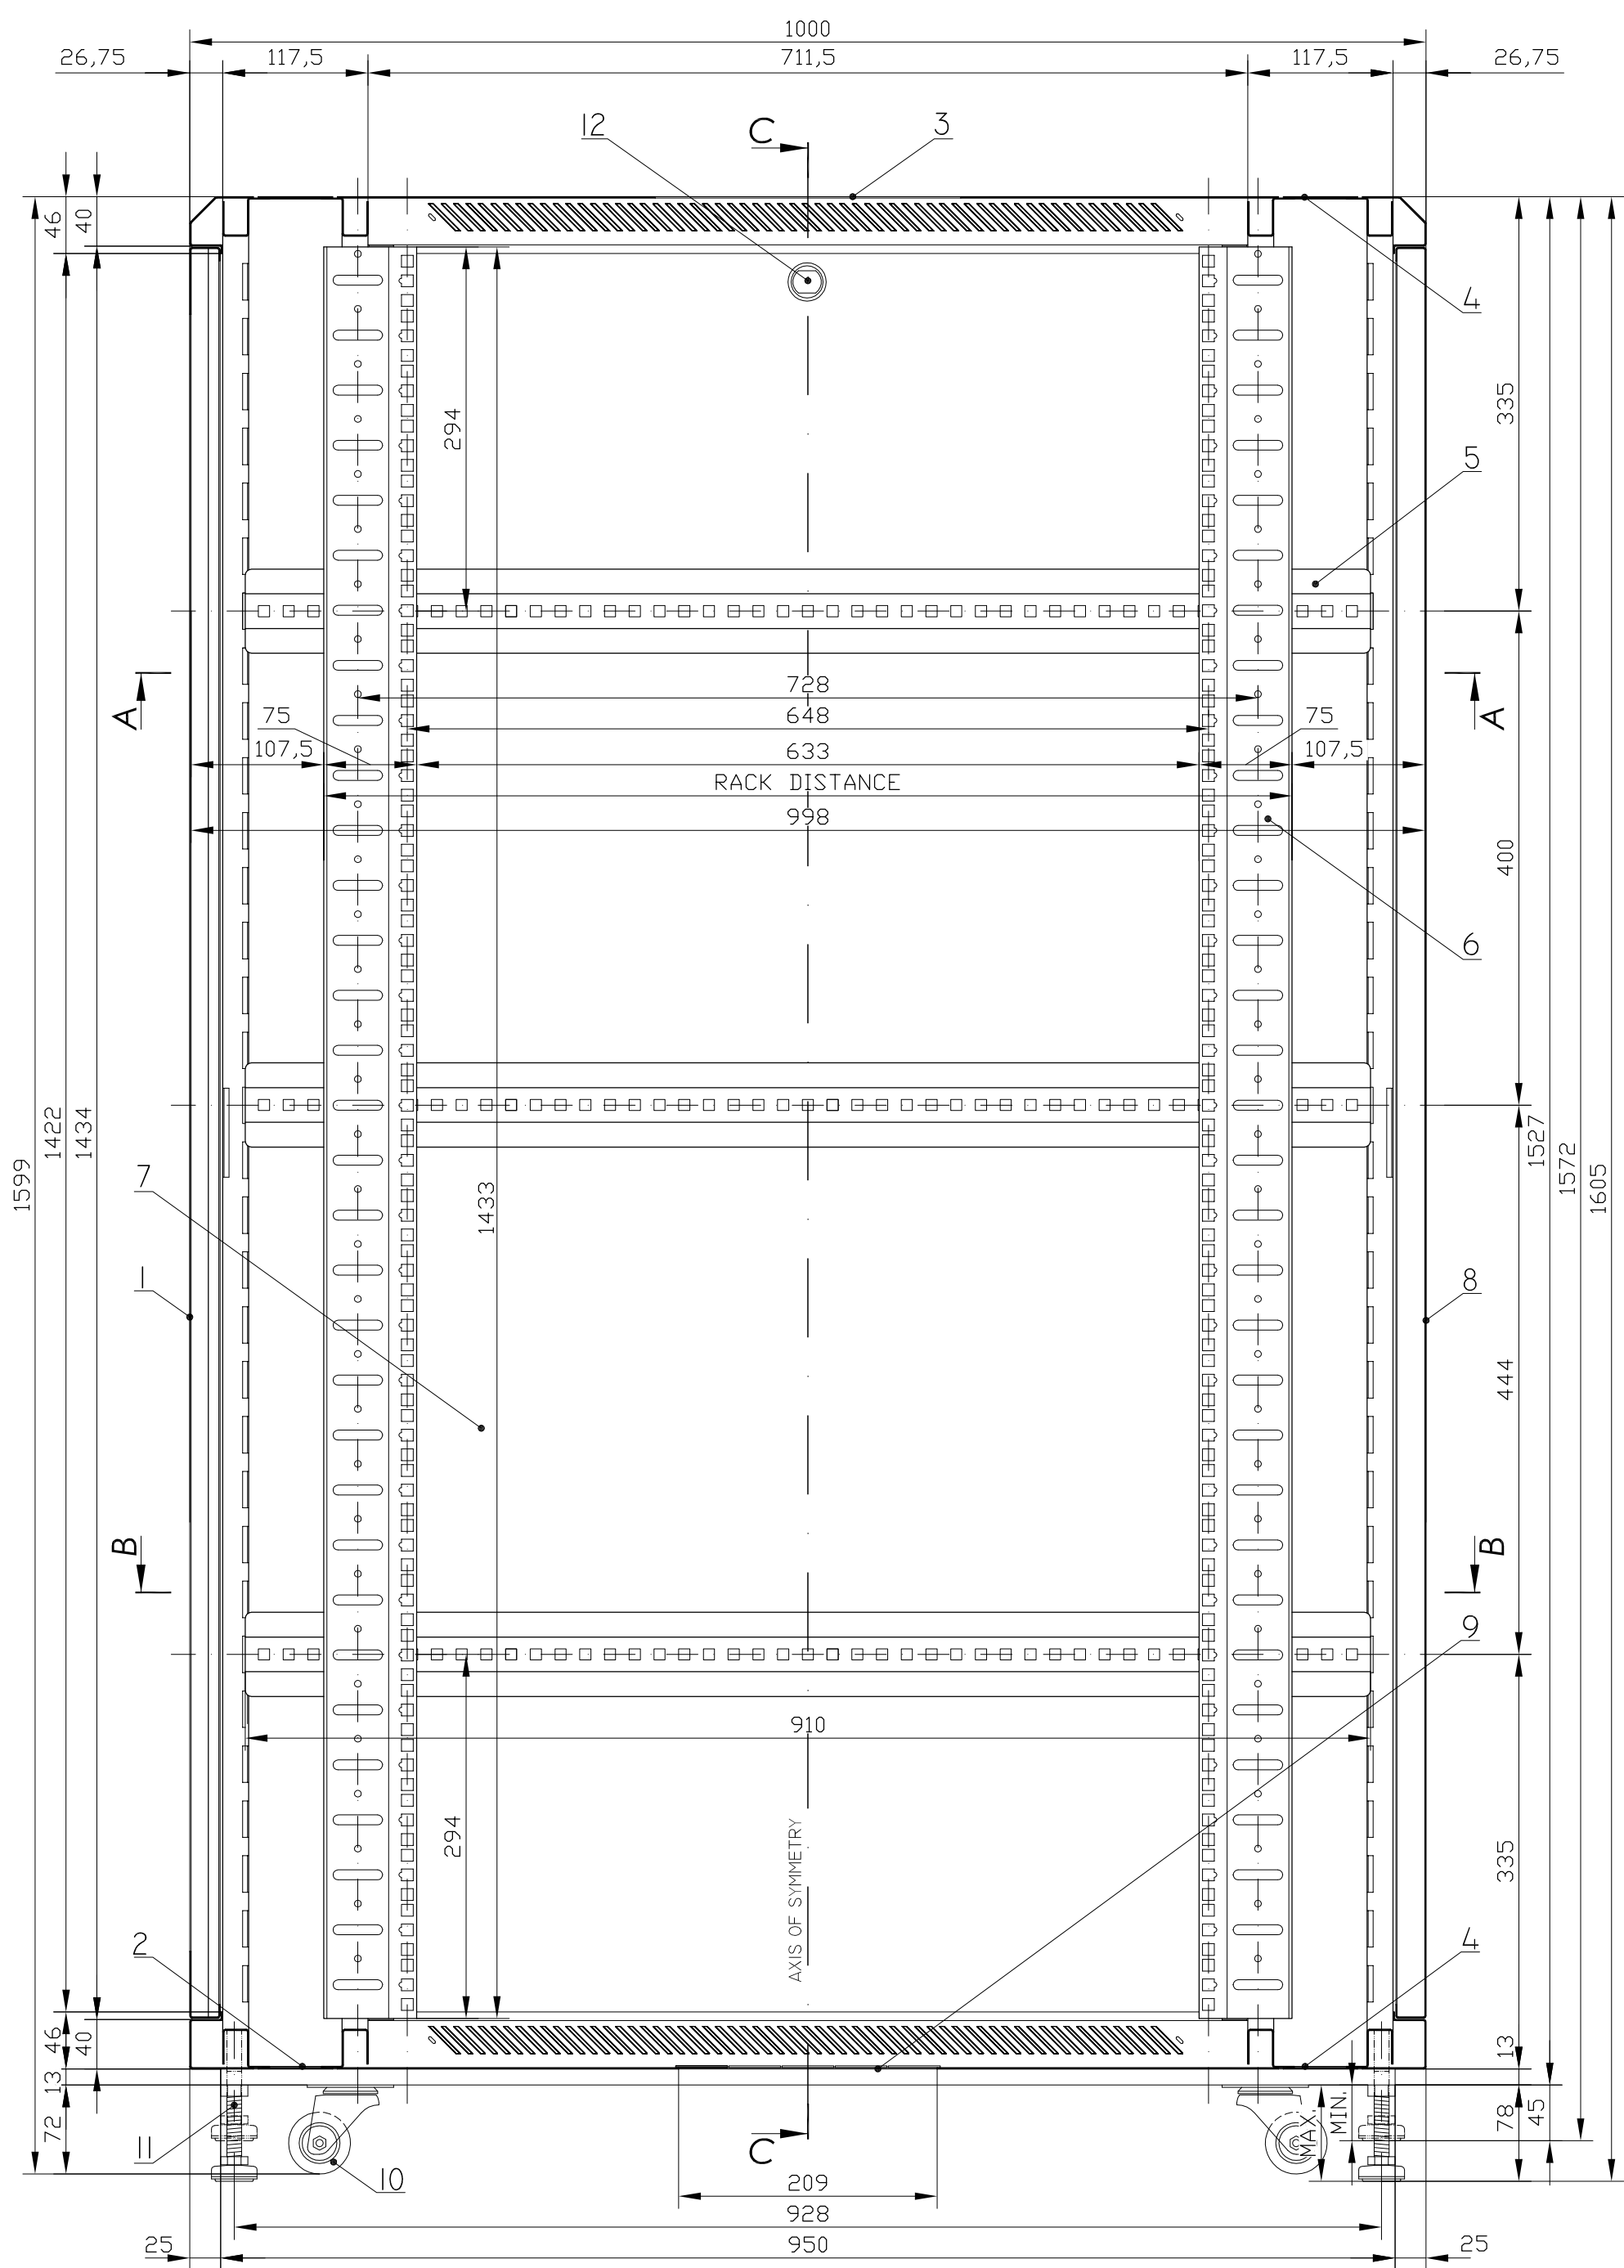


- 1. PERFORATED FRONT DOOR
- 2. BOTTOM FRONT CABLE ENTRY
- 3. VENTILATION HOLES
- 4. TOP/BOTTOM BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR
- 9. BOTTOM CENTRAL CABLE ENTRY
- 10. 2" CASTOR WHEELS
- 11. ADJUSTABLE FEET
- 12.SIDE PANEL LOCK INSTALLATION SPACE

RACK DISTANCES

NETRACK STANDARD	783MM
MAXIMUM	927MM
MINIMUM	167MM

SECTION D-D


019-320-610-112

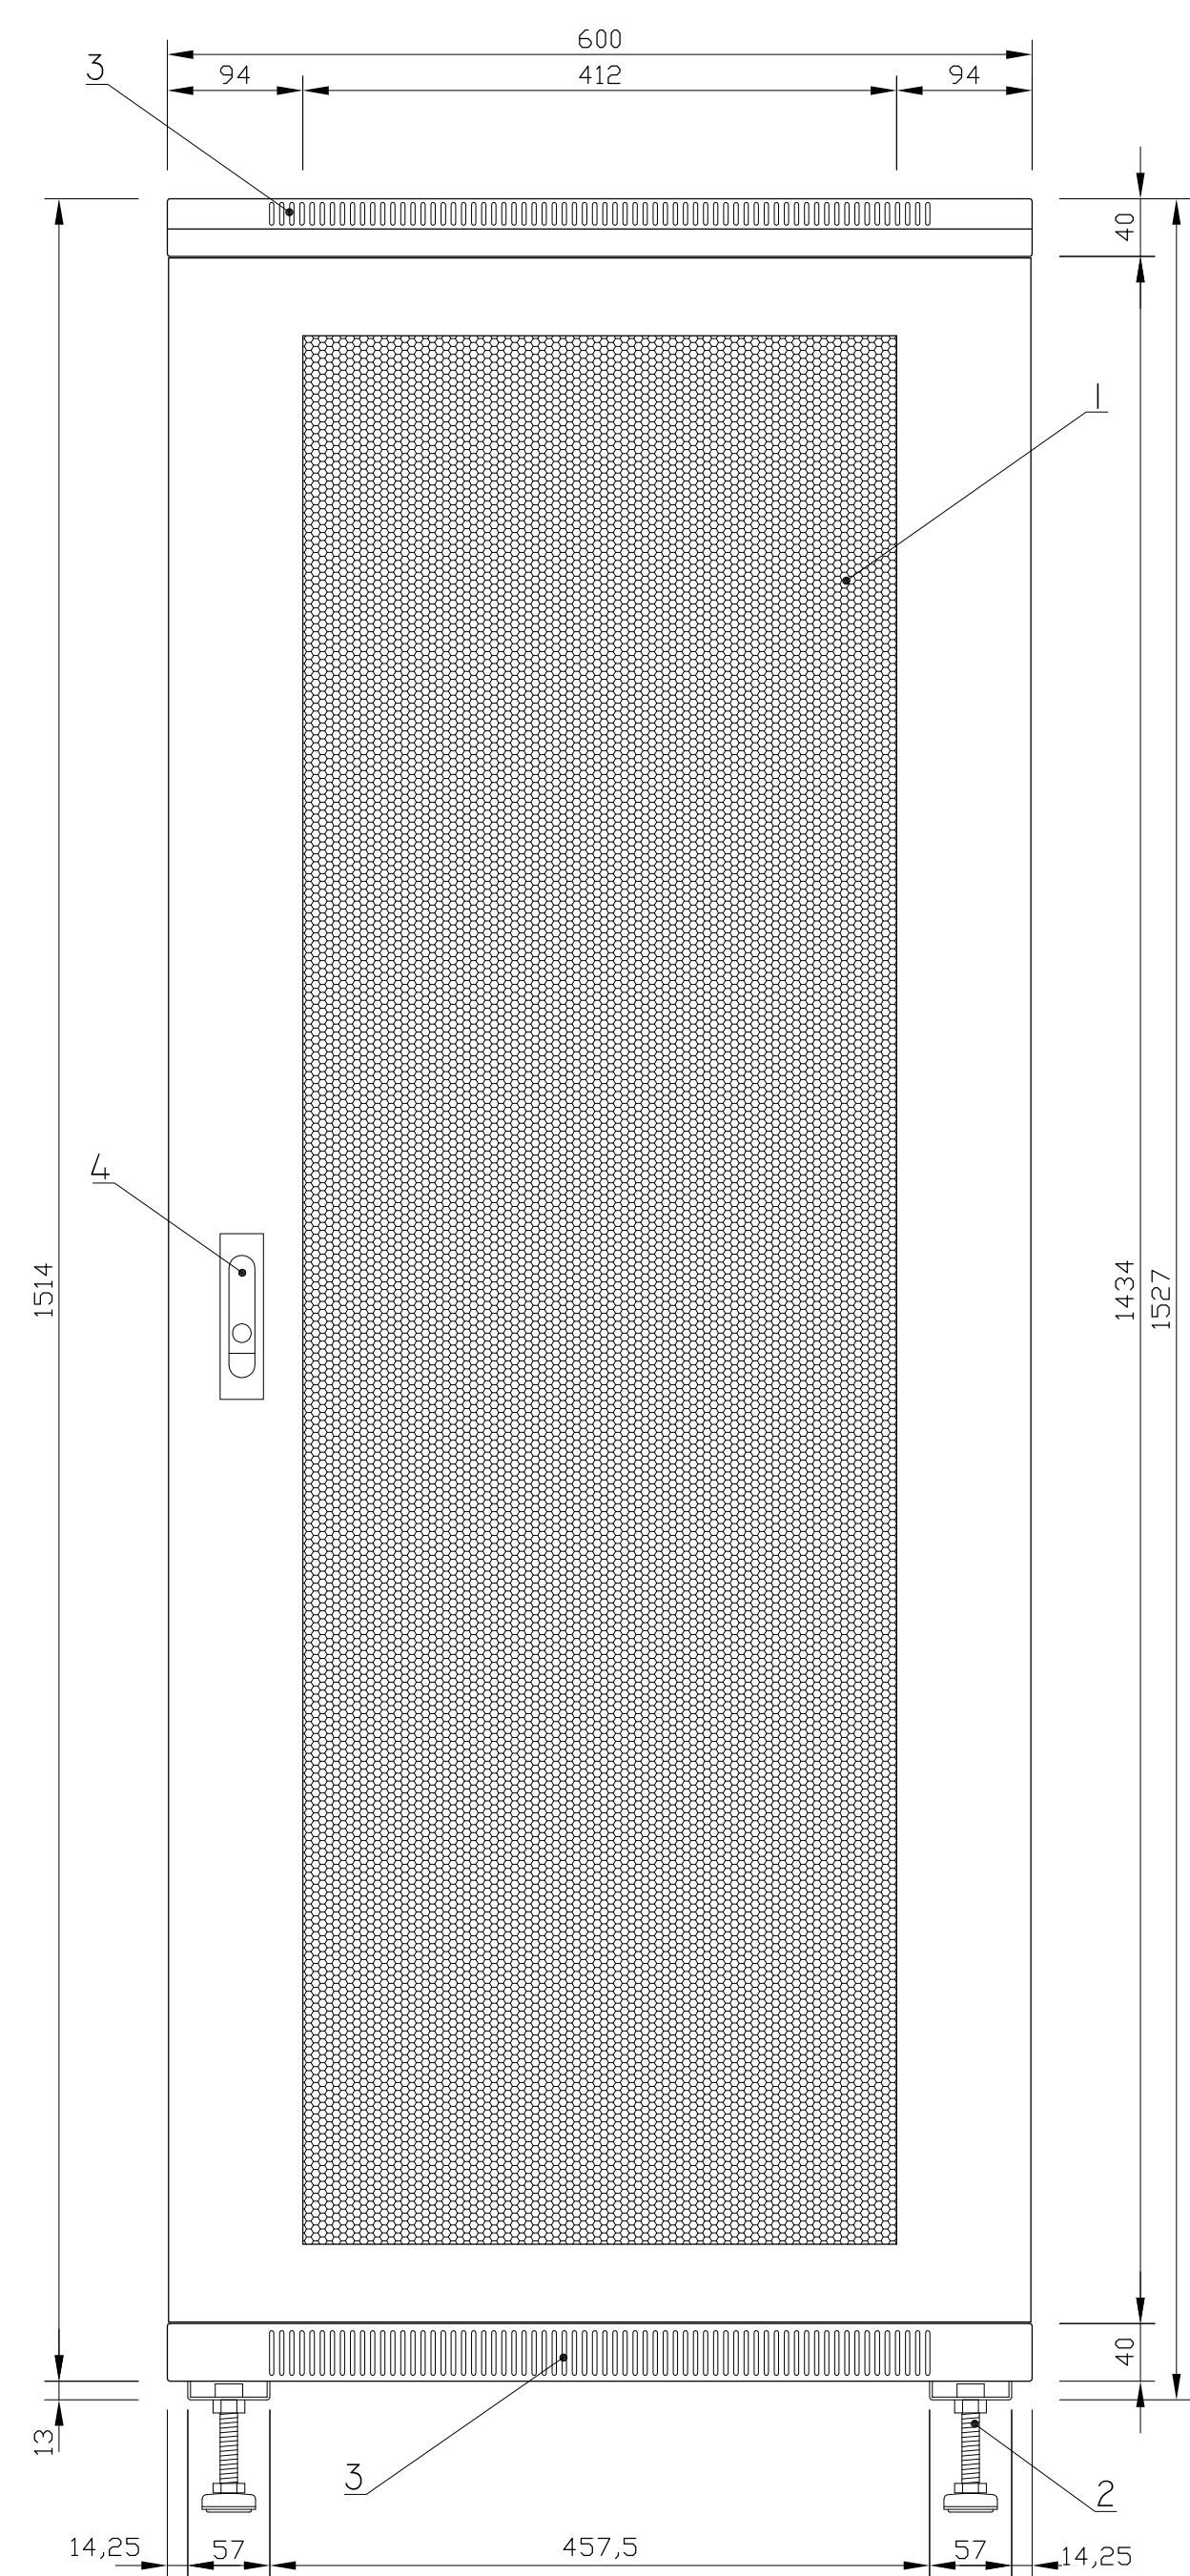

- 1. PERFORATED FRONT DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. FRONT DOOR LOCK INSTALLATION SPACE

FRONT ELEVATION


019-320-610-112

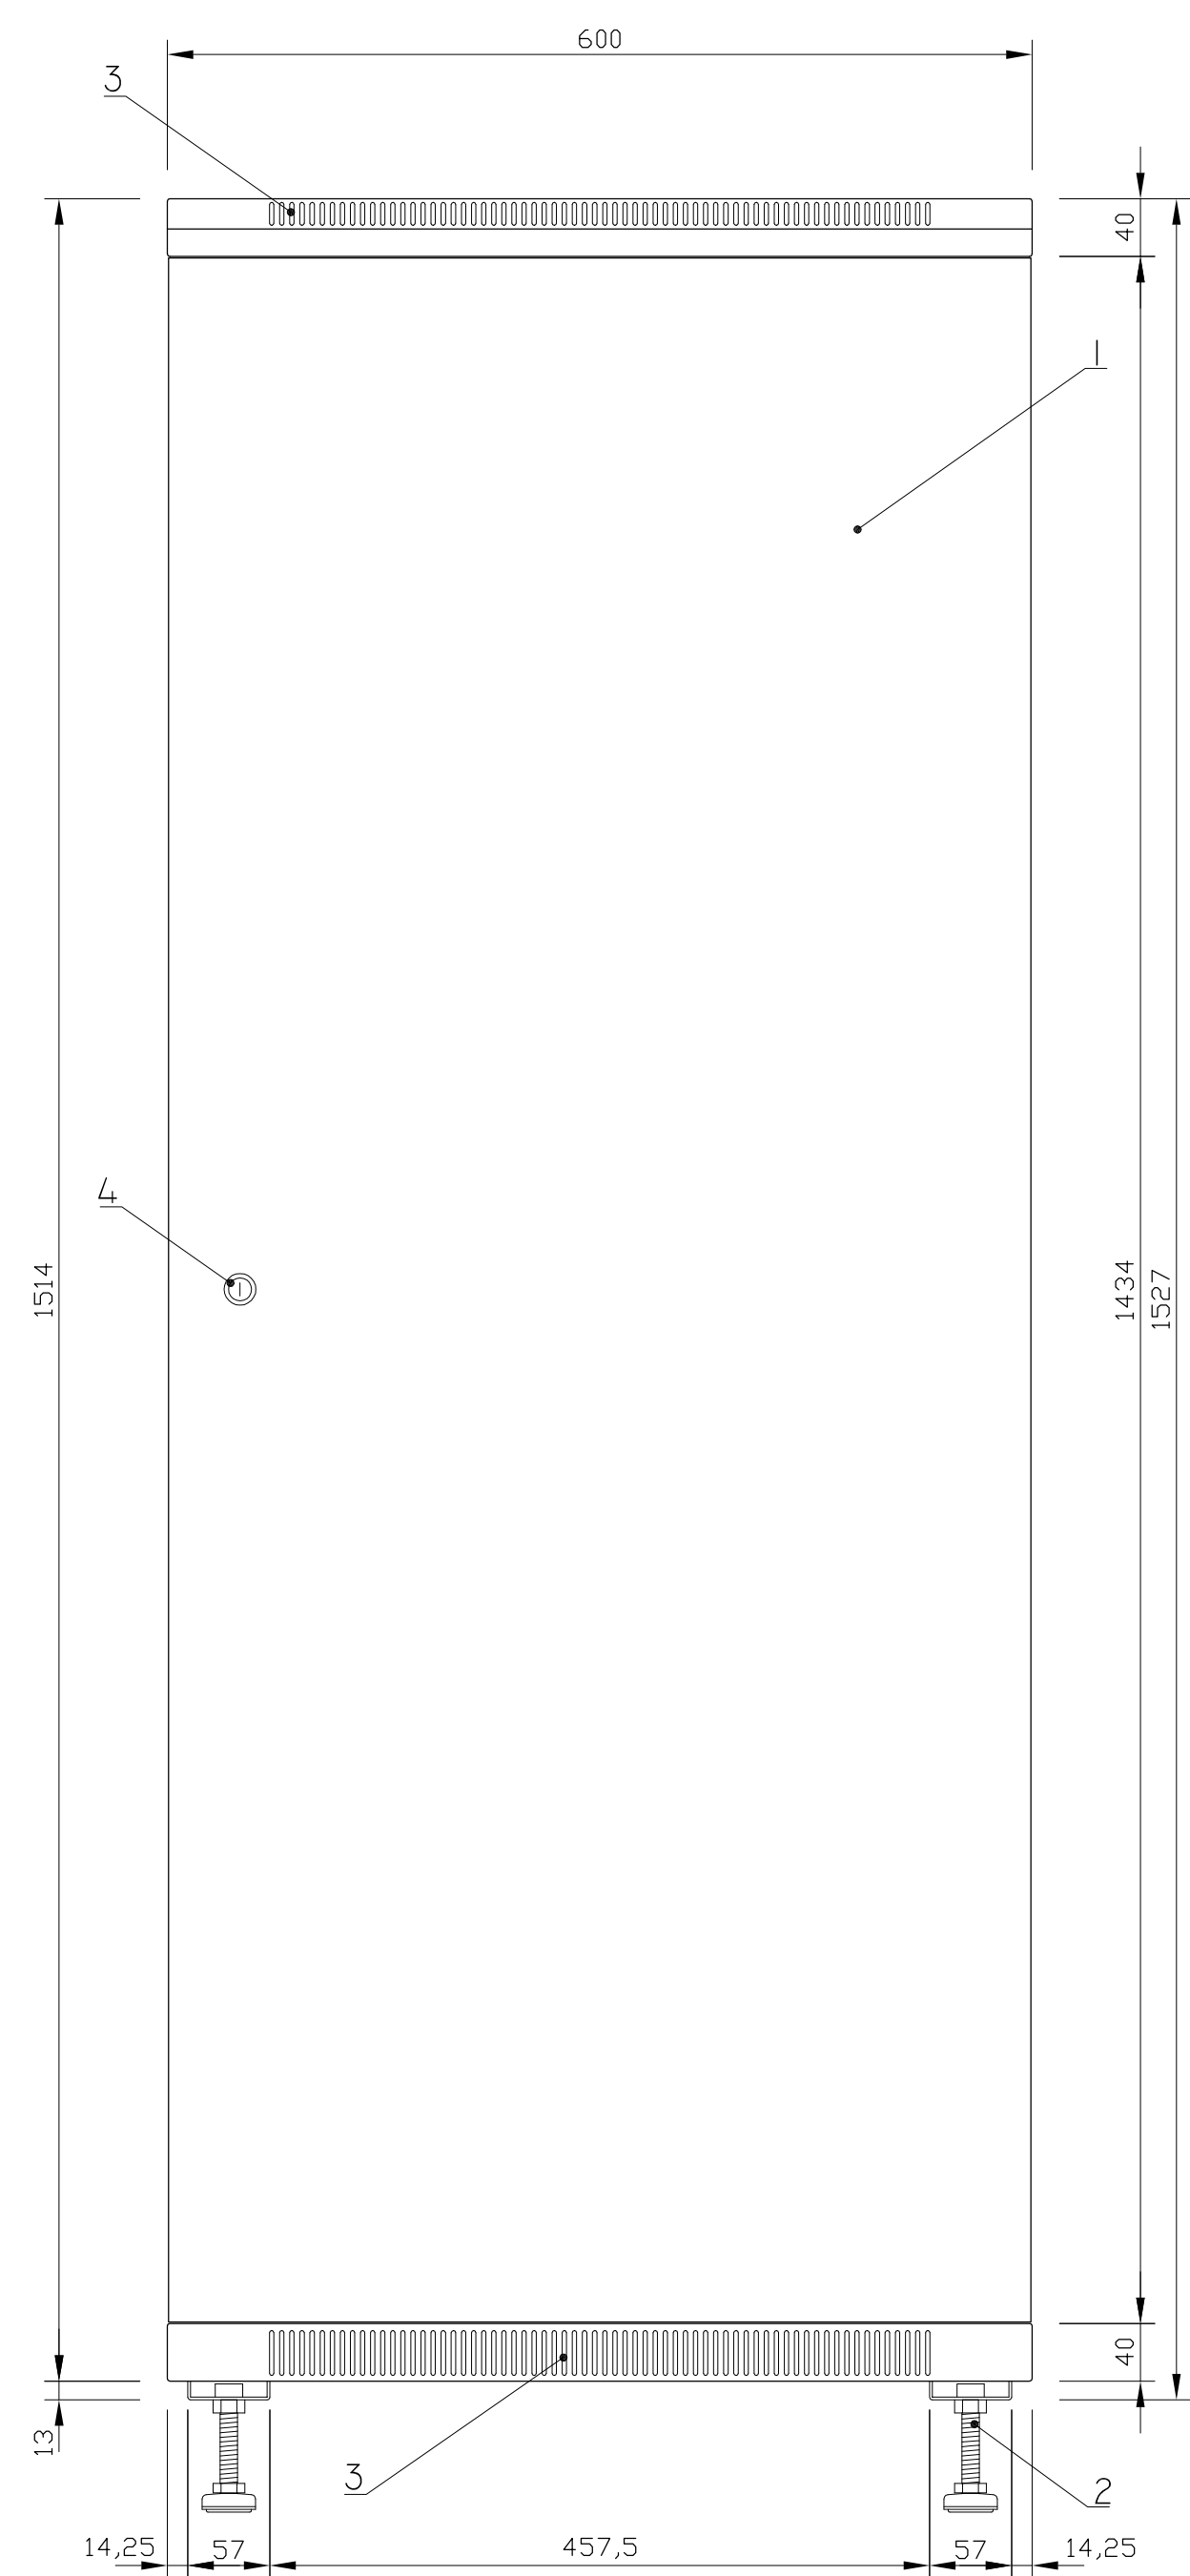

- 1. STEEL REAR DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. REAR DOOR LOCK INSTALLATION SPACE

REAR ELEVATION

019-320-610-112

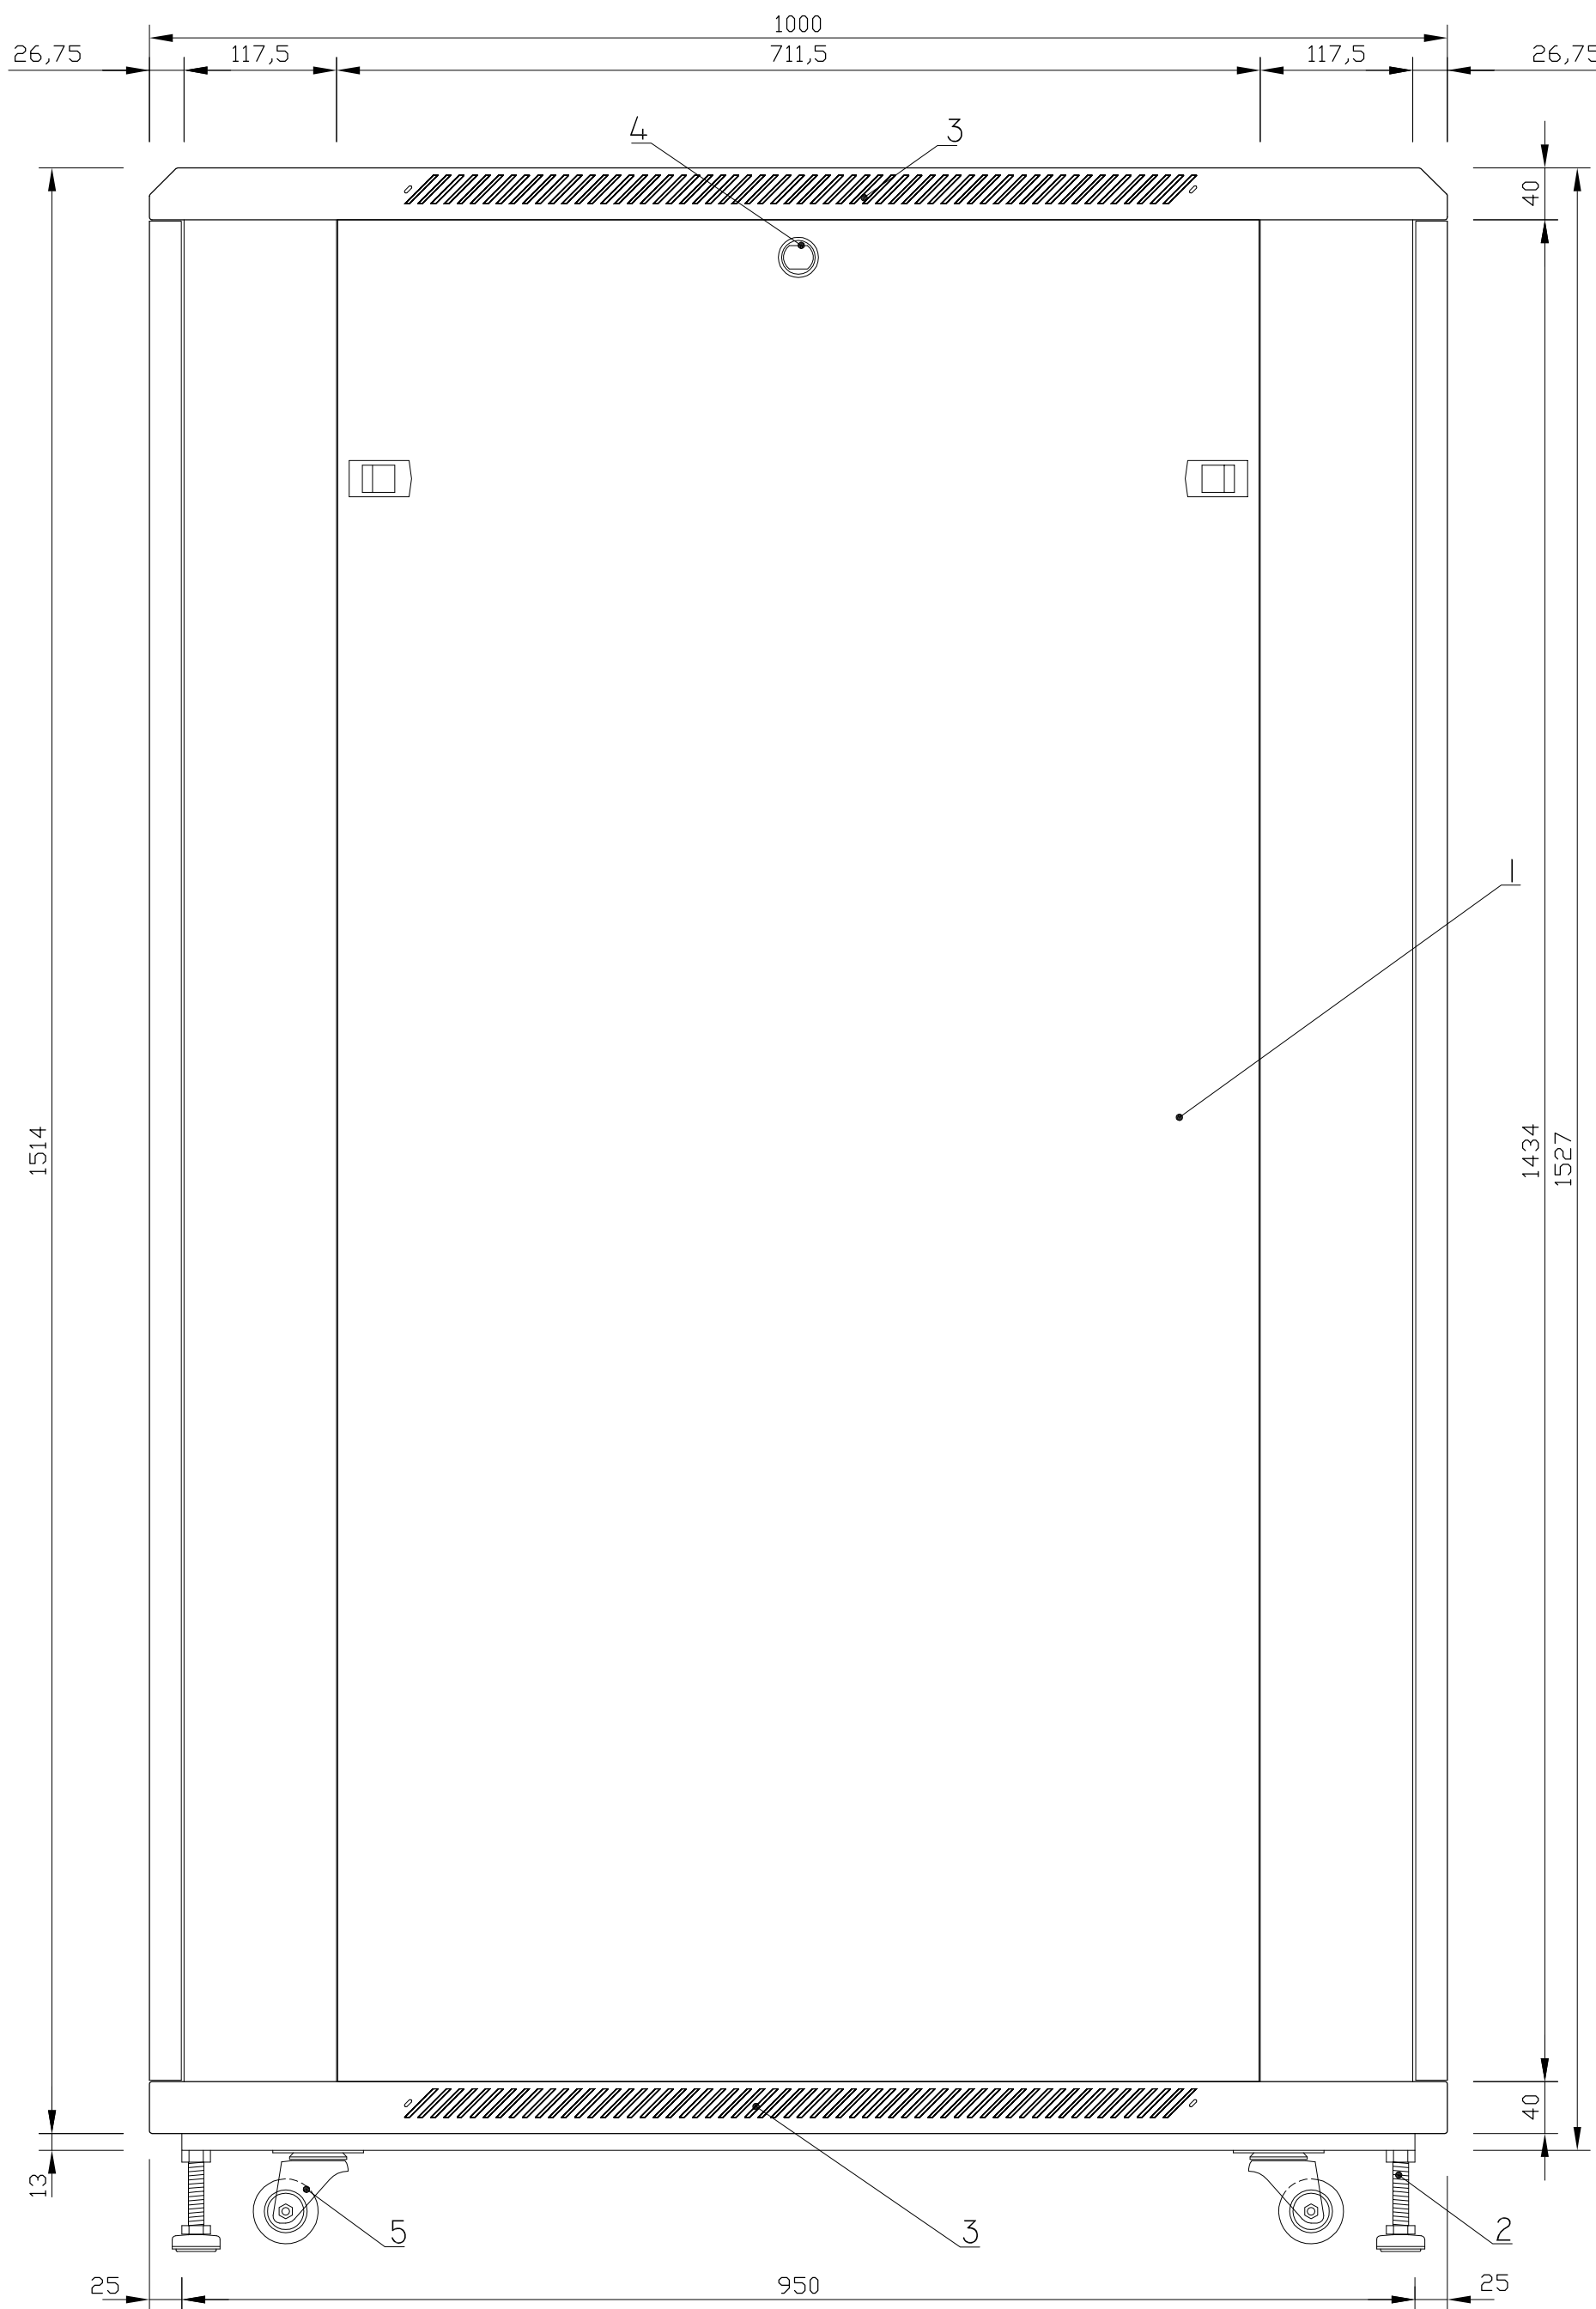

- 1. SIDE PANEL
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. SIDE PANEL LOCK INSTALLATION SPACE
- 5. 2" CASTOR WHEELS

SIDE ELEVATION



TOP ELEVATION