




019-420-610-112

Netrack standing server cabinet
42U/600x1000mm - perforated door

019-420-610-112

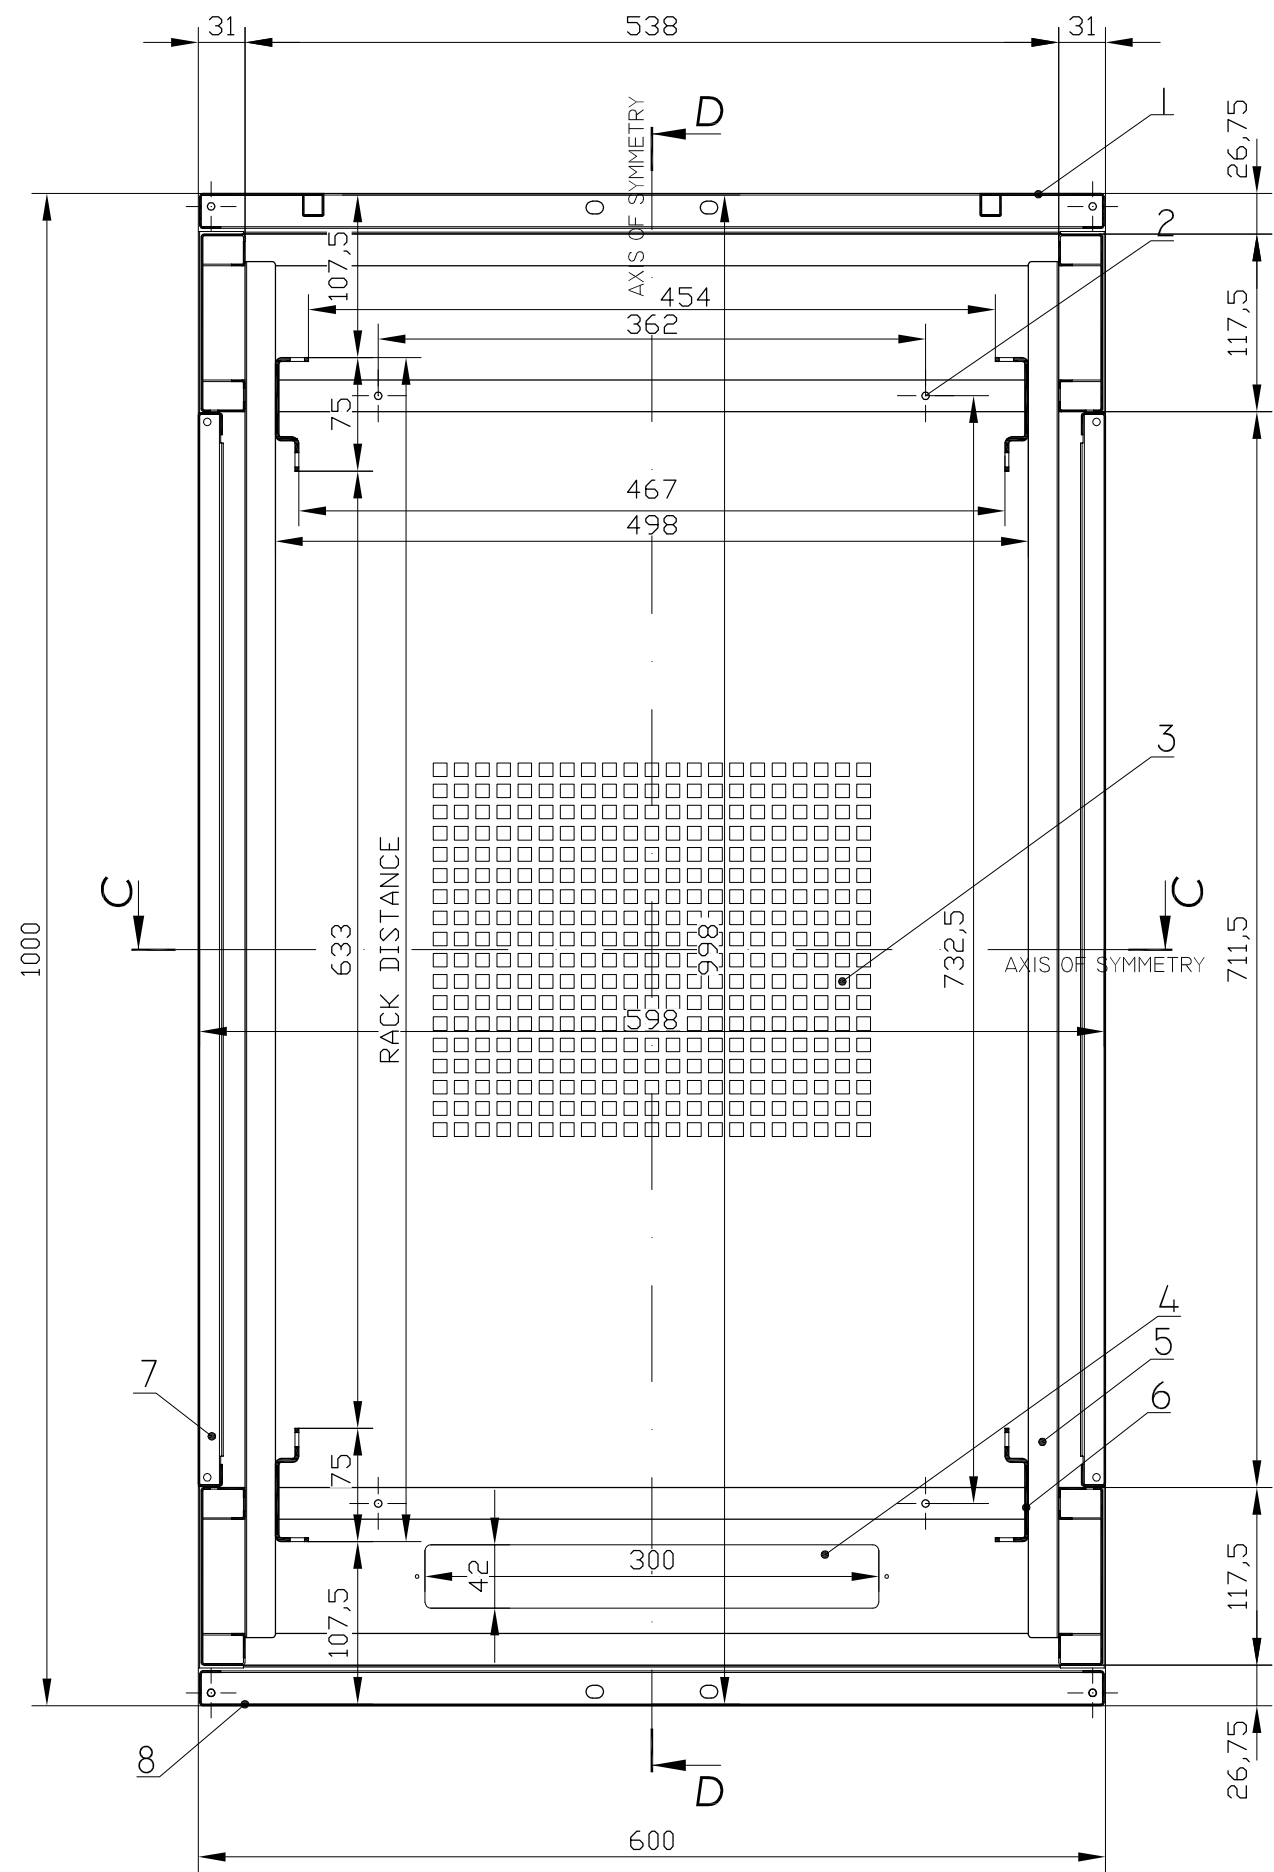


- 1. PERFORATED FRONT DOOR
- 2. HOLE FOR FAN UNIT INSTALLATION
- 3. VENTILATION HOLES
- 4. TOP BACK CABLE ENTRY
- 5. ANGLE MOUNTING BRACKET BAR
- 6. MOUNTING SPARE RACK PROFILE
- 7. SIDE PANEL
- 8. STEEL REAR DOOR


RACK DISTANCES

NETRACK STANDARD	783MM
MAXIMUM	927MM
MINIMUM	167MM

SECTION A-A
- TOP COVER VIEW

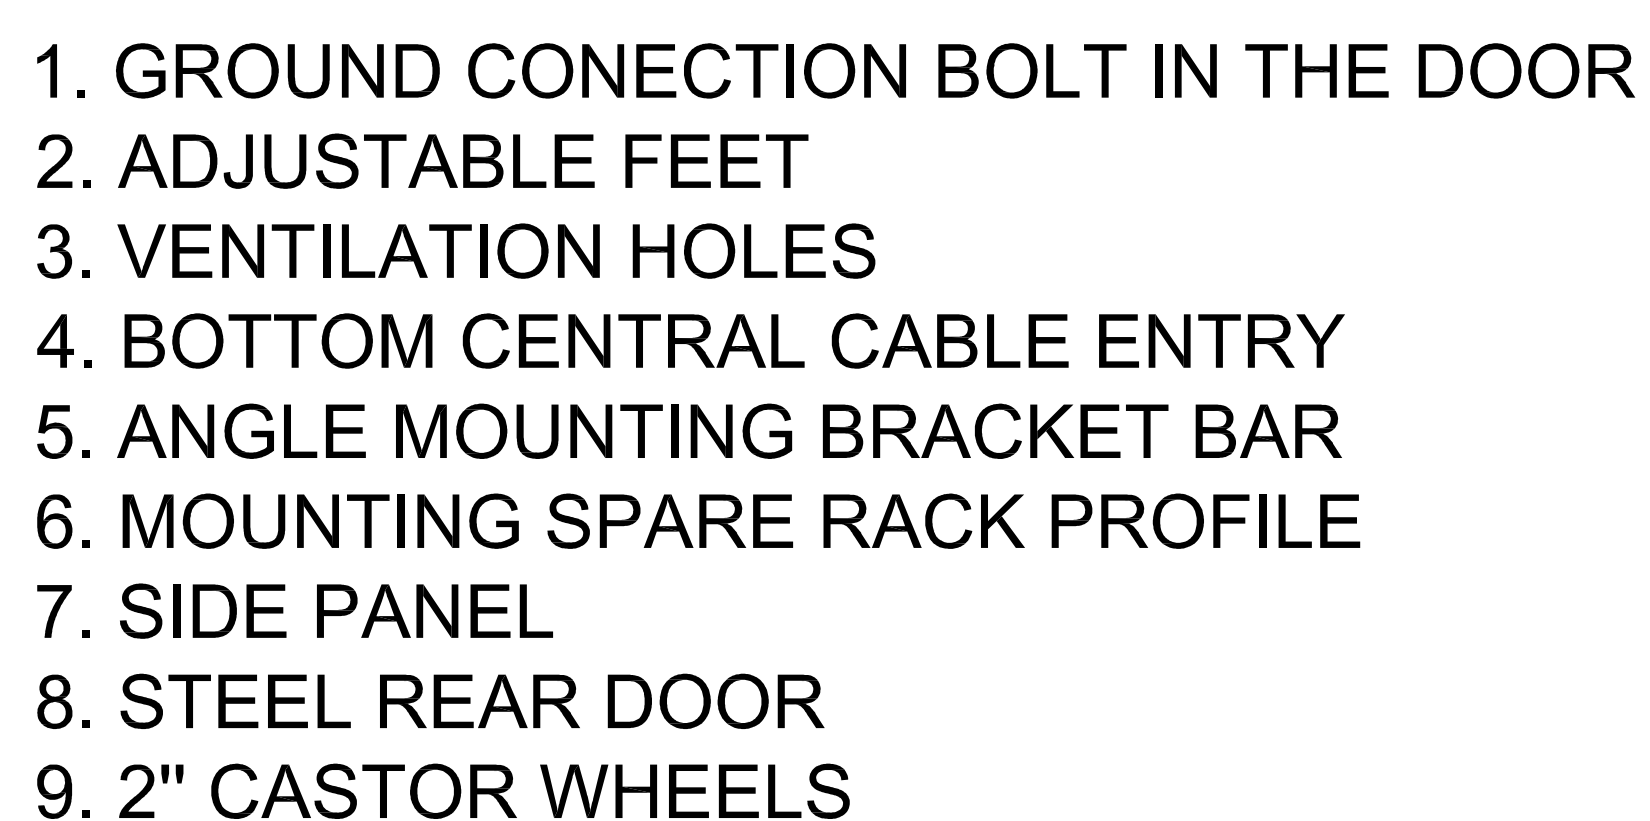

SECTION C-C

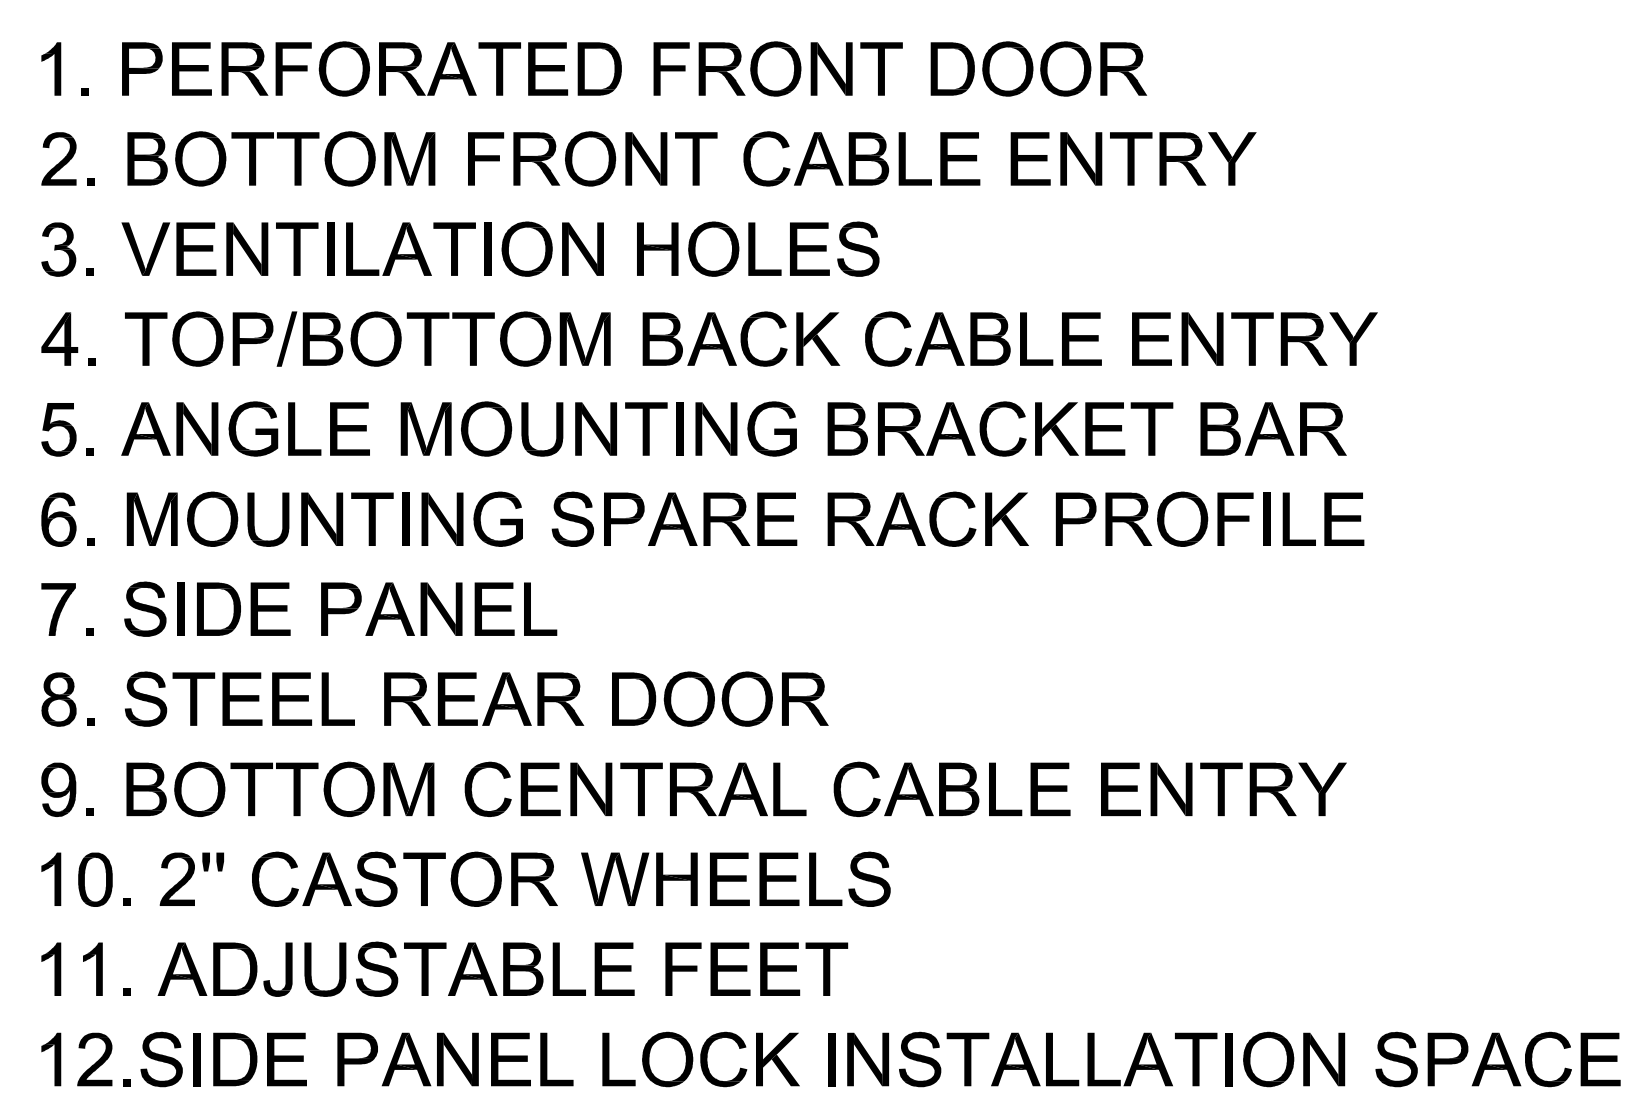


RACK DISTANCES

NETRACK STANDARD	783MM
MAXIMUM	927MM
MINIMUM	167MM

SECTION D-D


019-420-610-112

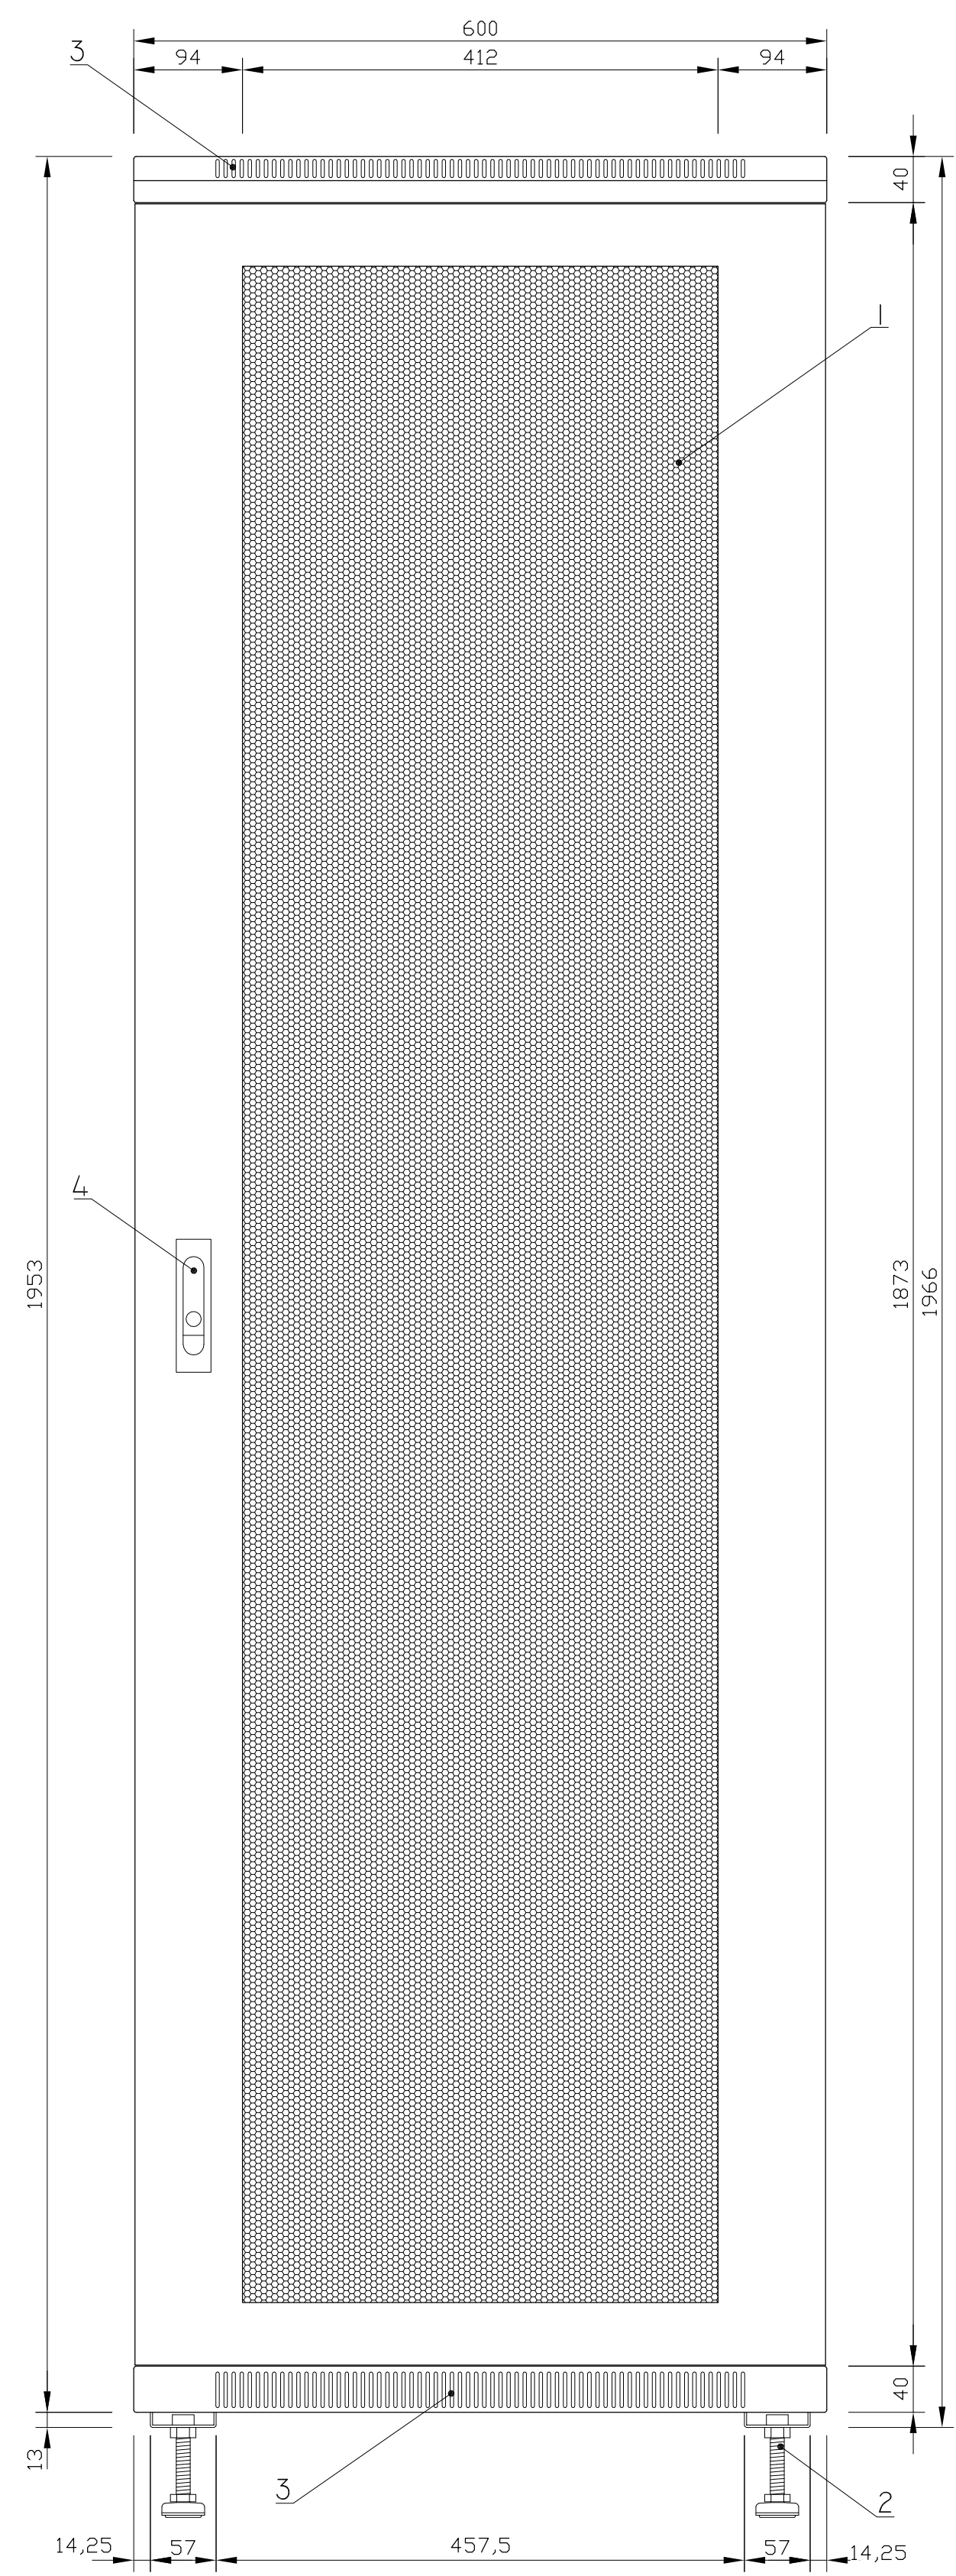

- 1. PERFORATED FRONT DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. FRONT DOOR LOCK INSTALLATION SPACE

FRONT ELEVATION


019-420-610-112

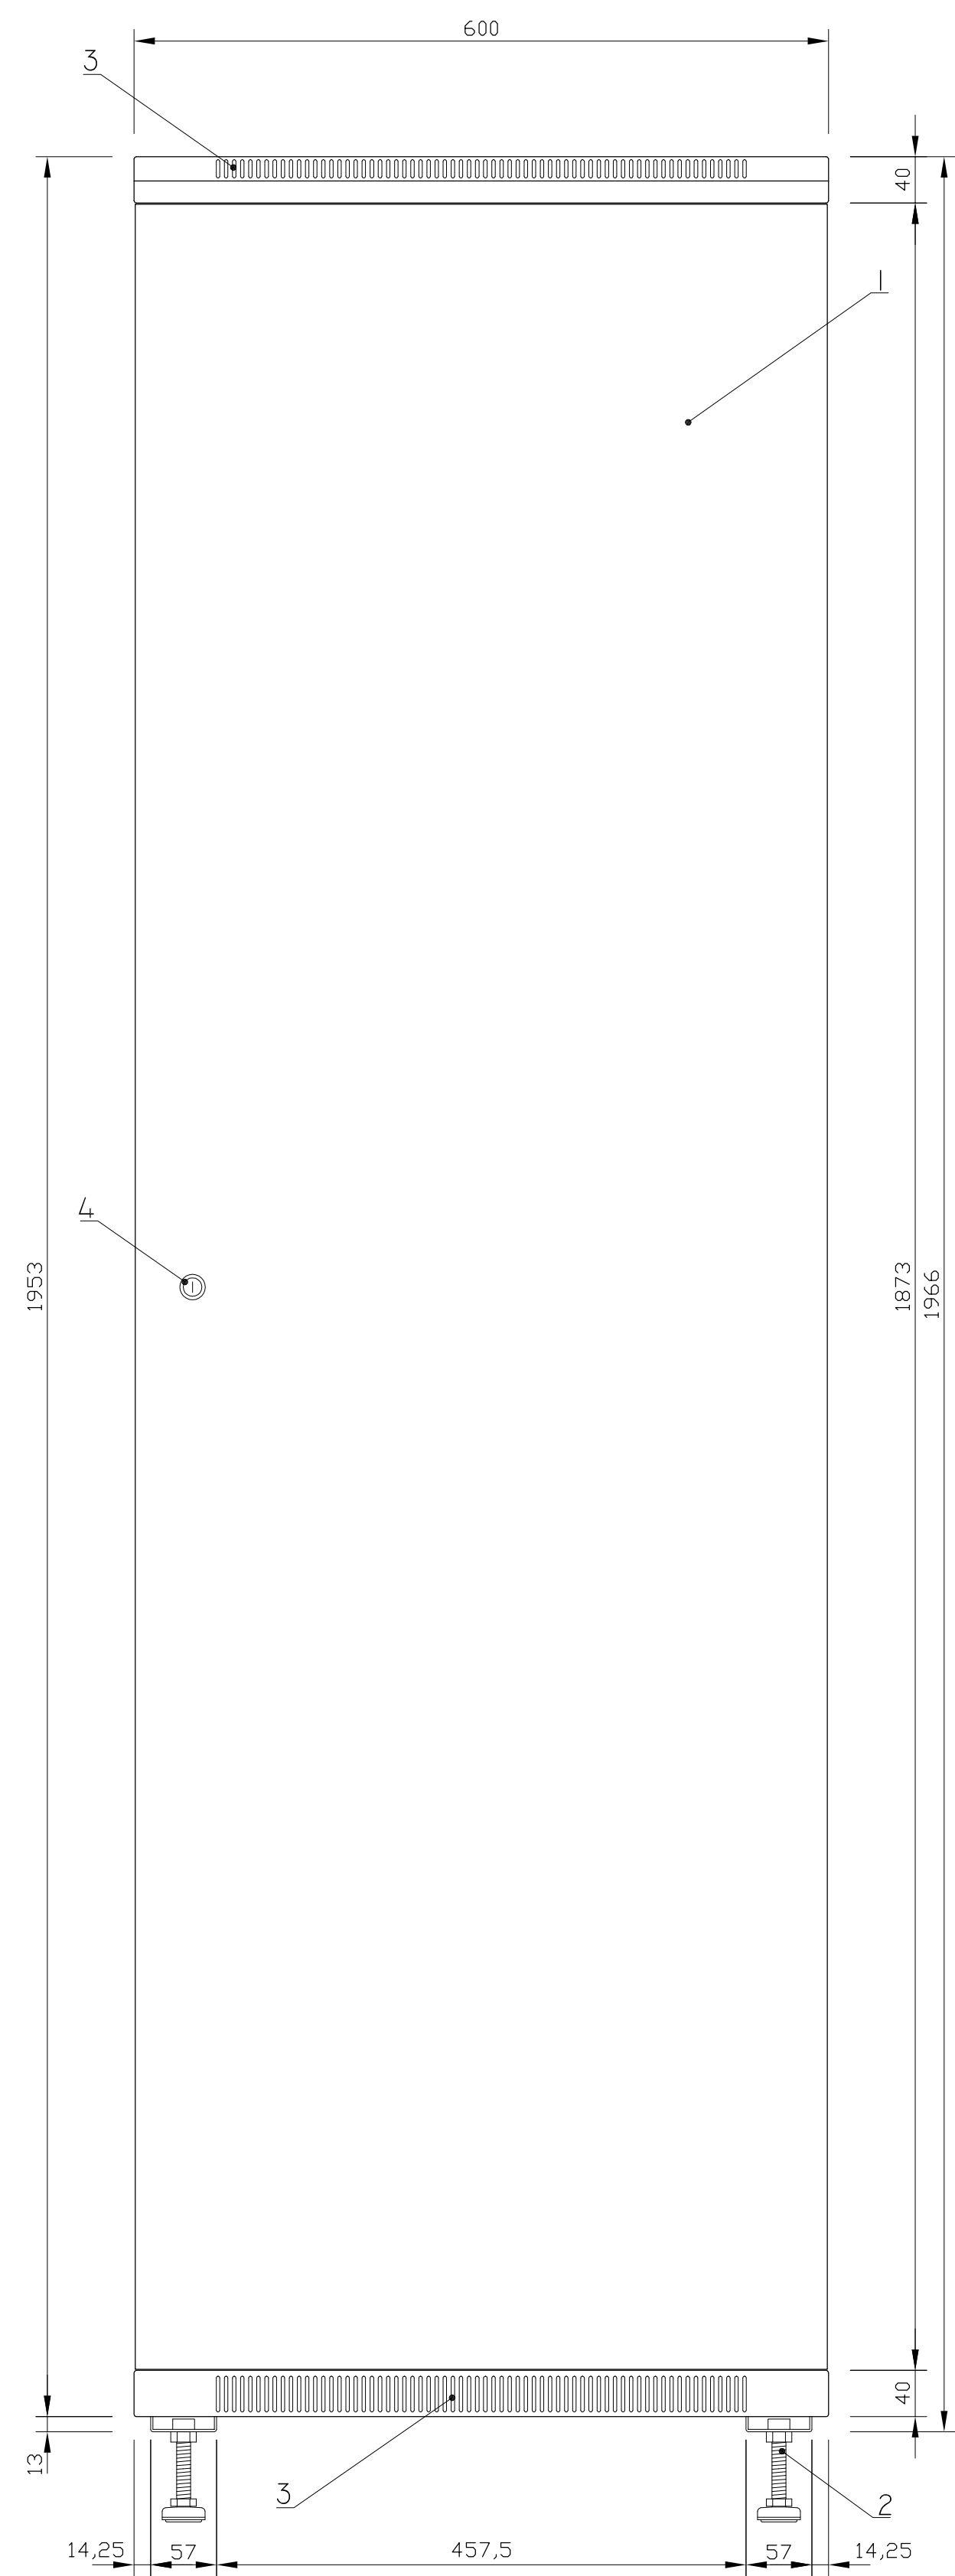

- 1. STEEL REAR DOOR
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. REAR DOOR LOCK INSTALLATION SPACE

REAR ELEVATION


019-420-610-112

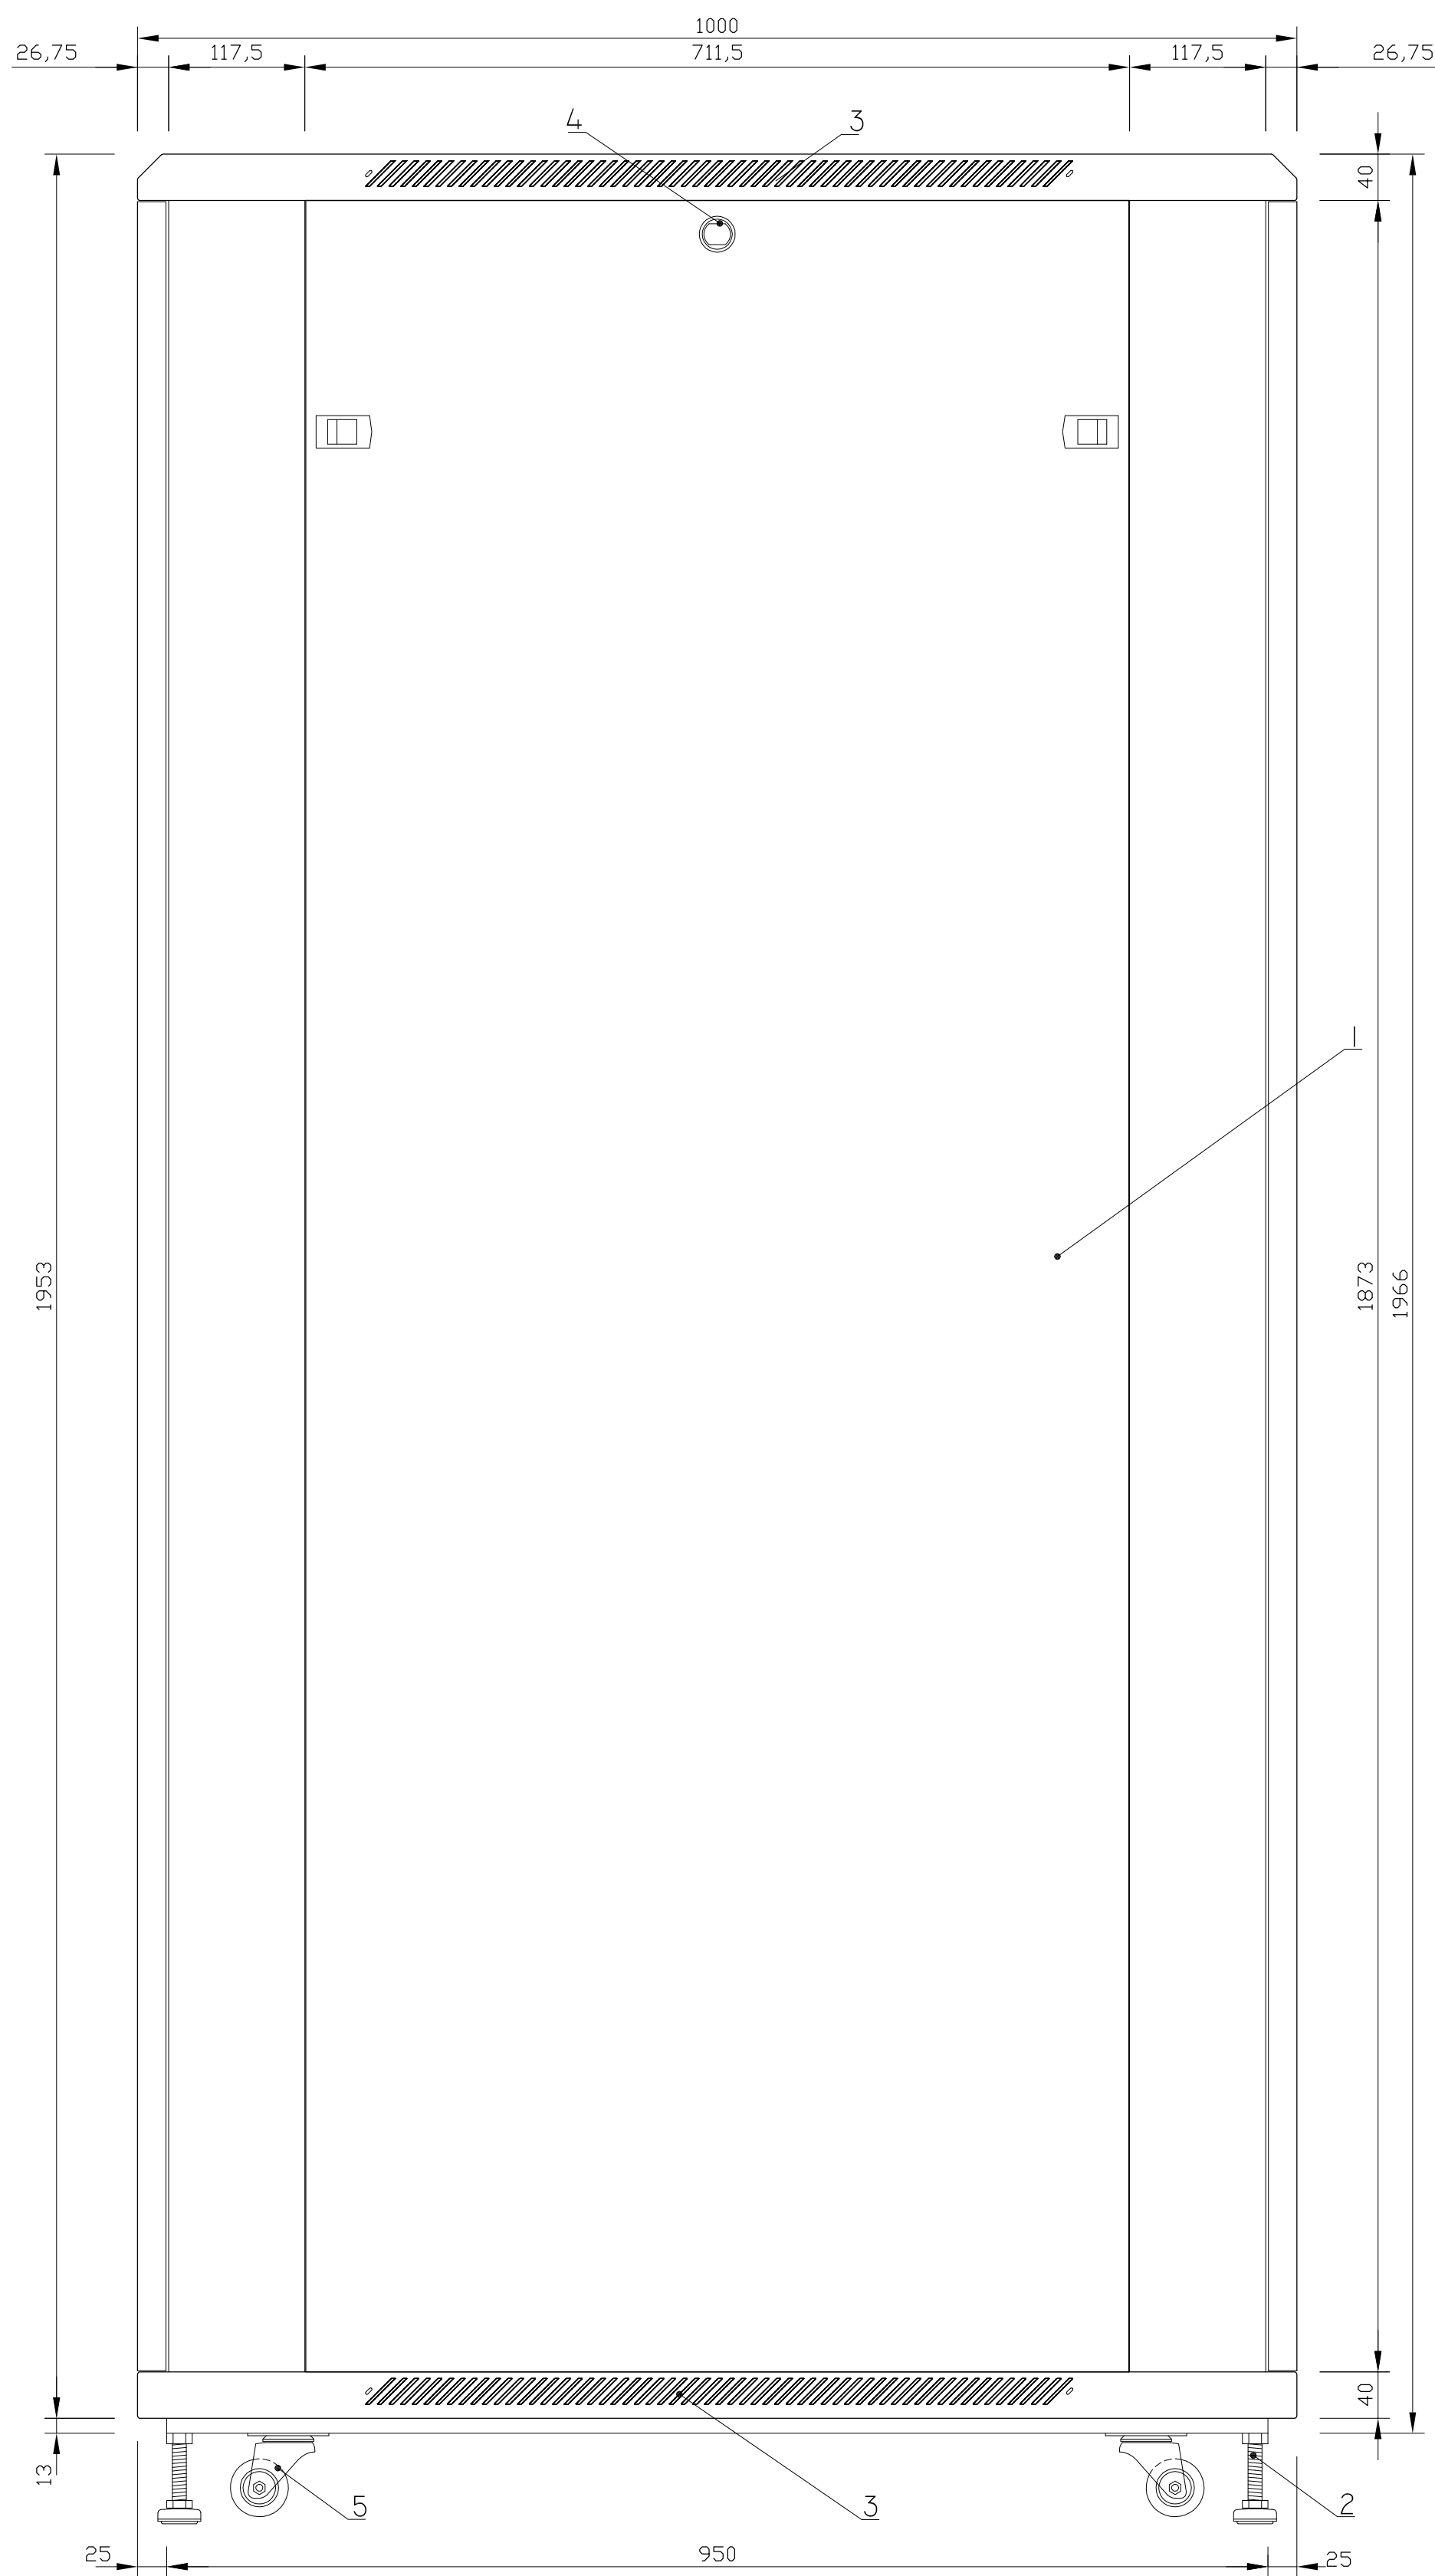

- 1. SIDE PANEL
- 2. ADJUSTABLE FEET
- 3. VENTILATION HOLES
- 4. SIDE PANEL LOCK INSTALLATION SPACE
- 5. 2" CASTOR WHEELS

SIDE ELEVATION

019-420-610-112

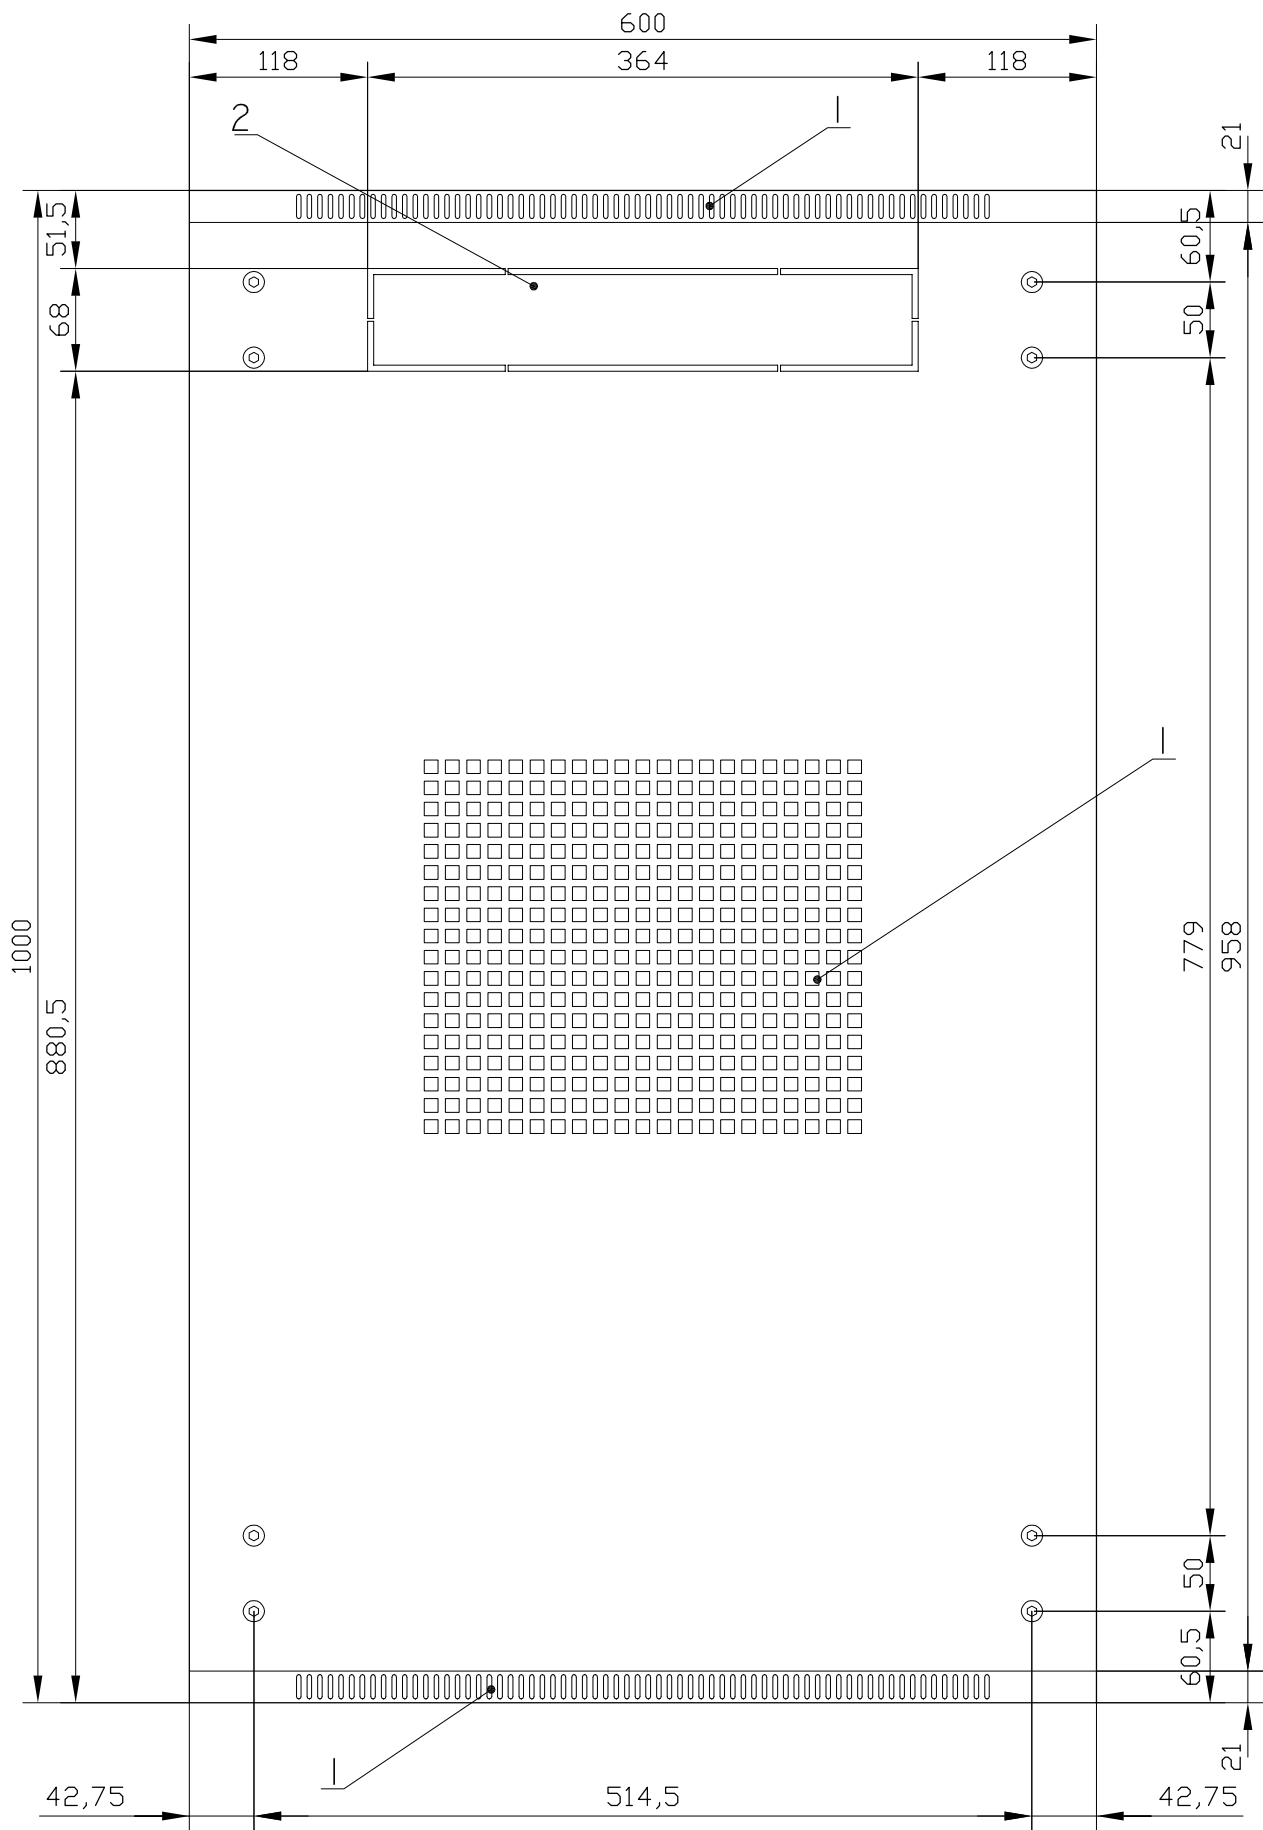

- 1. VENTILATION HOLES
- 2. TOP BACK CABLE ENTRY

TOP ELEVATION